

## Safety key

For lathe chucks with square drive




### Application:

The key has to be firmly pressed into the chuck drive and held there until the clamping procedure is complete. When the pressure is relieved, the key is automatically ejected.

### Execution:

- Ref. no. 210-219 with ejector pin, for lathe chucks with male square drive (tapered rod chuck)

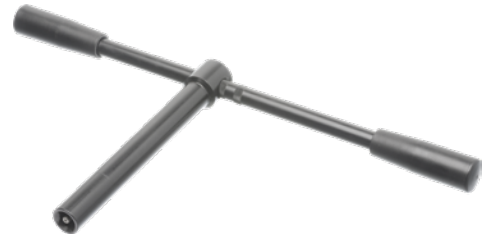

|  |                  |
|--|------------------|
| <b>Art. no.</b>                              | <b>22471 210</b> |
| <b>Brand</b>                                 | RÖHM             |
| <b>Manufacturer Part Number</b>              | 242173           |
| <b>For chuck diameter</b>                    | 160 mm           |
| <b>For lathe chucks with external square</b> | 10 mm            |
| <b>Length</b>                                | 140 mm           |
| <b>Gross Weight</b>                          | 0.370 kg         |
| <b>Product Group</b>                         | 202              |

### EAN

4019208066783