




THIS DRAWING AND SPECIFICATIONS, HEREIN ARE THE CONFIDENTIAL PROPERTY OF SAMAR AND SHALL NOT BE REPRODUCED OR COPIED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION.

REV.	DESCRIPTION	DRAWN / DATE	APPROVED / DATE
0	INITIAL RELEASE	LIN 03/01/2018	BERNINI 03/01/2018

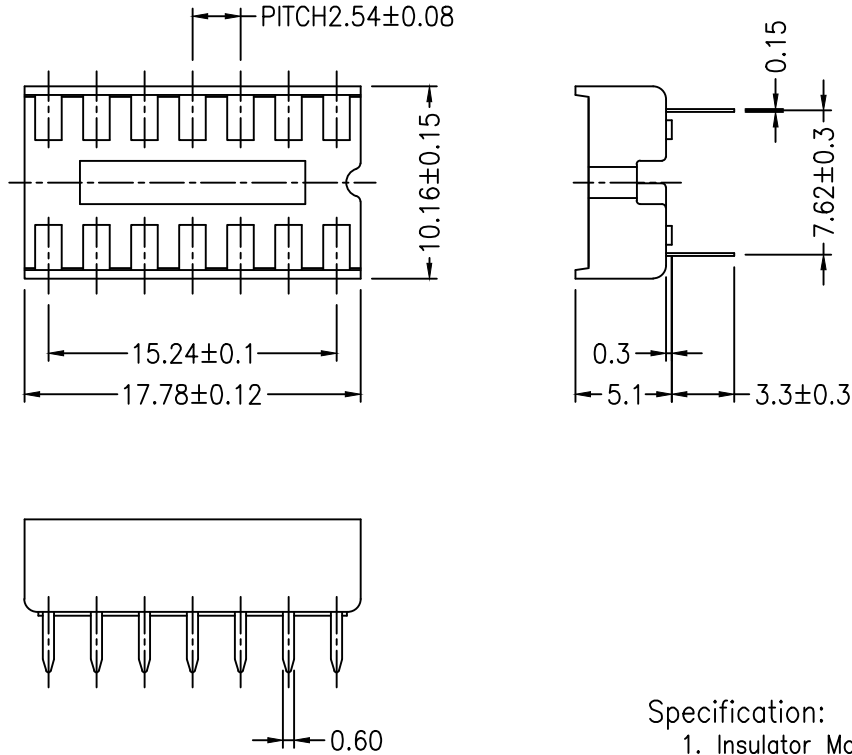

Specification:

1. Insulator Material: PBT & 30% Glass Fiber (UL 94V-0)
2. Contact Resistance: $30M\Omega$ at DC 100MA
3. Insulator Resistance: $1000M\Omega$ Min at DC 250V
4. Current Rating: 1 AMP
5. Dielectric Withstanding Voltage: AC 500V For 1 minute
6. Temperature Rating: $-55^{\circ}C \sim +105^{\circ}C$
7. Contact Material: Phosphor Bronze, Tin-plated

RoHS

DIMENSIONS ARE IN mm [INCH]		TOLERANCES ARE FRACTIONS DECIMALS ANGLES		MATERIAL	P/N	DRAWN	DATE
MOLD NO.		.x ± 0.2 [0.008]		FINISH	28-235	LIN	03/01/2018
28-235		.xx ± 0.12 [0.005]		COLOR	39C1550,14P IC SOCKET		
					SCALE 2.5/1	SIZE A4	SHEET 1 OF 1
					MJ003		