2341474-1 - ACTIVE

LUMAWISE | LUMAWISE Endurance S

TE Internal #: 2341474-1 TE Internal Description: SEALING CAP, RCPT, LUMAWISE ENDURANCE S

View on TE.com >



Connectors > Lighting Connectors > Solid State Lighting > Zhaga Book 18 Street Light Connectors



Lighting Product Type: Accessory

E TE

Housing Color: Dark Gray

Keyed: Yes

Agency & Standard: None

Vented: No

Features

Product Type Features

Lighting Product Type	Accessory
Sealable	Yes
Configuration Features	
Keyed	Yes
Vented	No
Housing Features	
Housing Color	Dark Gray
Industry Standards	
Agency & Standard	None
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

SEALING CAP, RCPT, LUMAWISE ENDURANCE S



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2019 (201) Candidate List Declared Against: JAN 2019 (197) Does not contain REACH SVHC
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUL 2019 (201) Candidate List Declared Against: JAN 2019 (197)
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked.Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles' (Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.


Compatible Parts



Also in the Series | LUMAWISE Endurance S


SEALING CAP, RCPT, LUMAWISE ENDURANCE S



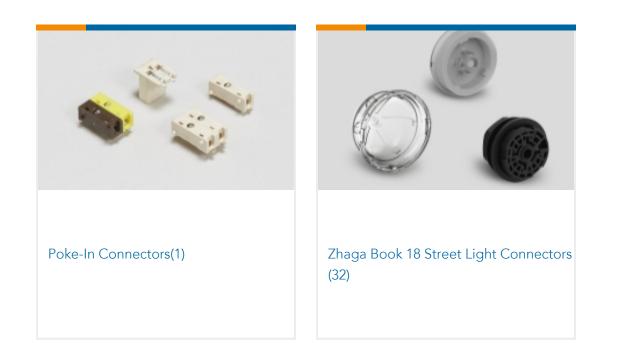

Customers Also Bought





TE Model / Part #9-1879263-8

RP 2B 61K9 0.1% 15PPM 1K RL

Documents

Product Drawings SEALING CAP, RCPT, LUMAWISE ENDURANCE S

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2341474-1_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2341474-1_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2341474-1_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

S For support call+1 800 522 6752

2341474-1

SEALING CAP, RCPT, LUMAWISE ENDURANCE S



Datasheets & Catalog Pages LUMAWISE STREET LIGHT DIMMING AND CONTROL QUICK REFERENCE GUIDE

English

Lumawise Endurance S Modules

English

Product Specifications

Application Specification

English

Agency Approvals LUMAWISE Endurance S CB Test Report

English

LUMAWISE Endurance S CB Certificate

English