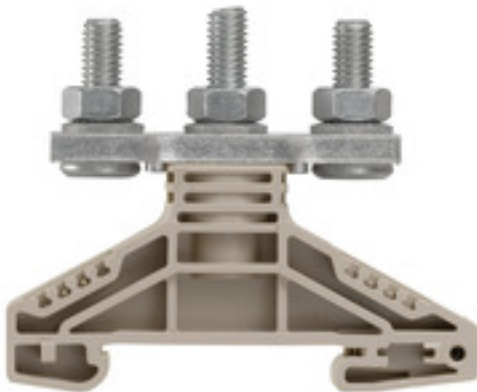


**Bolt-type screw terminals
WF 6/2BZ**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Product image**Klippon® Connect with stud Technology**

Our stud terminals are an established, robust connection alternative for particularly harsh environments. The extensive accessories and quality workmanship ensure high productivity in planning and installation – and sustainable safety in operation..

General ordering data

Type	WF 6/2BZ
Order No.	1789770000
Version	Bolt-type screw terminals, Feed-through terminal, Rated cross-section: 35 mm ² , Threaded stud connection
GTIN (EAN)	4032248251124
Qty.	25 pc(s).

Creation date 11 March 2020 11:28:09 CET

Catalogue status 06.03.2020 / We reserve the right to make technical changes.

Bolt-type screw terminals
WF 6/2BZ

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Dimensions and weights**

Width	17.8 mm	Width (inches)	0.701 inch
Height	67 mm	Height (inches)	2.638 inch
Depth	54.5 mm	Depth (inches)	2.146 inch
Net weight	66.754 g		

Temperatures

Storage temperature, max.	40 °C	Storage temperature, min.	10 °C
Storage temperature	10 °C...40 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	120 °C		

Material data

Material	Wemid	Colour	dark beige
UL 94 flammability rating	V-0		

System specifications

Number of levels	1	Number of clamping points per level	3
Levels cross-connected internally	No	PE connection	No
Rail	TS 35		

Additional technical data

Explosion-tested version	No	Open sides	Open
Type of mounting	Snap-on		

CSA rating data

Certificate No. (CSA)	200039-1244019	Current size C (CSA)	115 A
Voltage size C (CSA)	1000 V	Wire cross section max. (CSA)	2 AWG

Conductors for clamping (rated connection)

2 x cable lugs DIN 46 234	2.5 to 35 mm ²	2 x cable lugs DIN 46 235	6...25 mm ²
Cable lug to DIN 46234	2.5...35 mm ²	Cable lug to DIN 46235	6...25 mm ²
Clamping range, max.	35 mm ²	Clamping range, min.	2.5 mm ²
Number of connections	3	Stud size for spade connection	M 6
Tightening torque, max.	6 Nm	Tightening torque, min.	3 Nm
Type of connection	Threaded stud connection		

Rating data

Rated cross-section	35 mm ²	Rated voltage	1,000 V
Rated current	125 A	Current at maximum wires	125 A
Volume resistance according to IEC 60947-7-x	0.26 mΩ	Power loss in accordance with IEC 60947-7-x	4 W
Rated impulse withstand voltage	8 kV	Pollution severity	3

Bolt-type screw terminals
WF 6/2BZ

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data**Stud connection**

2 x cable lugs DIN 46 234	2.5 to 35 mm ²	2 x cable lugs DIN 46 235	6...25 mm ²
Cable lug to DIN 46234	2.5...35 mm ²	Cable lug to DIN 46235	6...25 mm ²
Stud size for spade connection	M 6	Tightening torque, max.	6 Nm
Tightening torque, min.	3 Nm		

UL rating data

Certificate No. (cURus)	E60693	Conductor size Factory wiring max. (cURus)	2 AWG
Conductor size Factory wiring min. (cURus)	2 AWG	Current size C (cURus)	115 A
Voltage size C (cURus)	1000 V		

Classifications

ETIM 6.0	EC000897	ETIM 7.0	EC000897
eClass 9.0	27-14-11-20	eClass 9.1	27-14-11-20
eClass 10.0	27-14-11-20	UNSPSC	30-21-18-01

Approvals

Approvals



ROHS Conform

Downloads

Approval/Certificate/Document of Conformity	CB Test Certificate CB Certificate DE_PT1004_20160418_850_ISSUE01.pdf
Brochure/Catalogue	CAT 1 TERM 16/17 EN
Engineering Data	EPLAN_WSCAD
Engineering Data	STEP
User Documentation	StorageConditionsTerminalBlocks

Safety noteSafety notice [Safety Information](#)

Data sheet

**Bolt-type screw terminals
WF 6/2BZ**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Drawings

