



(Figure similar)

Figure	Type	Inputs analog	Outputs analog	Input voltage (sensor supply) <sup>(1)</sup>	Output voltage (actuator supply) <sup>(2)</sup>	AS-i address <sup>(3)</sup>	Art. no.
	IP20, 22,5 mm x 92 mm 4 x COMBICON	2 x 4 ... 20 mA / 0 ... 10 V	–	selectable, from AS-i or AUX, default AS-i	–	1 AB slave	<b>BWU1897</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	2 x 4 ... 20 mA / 0 ... 10 V	–	selectable, from AS-i or AUX, default AS-i	–	1 single slave	<b>BWU1345</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	–	2 x 0 ... 20 mA / 0 ... 10 V	–	selectable, from AS-i or AUX, default AS-i	1 single slave	<b>BWU1412</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	–	2 x 0 ... 20 mA / 0 ... 10 V	–	selectable, from AS-i or AUX, default AUX	1 single slave	<b>BWU1727</b>
	IP20, 22,5 mm x 92 mm 4 x COMBICON	–	2 x -10 V ... +10 V	–	out of AUX	1 single slave	<b>BWU2224</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x 4 ... 20 mA	–	from AS-i or AUX, auto switching	–	1 single slave	<b>BWU1364</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x 0 ... 10 V	–	from AS-i or AUX, auto switching	–	1 single slave	<b>BWU1365</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x Pt100	–	out of AS-i	–	1 single slave	<b>BWU1368</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x thermocouple type J	–	out of AS-i	–	1 single slave	<b>BWU1933</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	4 x thermocouple type K	–	out of AS-i	–	1 single slave	<b>BWU2243</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	–	4 x 0 ... 20 mA	–	from AS-i or AUX, auto switching	1 single slave	<b>BWU1366</b>
	IP20, 22,5 mm x 105 mm 6 x COMBICON	–	4 x 0 ... 10 V	–	from AS-i or AUX, auto switching	1 single slave	<b>BWU1367</b>

- (1) **Input voltage (sensor supply):** inputs are supplied by AS-i or by AUX (auxiliary 24 V power). If supplied by AS-i, inputs shall not be connected to earth or to external potential.
- (2) **Output voltage (actuator supply):** outputs are supplied by AS-i or by AUX (auxiliary 24 V power). If supplied by AS-i, outputs shall not be connected to earth or to external potential
- (3) **AS-i address:** 1 AB Slave (max. 62 AB Slaves/AS-i network), 2 AB Slaves (max. 31 modules with 2 AB Slaves), Single Slaves (max. 31 Single Slaves/AS-i network), mixed use allowed.  
For modules with two slaves the second slave is turned off as long as the first slave is addressed to address "0".  
Upon request, slaves are available with specific AS-i Slave profiles.

Article No.	BWU1897	BWU1345	BWU1364	BWU1365	BWU1368	BWU1933	BWU2243
<b>General Data</b>							
Device type	Input						
<b>Connection</b>							
AS-i/AUX connection	COMBICON clamp						
Periphery connection	COMBICON clamp						
<b>AS-i</b>							
Profile	S-7.A.9		S-7.3				
Address	1 AB slave		1 single slave				
Required Master profile	≥M4		≥M3				
Since AS-i specification	3.0		2.1				
Operating voltage	30 V (18 ...31,6 V)	30 V (19 ...31,6 V)	30 V (24 ...31,6 V)	30 V (18 ...31,6 V)			
Max. current consumption	< 80 mA					< 100 mA	
<b>AUX</b>							
Voltage	24 V (18 ... 30 V)					-	
Max. current consumption	500 mA					-	
<b>Input</b>							
Number	2 (4 ... 20 mA/ 0 ... 10 V)		4 (4 ... 20 mA)	4 (0 ... 10 V)	4 (Pt100)	4 (thermo- couple type J)	4 (thermo- couple type K)
Resolution	14 Bit (1 µA / 1mV)	16 Bit (1 µA / 1 mV)	16 Bit (1 µA)	16 Bit (1 mV)	16 Bit (0,1 °C)	16 Bit (0,1 °C)	
Range of value	4000 ... 20000 dec. / 0 ... 10000 dec.		4000 ... 20000 dec.	0 ... 10000 dec.	-200 °C ... +850 °C	-200 °C ... +760 °C	
Internal resistance	50 Ω / 100 kΩ					-	
Max. input voltage	25 V					-	
Max. input current	40 mA					-	
Power supply	out of AS-i or out of AUX					out of AS-i	
Power supply of attached sensors	500 mA out of AUX 50 mA out of AS-i					50 mA	
<b>Output</b>							
Resolution	-						
Range of value	-						
Resistance of the actuators	-						
Max. output current	-						
Power supply	-						
Power supply of attached actuators	-						
<b>Environment</b>							
Applied standards	EN 61000-6-2 EN 61000-6-4 EN 60529						
Operating altitude	max. 2000 m						
Operating temperature	0 °C ... +70 °C						
Storage temperature	-25 °C ... +85 °C						
Housing	plastic, for DIN rail mounting						
Pollution degree	2						
Protection category	IP20						
Voltage of insulation	≥ 500 V						
Weight	120 g			145 g			
Dimension (W / H / D in mm)	22,5 / 99 / 92			25 / 105 / 114			

Article No.	BWU1366	BWU1367	BWU1412	BWU1727	BWU2224
<b>General Data</b>					
Device type	output				
<b>Connection</b>					
AS-i/AUX connection	COMBICON clamps				
Periphery connection	COMBICON clamps				
<b>AS-i</b>					
Profile	S-7.3			S-7.3.5	
Address	1 single slave				
Required Master profile	≥ M3				
Since AS-i specification	2.1				
Operating voltage	30 V (24 ... 31,6 V)	30 V (18 ... 31,6 V)			
Max. current consumption	<80 mA			<100 mA	
<b>AUX</b>					
Voltage	24 V (18 ... 30 V)				
Max. current consumption	500 mA				
<b>Input</b>					
Resolution	-				
Range of value	-				
Internal resistance	-				
Max. input voltage	-				
Max. input current	-				
Power supply	-				
Power supply of attached sensors	-				
<b>Output</b>					
Number	4 (0 ... 20 mA)	4 (0 ... 10 V)	2 (0 ... 20 mA/0 ... 10 V)		2 (-10 V ... +10 V)
Resolution	16 Bit (1 µA)	16 Bit (1 mV)	16 Bit (1 µA / 1 mV)		16 Bit
Range of value	0 ... 20000 dec.	0 ... 10000 dec.	0 ... 20000 dec. / 0 ... 10000 dec.		-10000 ... +10000 dec.
Resistance of the actuators	-			≥1 kΩ	
Max. output current	-			10 mA	
Power supply	out of AS-i or out of AUX				out of AUX
Power supply of attached actuators	500 mA out of AUX 50 mA out of AS-i			500 mA	
<b>Environment</b>					
Applied standards	EN 61000-6-2 EN 61000-6-4 EN 60529				
Operating altitude	max. 2000 m				
Operating temperature	0 °C ... +70 °C			0 °C ... +60 °C	
Storage temperature	-25 °C ... +85 °C				
Housing	plastic, for DIN rail mounting				
Pollution degree	2				
Protection category	IP20				
Voltage of insulation	≥ 500 V				
Weight	145 g		120 g		
Dimension (W / H / D in mm)	22,5 / 105 / 114		22,5 / 99 / 92		

## Wiring rules

Push-in terminals	
<b>General</b>	
Nominal cross section	2,5 mm <sup>2</sup>
<b>Conductor cross section</b>	
Conductor cross section solid	0,2 ... 2,5 mm <sup>2</sup>
Conductor cross section flexible	0,2 ... 2,5 mm <sup>2</sup>
Conductor cross section flexible, with ferrule	without plastic sleeve: 0,2 ... 2,5 mm <sup>2</sup>
	with plastic sleeve: 0,25 ... 2,5 mm <sup>2</sup>
2 conductors with same cross section, stranded, with TWIN ferrules	without plastic sleeve: 0,5 ... 1,5 mm <sup>2</sup>
AWG	24 ... 14
Stripped insulation length	10 mm

Programming of input					
Bit setting	Article No.				
	BWU1345	BWU1364 BWU1365	BWU1368	BWU1897	BWU1933 BWU2243
<b>P0:</b>					
0: 60 H filter in A/D converter active 1: 50 H filter in A/D converter active	•	•	•	•	•
<b>P1:</b>					
0: both channels in current mode and without broken wire recognition 1: normal operation	-	-	-	•	-
0: channel 2 is not projected 1: channel 2 is projected	•	-	-	-	-
Analog module is switched on-/off (bit combination P1 and P2)	-	•	-	-	-
A peripheral fault can be released through channel X (bit combination P1 and P2)	-	-	•	-	•
<b>P2:</b>					
1: peripheral fault is indicated 0: peripheral fault is not indicated	•	-	-	•	-
Analog modul is switched on-/off (bit combination P1 and P2)	-	•	-	-	-
A peripheral fault can be released through channel X (bit combination P1 and P2)	-	-	•	-	•
<b>P3:</b>					
0: both channels in current mode and without broken wire recognition 1: normal operation	•	-	-	-	-
0: peripheral fault is not indicated 1: peripheral fault is indicated	-	•	-	-	-
0: 4 wire-mode 1: 2 wire-mode	-	-	•	-	-
0: external cold-junction compensation 1: internal cold-junction compensation	-	-	-	-	•

Combination of input bits P1 and P2					
BWU1364, BWU1365			BWU1368, BWU1933, BWU2243		
Channel c.X is			Peripheral fault can be released through channel		
P1	P2	c.1	c.2	c.3	c.4
0	0	on	off	off	off
0	1	on	on	off	off
1	0	on	on	on	off
1	1	on	on	on	on


  

P1	P2	1	2	3	4
0	0	yes	no	no	no
0	1	yes	yes	no	no
1	0	yes	yes	yes	no
1	1	yes	yes	yes	yes

Programming of output			
Bit setting	Article No.		
	BWU1366, BWU1367	BWU1412, BWU1727	BWU2224
<b>P0:</b>			
0: mode of channel 1 and 2 (bit combination P1 and P3) 1: automatic mode recognition	-	•	-
0: profile is not monitored 1: profile is monitored:	•	-	-
<b>P1:</b>			
0: channel 1 is in mode voltage module 1: channel 1 is in mode current module	-	•	-
<b>P2:</b>			
0: peripheral fault is not indicated 1: peripheral fault is indicated	•	•	•
<b>P3:</b>			
0: channel 2 is in mode voltage module 1: channel 2 is in mode current module	-	•	-

Programming notes						
Article no.	ID Code	ID1 Code	ID2 Code	IO Code		
BWU1345	3 <sub>hex</sub>	-	D <sub>hex</sub>	7 <sub>hex</sub>		
BWU1364, BWU1365, BWU1368, BWU1933, BWU2243	3 <sub>hex</sub>	-	E <sub>hex</sub>	7 <sub>hex</sub>		
BWU1366, BWU1367	3 <sub>hex</sub>	-	6 <sub>hex</sub>	7 <sub>hex</sub>		
BWU1412, BWU1727	3 <sub>hex</sub>	-	5 <sub>hex</sub>	7 <sub>hex</sub>		
BWU1897 <sup>(1)</sup>	A <sub>hex</sub>	Code-Definition		9 <sub>hex</sub>	7 <sub>hex</sub>	
		ID1	14 bit			12 Bit
		channel 1	0; 2; 3			1
		channel 1 and 2	4; 5; 7 (default)	6		
BWU2224	3 <sub>hex</sub>	F <sub>hex</sub> (default)	5 <sub>hex</sub>	7 <sub>hex</sub>		

<sup>(1)</sup> BWU1897 can transfer either 12 or 14 bit-values. Via ID1 the data capacity and the channel number can be defined.

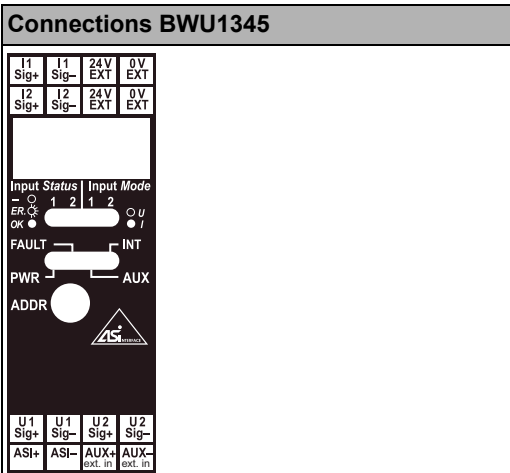


**LEDs BWU1345**

PWR (green)	AS-i voltage
FAULT (red)	AS-i communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
INT (green)	Voltage supply for the analog part out of AS-i
Analog 1 (green)	State of channel 1
Analog 2 (green)	State of channel 2
Analog 1 (green)	On: current measurement; off: voltage measurement
Analog 2 (green)	On: current measurement; off: voltage measurement

Current or voltage modules can be attached over different clamps. The current supply of the sensors can take place depending upon position of a slide switch from AS-i or from external voltage (after PELV). With the help of a 2. slide switch the 2. channel in favor of faster data communication can be switched off. The position of the slide switches is indicated over LEDs.

Supplying external loads:

- by supply out of AS-i: 50 mA max.
- y external supply: 500 mA max. (750 mA fuse)

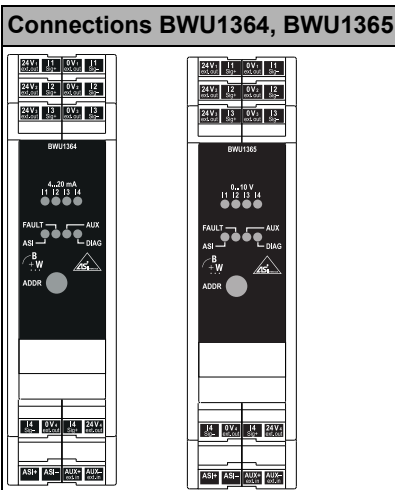


**LEDs BWU1364, BWU1365**

PWR (green)	AS-i voltage
FAULT (red)	AS-i communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
DIAG (green)	Diagnosis
I1 ... I4 (yellow)	State of channel I1, I2, I3, I4

The current supply of the sensors can be made out of AS-i or an external voltage supply (according to PELV). The current supply switches automatically to the supply out of external voltage supply, as soon as an external voltage is connected. The analog sensors and AS-i are galvanically separated.

## Connections BWU1366, BWU1367

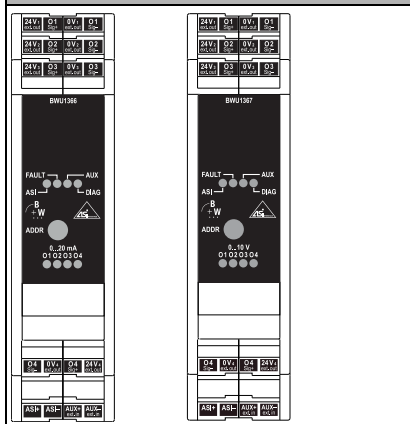


## LEDs BWU1366, BWU1367

PWR (green)	AS-i voltage
FAULT (red)	AS-i communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
DIAG (green)	Diagnosis
O1 ... O4 (yellow)	State of channel O1, O2, O3, O4

The current supply of the actuators can be made out of AS-i or an external voltage supply (according to PELV). The current supply switches automatically to the supply out of external voltage supply, as soon as an external voltage is connected. The actuators and AS-i are galvanically separated.

## Connections BWU1368

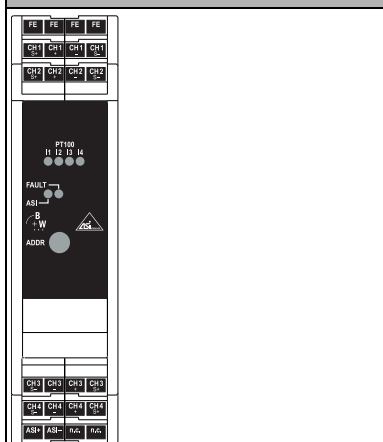


## LEDs BWU1368

PWR (green)	AS-i voltage
FAULT (red)	AS-i communication error, peripheral fault
I1 ... I4 (yellow)	State of channel I1, I2, I3, I4

The measuring sensors and AS-i are galvanically separated.

## Connections BWU1412, BWU1727, BWU1897

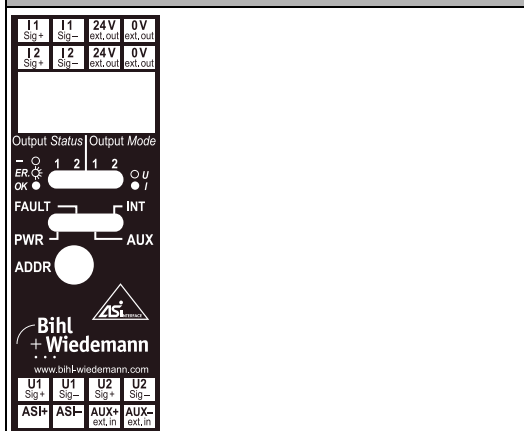

## LEDs BWU1412, BWU1727, BWU1897

PWR (green)	AS-i voltage
FAULT (red)	AS-i communication error, peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
INT (green)	Voltage supply for the analog part out of AS-i
Analog 1 (green)	State of channel 1
Analog 2 (green)	State of channel 2
Analog 1 (green)	Channel 1: on: current measurement; off: voltage measurement
Analog 2 (green)	Channel 2: on: current measurement; off: voltage measurement

Current or voltage modules can be attached over different clamps. The current supply of the actuators can take place depending upon position of a slide switch from AS-i or from external voltage (after PELV). The position of the slide switch is indicated over LEDs.

BWU1897: With the help of a 2. slide switch the 2. channel in favor of faster data communication can be switched off.

**Connections BWU1933, BWU2243**

FE FE FE FE  
TC1+ PT1+ PT1- TC1-  
TC2+ PT2+ PT2- TC2-  
Input  
- 1 2 3 4  
OK  
Pwr Fault  
Addr  
Bihl + Wiedemann  
www.bihl-wiedemann.com  
TC3- PT3- PT3+ TC3+  
TC4- PT4- PT4+ TC4+  
ASI+ ASI- NC NC

**Terminal connections BWU1933, BWU2243**

FE	Functional earth
TCx±	Thermo element +/- (inputs 1 - 4)
PTx±	PT100 +/- (External cold junction compensation)
AS-i±	AS-Interface +/-
n.c.	Not connected

The inputs ch. 2, ch. 3 and ch 4 are connected with a bridge and a resistor (in default state) to become a valid input value and to avoid peripheral faults.  
This can also be obtained by setting the parameter P1 and P2.  
The temperature is measured using cold junction temperature compensation. The analog sensors are galvanical separated to AS-i. For internal compensation the peripheral fault can be caused by a broken wire of the thermocouple. For the external compensation (Pt100 in connectors 2 and 3) the peripheral fault can also be caused by a broken wire or a short circuit of the Pt100 element. A short circuit of the TC cannot be recognized as an error.  
**Note:**  
Precise cold junction compensation requires vertical mounting and natural air circulation. A clearance of at least 5 cm each side is required!

**LEDs BWU1933, BWU2243**

PWR (green)	AS-i voltage
FAULT (red)	AS-i communication error, peripheral fault
In1 ... In4 (yellow)	State of channel I1, I2, I3, I4

**Connections BWU2224**

nc nc 24V 0V  
ext.in ext.out  
nc nc 24V 0V  
ext.in ext.out  
Output Status  
- 1 2  
ER CE OK  
FAULT FAULT AUX  
PWR  
ADDR  
Bihl + Wiedemann  
www.bihl-wiedemann.com  
U1 U1 U2 U2  
Sig+ Sig- Sig+ Sig-  
ASI+ ASI- AUX+ AUX-  
EMV III EMV III

**LEDs BWU2224**

PWR (green)	AS-i voltage
FAULT (red)	On: AS-i communication error; flashing: peripheral fault
AUX (green)	Voltage supply 24 V for the analog part
1 (yellow)	State of channel 1
2 (yellow)	State of channel 2

U1 Sig.- and U2 Sig.- connected.

The outputs are short circuit. The output channels have a common reference potential. The actuators are controlled from separate 24 V and they are galvanically isolated from AS-i and AUX.