



HF-Performer III for TL5 lamps

HF-P 254/255 TL5 HO/PLL III 220-240V IDC

HF-Performer III TL5 ballasts offer maximum versatility and meet all of the necessary commercial grade specifications. They also offer the added benefits of lamp striation reduction technology, making these ballasts compatible with energy-saving TL5 ECO lamps. As such, these ballasts are part of an overall high-efficiency lighting system that may help you or your customers to achieve any international or local energy code you need to comply with. HF-Performer III TL5 ballasts are the ideal choice for a broad range of new construction and retrofit applications within the commercial sector, including general surface mounting or office lighting, parking garages, warehouses, waterproof and other applications.

Product data

• General Information

Application Code	III
Type Version	IDC
Lamp Type	TL5 HO/PL-L
Number Of Lamps	2 piece/unit
Number Of Products	12
On MCB (16A Type B) (Nom)	
Automatic Restart	Yes

• Operating and Electrical

Input Voltage	220 to 240 V
Input Frequency	50/60 Hz
Operating Frequency (Nom)	46 kHz
Ignition Method	Programmed Start
Crestfactor (Max)	1.7
Power Factor 100%	0.99
Load (Nom)	
Ignition Time (Max)	0.9 s
Mains Voltage	-8%/+6%
Performance (AC)	
Mains Voltage Safety (AC)	-10%/+10%
Earth Leakage Current (Nom)	0.5 mA
Inrush Current	0.35 ms
Width	
Constant Wattage Deviation	-2%/+2%
Ballast Factor (Nom)	0.925

Power Losses (Nom)	8-7 W
Inrush Current Peak (Max)	31 A

• Wiring

Connector Type	WAGO 251 universal connector
Input Terminals	[Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Cable Capacity	200 pF
Output Wires Mutual (Nom)	
Connector Type	WAGO 251 universal connector
Output Terminals	[Suitable for both automatic wiring (ALF and ADS) and manual wiring]
Cable Length Hot Wiring	0.75 m
Wire Striplength	8.0-9.0 mm
Dual Fixture Master/Slave	Not applicable [Master/Slave oper. not applicable]
Input Terminal Cross Section	0.50-1.00 mm ²
Output Terminal Cross Section	0.50-1.00 mm ²
Cable Capacity	200 pF
Output Wires To Earth (Nom)	

• System characteristics

Rated Ballast-Lamp Power	54/55 W
--------------------------	---------

PHILIPS

HF-Performer III for TL5 lamps

Rated Lamp Power On PL-L	54-55 W
System Power On PL-L	111 W
Lamp Power On PL-L	104 W
Power Loss On PL-L	7 W
Rated Lamp Power On TL5	54-55 W
System Power On TL5	120 W
Lamp Power On TL5	112 W
Power Loss On TL5	8 W
Rated Lamp Power On TL5 ECO	50 W
System Power On TL5 ECO	106 W
Lamp Power On TL5 ECO	98 W
Power Loss On TL5 ECO	8 W

• Temperature

T-Ambient (Max)	60 °C
T-Ambient (Min)	-25 °C
T-Storage (Max)	80 °C
T-Storage (Min)	-40 °C
T-Case Lifetime (Nom)	80 °C
T-Case Maximum (Max)	80 °C
T-Ignition (Max)	60 °C
T-Ignition (Min)	-25 °C

• Mechanical and Housing

Housing	L360x30x22
---------	------------

• Emergency Operation

Nominal Light Output After 60 Seconds	100% of EBLF
Battery Voltage Lamp Ignition	198-254 V
Normal Operating Voltage (DC)	220-240 V
Battery Voltage Lamp Operation	176-254 V
Battery Voltage Guaranteed Operation	176-275 V

Battery Voltage	186-275 V
Guaranteed Ignition	
Emergency Ballast Lumen Factor (EBLF) (Nom)	0.7 %
Nominal Light Output After 5 Seconds	50% of EBLF

• Approval and Application


Energy Efficiency Index	A2 BAT
EMI 9 kHz ... 30 MHz	EN55015
EMI 30 MHz ... 1000MHz	Not specified
Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929
Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001
Harmonic Current Emission Standard	IEC 61000-3-2
Emc Immunity Standard	IEC 61547
Vibration Standard	IEC 68-2-6 Fc
Bumps Standard	IEC 68-2-29 Eb
Humidity Standard	EN 61347-2-3 clause 11
Temperature Marking	Yes
Emergency Standard	IEC 60598-2-22
Hum And Noise Level	<lt/> 30 dB(A)

• Product Data

Full product code	872790086351200
Order product name	HF-P 254/255 TL5 HO/PLL III 220-240V IDC
EAN/UPC - Product	8711500998224
Order code	913713028366
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913713028366
Net Weight (Piece)	0.280 kg


HF-Performer III for TL5 lamps

Dimensional drawing

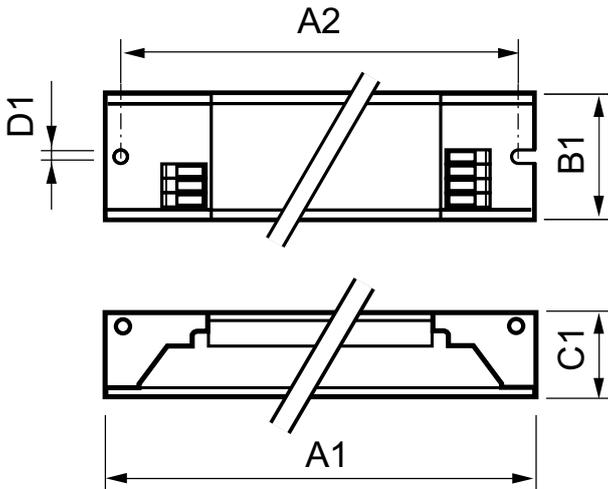

HF-P 254/255 TL5 HO/PL-L III IDC

Product	D1	C1	A1	A2	B1
HF-P 254/255 TL5 HO/PLL III 220-240V IDC	4.2 mm	22.0 mm	360.0 mm	350.0 mm	30.0 mm

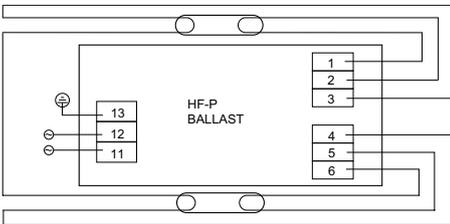

HF-P 2 TL-D/TL5 (keep wires 1;2 & 5;6 short)

Photometric data

Ballast type	Lamp type	Lamp power	T _a				
			40°C	50°C	60°C	70°C	
HF-P 254/255 TL5 HO/PL-L III 220-240V 50/60Hz	TL5 HO PL-L	54W 52W	T _e	159°C 100,000 Hrs	169°C 100,000 Hrs	177°C 60,000 Hrs	191°C 53,000 Hrs



© 2015 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 23
data subject to change