

MOSFETs

Order code	Manufacturer code	Description
47-0166	n/a	ZVN4306A N CHANNEL MOSFET (RC)

MOSFETs

Page 1 of 4

The enclosed information is believed to be correct. Information may change without notice due to product improvement. Users should ensure that the product is suitable for their use. E. & O. E.

Revision A
20/02/2007

**N-CHANNEL ENHANCEMENT
MODE VERTICAL DMOS FET**

ISSUE 3 - JULY 94


FEATURES

- * 60 Volt V_{DS}
- * $R_{DS(on)} = 0.33\Omega$
- * Spice model available

APPLICATIONS

- * DC-DC converters
- * Solenoids / relay drivers for automotive

ZVN4306A

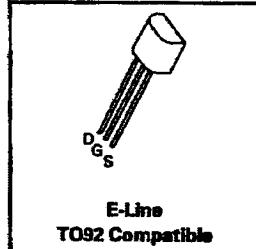

ABSOLUTE MAXIMUM RATINGS.

PARAMETER	SYMBOL	VALUE	UNIT
Drain-Source Voltage	V_{DS}	60	V
Continuous Drain Current at $T_{amb}=25^\circ C$	I_D	1.1	A
Practical Continuous Drain Current at $T_{amb}=25^\circ C$	I_{DP}	1.3	A
Pulsed Drain Current	I_{DM}	15	A
Gate Source Voltage	V_{GS}	± 20	V
Power Dissipation at $T_{amb}=25^\circ C$	P_{tot}	850	mW
Practical Power Dissipation at $T_{amb}=25^\circ C^*$	P_{totp}	1.13	W
Operating and Storage Temperature Range	T_f-T_{stg}	-55 to +150	$^\circ C$

*The power which can be dissipated assuming the device is mounted in a typical manner on a P.C.B. with copper equal to 1 inch square minimum

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Drain-Source Breakdown Voltage	$8V_{DSS}$	60			V	$I_D=1mA, V_{GS}=0V$
Gate-Source Threshold Voltage	$V_{GS(th)}$	1.3		3	V	$I_D=1mA, V_{DS}=V_{GS}$
Gate-Body Leakage	I_{GSS}			100	nA	$V_{GS}=\pm 20V, V_{DS}=0V$
Zero Gate Voltage Drain Current	I_{DSS}			10 100	μA	$V_{DS}=60V, V_{GS}=0$ $V_{DS}=48V, V_{GS}=0V, T=125^\circ C(2)$
On-State Drain Current(1)	$I_{D(on)}$	12			A	$V_{DS}=10V, V_{GS}=10V$
Static Drain-Source On-State Resistance (1)	$R_{DS(on)}$		0.22 0.32	0.33 0.45	Ω	$V_{GS}=10V, I_D=3A$ $V_{GS}=5V, I_D=1.5A$
Forward Transconductance (1)(2)	g_{fs}	700			mS	$V_{DS}=25V, I_D=3A$

ZVN4306A

ELECTRICAL CHARACTERISTICS (at $T_{amb} = 25^\circ C$ unless otherwise stated).

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITIONS.
Input Capacitance (2)	C_{iss}			350	pF	$V_{DS}=25\text{ V}, V_{GS}=0\text{V}, f=1\text{MHz}$
Common Source Output Capacitance (2)	C_{oss}			140	pF	
Reverse Transfer Capacitance (2)	C_{rss}			30	pF	
Turn-On Delay Time (2)(3)	$t_{d(on)}$			8	ns	$V_{DD}=25\text{V}, V_{GEN}=10\text{V}, I_D=3\text{A}$
Rise Time (2)(3)	t_r			25	ns	
Turn-Off Delay Time (2)(3)	$t_{d(off)}$			30	ns	
Fall Time (2)(3)	t_f			16	ns	


(1) Measured under pulsed conditions. Width=300μs. Duty cycle ≤2%

(2) Sample test.

(3) Switching times measured with 50Ω source impedance and <5ns rise time on a pulse generator

THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	MAX.	UNIT
Thermal Resistance: Junction to Ambient Junction to Case	$R_{th(j-amb)}$ $R_{th(j-case)}$	150 50	°C/W

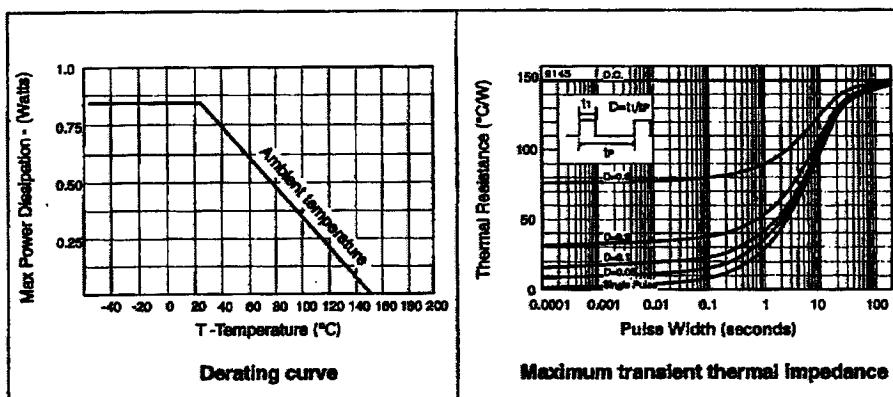

ZVN4306A

TYPICAL CHARACTERISTICS

