

Contactor AC3: 90 kW / 400 V 3-pole Size S6 Coil AC 50/60Hz and DC 96...127 V x (0,8...1,1) auxiliary contacts: 2 NO + 2 NC Main: busbar connections coil and auxilliary: screw circuit: screw terminal



Figure similar

| | |
|---|-----------------|
| Product brand name | SIRIUS |
| Product designation | Power contactor |
| Product type designation | 3RT1 |
| General technical data | |
| Size of contactor | S6 |
| Product extension | |
| • function module for communication | No |
| • Auxiliary switch | Yes |
| Insulation voltage | |
| • rated value | 1 000 V |
| Degree of pollution | 3 |
| Surge voltage resistance rated value | 8 kV |
| maximum permissible voltage for safe isolation | |
| • between coil and main contacts acc. to EN 60947-1 | 690 V |
| Protection class IP | |
| • on the front | IP00 |

| | |
|---|----------------------------|
| • of the terminal | IP00 |
| Shock resistance at rectangular impulse | |
| • at AC | 8,5g / 5 ms, 4,2g / 10 ms |
| • at DC | 8,5g / 5 ms, 4,2g / 10 ms |
| Shock resistance with sine pulse | |
| • at AC | 13,4g / 5 ms, 6,5g / 10 ms |
| • at DC | 13,4g / 5 ms, 6,5g / 10 ms |
| Mechanical service life (switching cycles) | |
| • of contactor typical | 10 000 000 |
| • of the contactor with added electronics-compatible auxiliary switch block typical | 5 000 000 |
| • of the contactor with added auxiliary switch block typical | 10 000 000 |

Ambient conditions

| | |
|--|----------------|
| Installation altitude at height above sea level | |
| • maximum | 2 000 m |
| Ambient temperature | |
| • during operation | -25 ... +60 °C |
| • during storage | -55 ... +80 °C |

Main circuit

| | |
|---|---------|
| Number of poles for main current circuit | 3 |
| Number of NO contacts for main contacts | 3 |
| Operating voltage | |
| • at AC-3 rated value maximum | 1 000 V |
| Operating current | |
| • at AC-1 at 400 V | |
| — at ambient temperature 40 °C rated value | 215 A |
| • at AC-1 | |
| — up to 690 V at ambient temperature 40 °C rated value | 215 A |
| — up to 690 V at ambient temperature 60 °C rated value | 185 A |
| — up to 1000 V at ambient temperature 40 °C rated value | 100 A |
| — up to 1000 V at ambient temperature 60 °C rated value | 100 A |
| • at AC-2 at 400 V rated value | 185 A |
| • at AC-3 | |
| — at 400 V rated value | 185 A |
| — at 500 V rated value | 185 A |
| — at 690 V rated value | 170 A |
| — at 1000 V rated value | 65 A |

| | |
|--|---|
| Connectable conductor cross-section in main circuit at AC-1 | |
| <ul style="list-style-type: none"> • at 60 °C minimum permissible • at 40 °C minimum permissible | <p>95 mm²</p> <p>95 mm²</p> |
| Operating current for approx. 200000 operating cycles at AC-4 | |
| <ul style="list-style-type: none"> • at 400 V rated value • at 690 V rated value | <p>81 A</p> <p>65 A</p> |
| Operating current | |
| <ul style="list-style-type: none"> • at 1 current path at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-1 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value | <p>160 A</p> <p>18 A</p> <p>3.4 A</p> <p>0.8 A</p> <p>0.5 A</p> <p>160 A</p> <p>160 A</p> <p>20 A</p> <p>3.2 A</p> <p>1.6 A</p> <p>160 A</p> <p>160 A</p> <p>160 A</p> <p>11.5 A</p> <p>4 A</p> |
| Operating current | |
| <ul style="list-style-type: none"> • at 1 current path at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 2 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value — at 110 V rated value — at 220 V rated value — at 440 V rated value — at 600 V rated value • with 3 current paths in series at DC-3 at DC-5 <ul style="list-style-type: none"> — at 24 V rated value | <p>160 A</p> <p>2.5 A</p> <p>0.6 A</p> <p>0.17 A</p> <p>0.12 A</p> <p>160 A</p> <p>160 A</p> <p>2.5 A</p> <p>0.65 A</p> <p>0.37 A</p> <p>160 A</p> |

| | |
|---|--------------|
| — at 110 V rated value | 160 A |
| — at 220 V rated value | 160 A |
| — at 440 V rated value | 1.4 A |
| — at 600 V rated value | 0.75 A |
| Operating power | |
| • at AC-1 | |
| — at 230 V at 60 °C rated value | 70 kW |
| — at 400 V rated value | 121 kW |
| — at 400 V at 60 °C rated value | 121 kW |
| — at 690 V rated value | 215 kW |
| — at 690 V at 60 °C rated value | 210 kW |
| — at 1000 V at 60 °C rated value | 165 kW |
| • at AC-2 at 400 V rated value | 90 kW |
| • at AC-3 | |
| — at 230 V rated value | 61 kW |
| — at 400 V rated value | 90 kW |
| — at 500 V rated value | 132 kW |
| — at 690 V rated value | 160 kW |
| — at 1000 V rated value | 90 kW |
| Operating power for approx. 200000 operating cycles at AC-4 | |
| • at 400 V rated value | 45 kW |
| • at 690 V rated value | 65 kW |
| Thermal short-time current limited to 10 s | 1 480 A |
| Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor | 13 W |
| No-load switching frequency | |
| • at DC | 1 000 1/h |
| Operating frequency | |
| • at AC-1 maximum | 800 1/h |
| • at AC-2 maximum | 300 1/h |
| • at AC-3 maximum | 750 1/h |
| • at AC-4 maximum | 130 1/h |
| Control circuit/ Control | |
| Type of voltage of the control supply voltage | AC/DC |
| Control supply voltage at AC | |
| • at 50 Hz rated value | 96 ... 127 V |
| • at 60 Hz rated value | 96 ... 127 V |
| Control supply voltage at DC | |
| • rated value | 96 ... 127 V |
| Operating range factor control supply voltage rated value of magnet coil at DC | |

| | |
|---|--------------------------------|
| <ul style="list-style-type: none"> • initial value | 0.8 |
| <ul style="list-style-type: none"> • Full-scale value | 1.1 |
| Operating range factor control supply voltage rated value of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz | 0.8 ... 1.1 |
| <ul style="list-style-type: none"> • at 60 Hz | 0.8 ... 1.1 |
| Design of the surge suppressor | with varistor |
| Apparent pick-up power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz | 280 V·A |
| Inductive power factor with closing power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz | 0.8 |
| Apparent holding power of magnet coil at AC | |
| <ul style="list-style-type: none"> • at 50 Hz | 4.4 V·A |
| Inductive power factor with the holding power of the coil | |
| <ul style="list-style-type: none"> • at 50 Hz | 0.5 |
| Closing power of magnet coil at DC | 320 W |
| Holding power of magnet coil at DC | 2.8 W |
| Closing delay | |
| <ul style="list-style-type: none"> • at AC | 60 ... 75 ms |
| <ul style="list-style-type: none"> • at DC | 60 ... 75 ms |
| Opening delay | |
| <ul style="list-style-type: none"> • at AC | 115 ... 130 ms |
| <ul style="list-style-type: none"> • at DC | 115 ... 130 ms |
| Recovery time after power failure typical | 2 s |
| Arcing time | 10 ... 15 ms |
| Control version of the switch operating mechanism | Fail-safe PLC input (F-PLC-IN) |

Auxiliary circuit

| | |
|--|--------------------------|
| Number of NC contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts — instantaneous contact | 2 |
| Number of NO contacts | |
| <ul style="list-style-type: none"> • for auxiliary contacts — instantaneous contact | 2 |
| Operating current at AC-12 maximum | 10 A |
| Operating current at AC-15 | |
| <ul style="list-style-type: none"> • at 230 V rated value • at 400 V rated value • at 500 V rated value • at 690 V rated value | 6 A 3 A 2 A 1 A |
| Operating current at DC-12 | |
| <ul style="list-style-type: none"> • at 24 V rated value | 10 A |

| | |
|---|---|
| <ul style="list-style-type: none"> • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | <p>6 A</p> <p>6 A</p> <p>3 A</p> <p>2 A</p> <p>1 A</p> <p>0.15 A</p> |
| Operating current at DC-13 <ul style="list-style-type: none"> • at 24 V rated value • at 48 V rated value • at 60 V rated value • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value | <p>10 A</p> <p>2 A</p> <p>2 A</p> <p>1 A</p> <p>0.9 A</p> <p>0.3 A</p> <p>0.1 A</p> |
| Contact reliability of auxiliary contacts | <p>1 faulty switching per 100 million (17 V, 1 mA)</p> |

UL/CSA ratings

| | |
|--|--|
| Full-load current (FLA) for three-phase AC motor <ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value | <p>180 A</p> <p>192 A</p> |
| Yielded mechanical performance [hp] <ul style="list-style-type: none"> • for single-phase AC motor <ul style="list-style-type: none"> — at 230 V rated value • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value | <p>30 hp</p> <p>60 hp</p> <p>75 hp</p> <p>150 hp</p> <p>200 hp</p> |
| Contact rating of auxiliary contacts according to UL | <p>A600 / P600</p> |

Short-circuit protection

| | |
|--|--|
| Design of the fuse link <ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required | <p>Fuse gG: 355 A</p> <p>Fuse gG: 315 A</p> <p>fuse gG: 10 A</p> |
|--|--|

Installation/ mounting/ dimensions

| | |
|--|---|
| Mounting position | <p>+/-180° rotation possible on vertical mounting surface; can be tilted forward and backward by +/- 22.5° on vertical mounting surface</p> |
| Mounting type <ul style="list-style-type: none"> • Side-by-side mounting | <p>screw fixing</p> <p>Yes</p> |

| | |
|--------|--------|
| Height | 172 mm |
| Width | 120 mm |
| Depth | 170 mm |

Connections/Terminals

| | |
|---|---|
| Type of electrical connection | |
| <ul style="list-style-type: none"> • for main current circuit • for auxiliary and control current circuit | <p>screw-type terminals</p> <p>screw-type terminals</p> |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • at AWG conductors for main contacts | 2x 1/0 |
| Type of connectable conductor cross-sections | |
| <ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — single or multi-stranded — finely stranded with core end processing • at AWG conductors for auxiliary contacts | <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)</p> <p>2x (0,5 ... 1,5 mm²), 2x (0,75 ... 2,5 mm²), max. 2x (0,75 ... 4 mm²)</p> <p>2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)</p> <p>2x (20 ... 16), 2x (18 ... 14), 1x 12</p> |

Safety related data

| | |
|---|--|
| Safety device type acc. to IEC 61508-2 | Type B |
| B10 value | |
| <ul style="list-style-type: none"> • with high demand rate acc. to SN 31920 | 1 000 000 |
| Safety Integrity Level (SIL) acc. to IEC 61508 | 2 |
| SIL Claim Limit (subsystem) acc. to EN 62061 | 2 |
| Performance level (PL) acc. to EN ISO 13849-1 | c |
| Category acc. to EN ISO 13849-1 | 2 |
| Stop category acc. to DIN EN 60204-1 | 0 |
| Proportion of dangerous failures | |
| <ul style="list-style-type: none"> • with low demand rate acc. to SN 31920 • with high demand rate acc. to SN 31920 | <p>40 %</p> <p>73 %</p> |
| Product function | |
| <ul style="list-style-type: none"> • Mirror contact acc. to IEC 60947-4-1 • positively driven operation acc. to IEC 60947-5-1 | <p>Yes</p> <p>No</p> |
| PFHD with high demand rate acc. to EN 62061 | 0.00000045 1/h |
| PFDavg with low demand rate acc. to IEC 61508 | 0.007 |
| MTBF | 75 y |
| Hardware fault tolerance acc. to IEC 61508 | 0 |
| T1 value for proof test interval or service life acc. to IEC 61508 | 20 y |
| Protection against electrical shock | finger-safe when touched vertically from front acc. to IEC 60529 |

Certificates/approvals

| | | | |
|--------------------------|---------------------------------------|---------------------------|-------------------|
| General Product Approval | Functional Safety/Safety of Machinery | Declaration of Conformity | Test Certificates |
|--------------------------|---------------------------------------|---------------------------|-------------------|



[Type Examination Certificate](#)



[Special Test Certificate](#)

| | |
|-------------------|-------|
| Marine / Shipping | other |
|-------------------|-------|



[Confirmation](#)

[Miscellaneous](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RT1056-6SF36>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RT1056-6SF36>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RT1056-6SF36>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RT1056-6SF36&lang=en

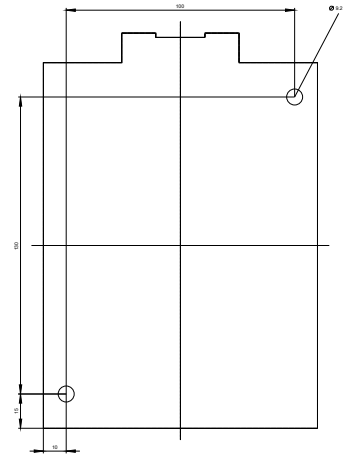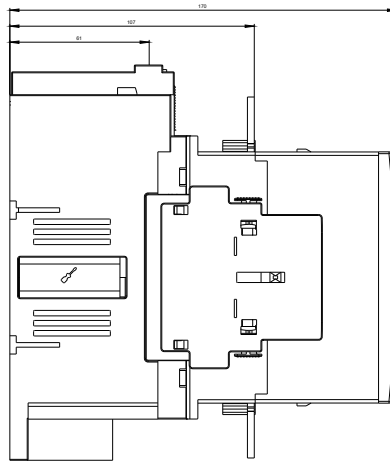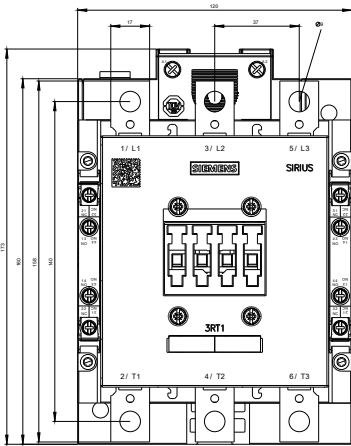

last modified:

10/13/2017