

CIRCUIT BREAKER 230/400V 10KA, 1-POLE, D, 6A,  
D=70MM



Figure similar

Model		
product brand name		SENTRON
Product designation		5SY miniature circuit breaker
<b>Design of the product</b>		5SY miniature circuit breakers

General technical data		
<b>Number of poles</b>		1
<b>Number of poles / Note</b>		1P
<b>Tripping characteristic class</b>		D
<b>circuit-breaker / Design</b>		5SY4
<b>Mechanical service life (switching cycles) / typical</b>		20 000
<b>Overvoltage category</b>		3

Voltage		
<b>Insulation voltage</b>		
<ul style="list-style-type: none"> <li>with single-phase operation / with AC / Rated value</li> </ul>	V	250
<ul style="list-style-type: none"> <li>with multi-phase operation / with AC / Rated value</li> </ul>	V	440

Supply voltage		
Supply voltage frequency / Rated value	Hz	50

Protection class		
<b>Protection class IP</b>		IP20, with connected conductors
<b>Energy limiting class</b>		3

### Switching capacity

<b>Switching capacity current</b>		
• for DC / acc. to IEC 60947-2 / Rated value	kA	15
• acc. to EN 60898 / Rated value	kA	10
• acc. to IEC 60947-2 / Rated value	kA	35
<b>Dissipation</b>		
<b>Active power loss</b>		
• for rated value of the current / with AC / in hot operating state / per pole	W	1.6
<b>Electricity</b>		
rated current I <sub>n</sub> / IEC, DIN/VDE / at 40 Cel	A	5.64
Current / with AC / Rated value	A	6
<b>Product details</b>		
Product feature / Touch protection		Yes
<b>Product component</b>		
• combined terminal top		Yes
• combined terminal bottom		Yes
<b>Product property</b>		
• Properties for main switches in accordance with EN 60204-1		Yes
• halogen-free		Yes
• sealable		Yes
• silicon-free		Yes
Product expansion / can be installed / supplementary devices		Yes
<b>Product function</b>		
Product function / neutral conductor switching		No
<b>Short circuit</b>		
<b>Breaking capacity short-circuit current (I<sub>cn</sub>)</b>		
• with AC / acc. to UL 1077 and CSA C22.2 No.235	kA	5
• for DC / acc. to EN 60898-2	kA	10
<b>Number</b>		
Number of test cycles / for environmental testing / acc. to IEC 60068-2-30		6
<b>Connections</b>		
<b>Connectable conductor cross-section / stranded</b>		
• minimum	mm <sup>2</sup>	0.75
• maximum	mm <sup>2</sup>	35
<b>Connectable conductor cross-section</b>		
• solid		

— minimum	mm <sup>2</sup>	0.75
— maximum	mm <sup>2</sup>	35
• finely stranded / with core end processing		
— minimum	mm <sup>2</sup>	0.75
— maximum	mm <sup>2</sup>	25
<b>AWG number / as coded connectable conductor cross section</b>		
• minimum		14
• maximum		4
<b>Tightening torque [lbf-in] / with screw-type terminals</b>		
• minimum	lbf-in	22
• maximum	lbf-in	26
<b>Tightening torque / with screw-type terminals</b>		
• minimum	N·m	2.5
• maximum	N·m	3
Position / of power supply cord		Any

Mechanical Design		
Height	mm	90
Width	mm	18
Depth	mm	76
mounting position		any
Installation depth	mm	70
Number of width units		1
Mounting type		Quick assembly system

Environmental conditions		
Influence of the surrounding temperature		Max. 95% humidity
Shock resistance / acc. to IEC 60068-2-27		150m/s <sup>2</sup> at 11ms half-sine
Vibration resistance / acc. to IEC 60068-2-6		50m/s <sup>2</sup> at 25 to 150Hz and 60m/s <sup>2</sup> at 35Hz (4sec)
<b>Ambient temperature</b>		
• minimum	°C	-25
• maximum	°C	55
• during storage / minimum	°C	-40
• during storage / maximum	°C	75

Certificates		
Equipment marking / acc. to DIN EN 61346-2		F

## General Product Approval



CCC



IMQ



GOST



UL



VDE



Declaration of  
Conformity

Test Certificates

Shipping Approval



EG-Konf.

[Special Test  
Certificate](#)

[other](#)



DNV

Lloyd's  
Register

LRS

Shipping  
Approval

other



RINA

[other](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SY41068>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/5SY41068/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=5SY41068](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5SY41068)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://ausschreibungstexte.siemens.com/tiplv>

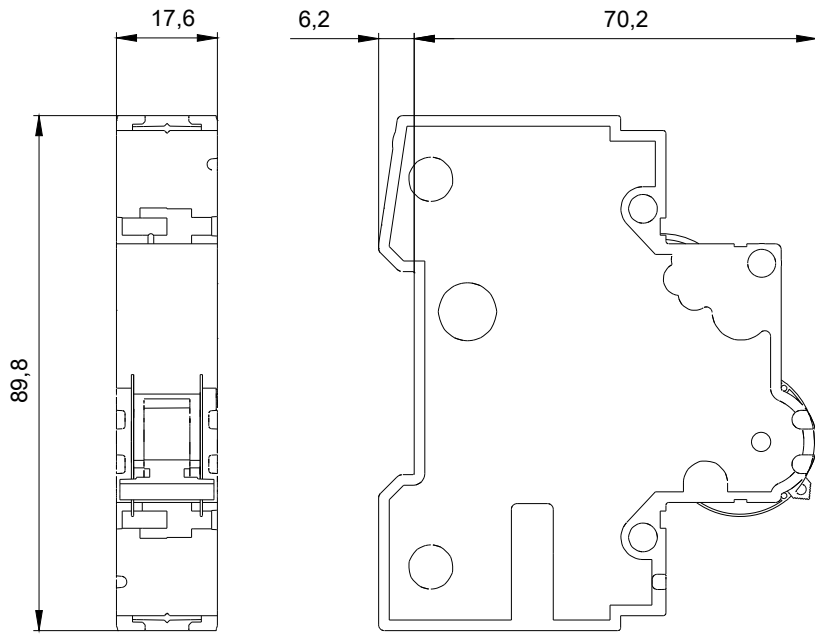

last modified:

11.03.2015