



YELLOW COVER FOR POSITION SWITCH PLASTIC  
3SE513, HOUSING TO EN50041

Product designation		Cover (plastic) for housing EN50041, yellow
<b>General technical data:</b>		
Degree of pollution		class 3
Shock resistance		30g / 11 ms
Vibration resistance		0.35 mm / 5g
Protection class IP		IP66/IP67
Explosion protection category for dust		none
Explosion protection category for gas		none
<b>Enclosure:</b>		
Design of the housing		block, narrow
Coating of the enclosure		Other types
<b>Drive Head:</b>		
Design of the operating mechanism		without
<b>Communication/ Protocol:</b>		
Design of the interface		without
<b>Ambient conditions:</b>		
Ambient temperature		
• during operation	°C	-25 ... +85
• during storage	°C	-40 ... +90
<b>Installation/ mounting/ dimensions:</b>		
mounting position		any
Mounting type		screw fixing
<b>Certificates/ approvals:</b>		

General Product Approval			Declaration of Conformity	other
 CCC	 CSA	 UL		 EG-Konf.
				<a href="#">Confirmation</a>

#### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SE51300AA001AG0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3SE51300AA001AG0/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3SE51300AA001AG0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SE51300AA001AG0&lang=en)

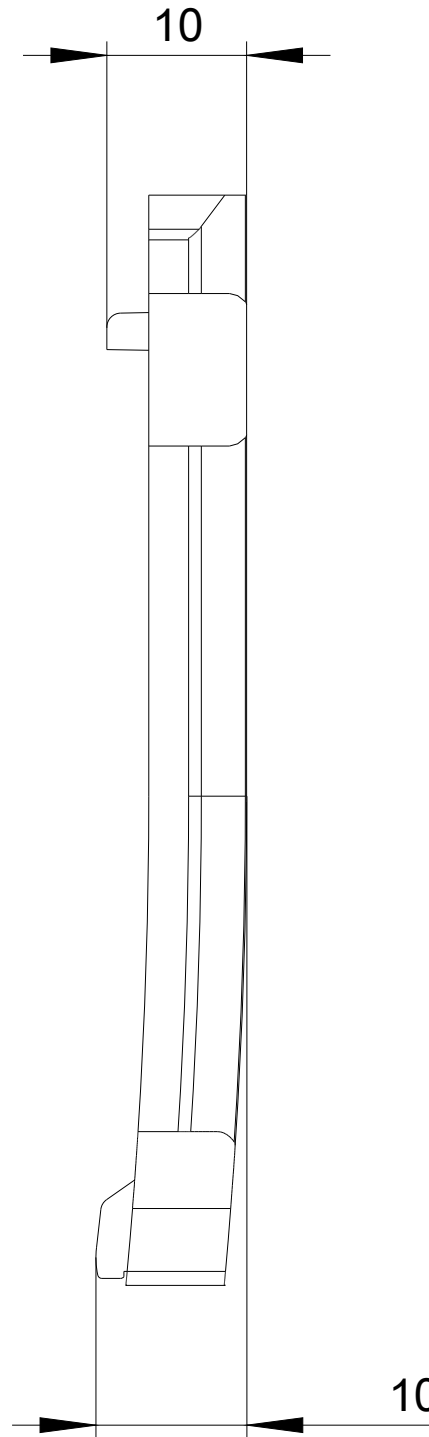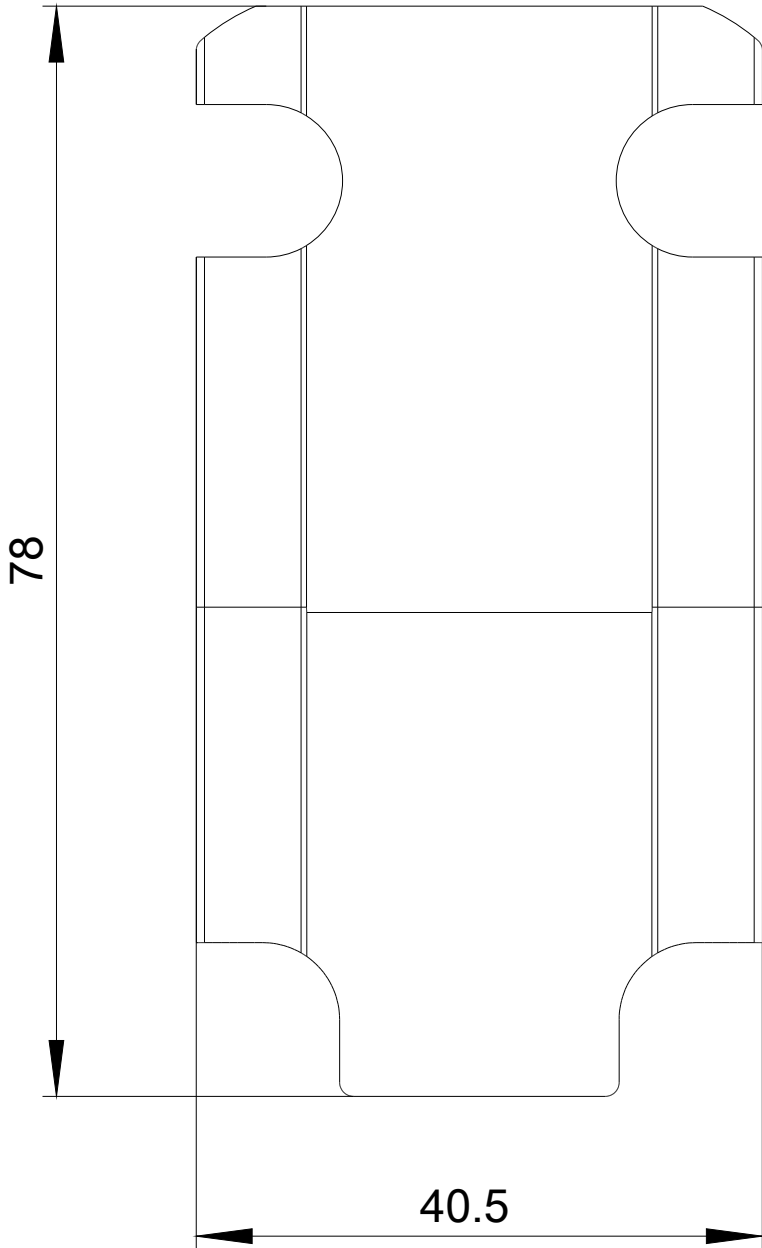

**last modified:**

16.03.2015