

Han K 32-55-F-C

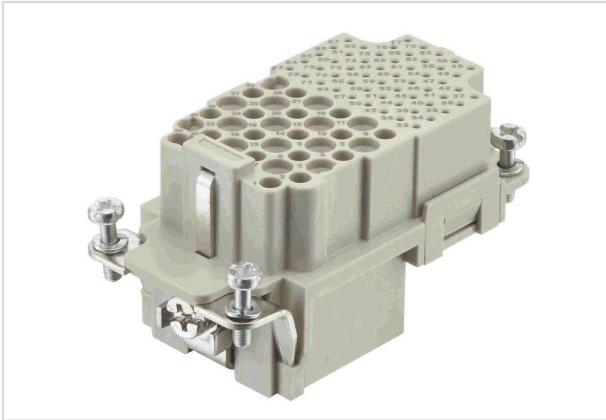


Image is for illustration purposes only. Please refer to product description.

Part number	09 38 087 3101
Specification	Han K 32-55-F-C
HARTING eCatalogue	https://b2b.harting.com/09380873101

Identification

Category	Inserts
Series	Han-Com [®]
Identification	Han [®] K 32/55

Version

Termination method	Crimp termination
Gender	Female
Size	10 B
Number of contacts	87
Number of signal contacts	55
Number of power contacts	32
PE contact	Yes
Details	Please order crimp contacts separately. 32x Han D [®] 55x D-Sub

Technical characteristics

Conductor cross-section	0.14 ... 2.5 mm ² Power 0.09 ... 0.52 mm ² Signal
Rated current (signal)	4 A
Rated voltage (signal)	50 V
Rated impulse voltage (signal)	0.8 kV
Pollution degree (signal)	2
Rated current (power)	10 A



Pushing Performance
Since 1945

Technical characteristics

Rated voltage (power)	250 V
Rated impulse voltage (power)	4 kV
Pollution degree (power)	2
Rated voltage acc. to UL	600 V Power contacts 30 V Signal contacts
Insulation resistance	$>10^{10} \Omega$
Limiting temperature	-40 ... +125 °C
Mating cycles	≥ 500

Material properties

Material (insert)	Polycarbonate (PC)
Colour (insert)	RAL 7032 (pebble grey)
Material flammability class acc. to UL 94	V-0
RoHS	compliant
ELV status	compliant
China RoHS	e
REACH Annex XVII substances	Not contained
REACH ANNEX XIV substances	Not contained
REACH SVHC substances	Not contained
California Proposition 65 substances	Yes
California Proposition 65 substances	Lead Nickel
Fire protection on railway vehicles	EN 45545-2 (2020-08)
Requirement set with Hazard Levels	R22 (HL 1-3) R23 (HL 1-3)

Specifications and approvals

Specifications	IEC 60664-1 IEC 61984
UL / CSA	UL 1977 ECBT2.E235076 CSA-C22.2 No. 182.3 ECBT8.E235076

Commercial data

Packaging size	1
Net weight	35 g
Country of origin	China



Pushing Performance
Since 1945

Commercial data

European customs tariff number	85366990
GTIN	5713140186507
ETIM	EC000438
eCl@ss	27440205 Contact insert for industrial connectors