



HF-Performer Intelligent for TL5 HE/HO lamps

HF-Performer Intelligent 2 28/35/49/54 TL5 220-240V

HF-Performer Intelligent for Master and ECO TL5 HE/HO, TL-D and PL-L lamps HF-Performer Intelligent features automatic recognition of the connected lamp and is independently able to adjust its operation parameters exactly to the respective lamp. This results in a substantial benefit, especially for T5 lamps, as it means TL5 HE and HO lamps of the same length can be interchanged. With a choice of seven ballasts, the customer is able to handle efficiently every possible combination of Master TL5 and Eco, TL-D, and PL-L lamps.

Product data

• General Characteristics

Application code	EII
Rated Lamptype	TL5
Rated Number of Lamps	2 piece
Rated Ballast-Lamp Power	28-54
Line Voltage	220-240 V
Line Frequency	50/60 Hz
Housing	L 360x30x22
Energy Efficiency Index	A2
Lifetime 90% surv.@Tcaselife	50000 hr
Ignition Method	Warm Start

• Operating Characteristics

Automatic restart	Yes
Ignition time	5.0 (max) s
Mains voltage safety (AC)	-10%/+10%
Mains voltage performance (AC)	-8%/+6%
Inrush current Peak	31 (max) A
Inrush current Width	0.35 ms
Earth leakage current	0.5 (max) mA
Power losses gear	6.1-8.9 W
Constant wattage deviation	-2%/+2%
Ballast Lumen Factor	1.00 -
Battery voltage running lamps	198-276
Max ballast on MCB(16A type B)	12 x
Crestfactor	1.7 (max) -
Hum and Noise level	Inaudible

• Wiring Characteristics

Cable-Cap output-wires to earth	70 pF
Cable-Cap output-wires mutual	70 pF
Conn.type input terminals	Insert
Conn.type output terminals	Insert
Max. cable length	0.75 m
Hot Wires	
Striplength	8.0-9.0 mm
Wcs Input terminals	0.50-1.00 mm ²
Wcs Output terminals	0.50-1.00 mm ²

• System Chars on driver level

Rated Lamp Power on TL5	28/35/49/54
System Power on TL5	33.6/41.1/53/53.2
Lamp Power on TL5	27.5/34.4/45.6/48.4
Power Loss on TL5	6.1/6.7/7.4/8

• Temperature Characteristics

T-case life	75 C
T-case maximum	75 (max) C
T-ignition	-25 (min), 50 (max) C
T-ambient	-25 (min), 50 (max) C
T-storage	-40 (min), 80 (max) C



asimpleswitch.com

PHILIPS

HF-Performer Intelligent for TL5 HE/HO lamps

• Product Dimensions

Length A1	360 mm
Fixing Hole Distance	350 mm
Length A2	
Width B1	30 mm
Height C1	22 mm
Fixing Hole Diameter	4.2 mm
D1	

• Approval & Application Chars


EMI 9kHz .. 30 MHz	EN 55015
EMI 30 MHz .. 1000MHz	EN 55022 Class B
Safety Standard	IEC 61347-2-3
Performance Standard	IEC 60929
Quality Standard	ISO 9000:2000
Environmental Standard	ISO 14001
Harmonic current emissions	IEC 61000-3-2
EMC Immunity	IEC 61547
Vibrations	IEC 68-2-6 Fc

Bumps	IEC 68-2-29 Eb
Humidity	EN 61347-2-3 clause 11
Approval marks	ENEC / VDE-EMV
CE marking	Yes
Temperature marking	110 [Yes]
Emergency standard	IEC 60598-2-22

• Product Data

Order code	913700624366
Full product code	913700624366
Full product name	HF-Pi 2 28/35/49/54 TL5 EII 220-240V
Order product name	HF-Pi 2 28/35/49/54 TL5 EII 220-240V
Pieces per pack	1
Packing configuration	12
Packs per outerbox	12
Bar code on pack - EAN1	8711500915023
Bar code on outerbox - EAN3	8711500915030
Logistic code(s) - 12NC	913700624366
Net weight per piece	0.305 kg

Dimensional drawing

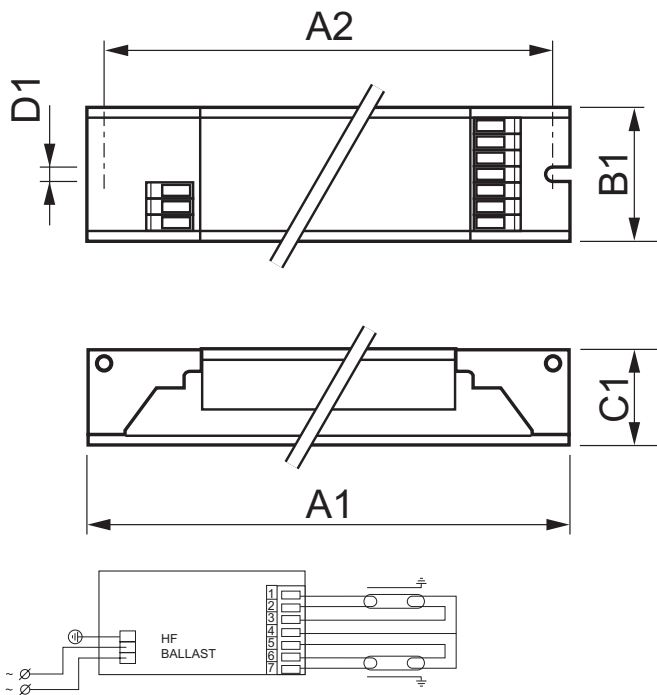

HF-Performer Intelligent 2 28/35/49/54 TL5 220-240V

Product	A1 (Norm)	A2 (Norm)	B1 (Norm)	C1 (Norm)	D1 (Norm)
HF-Pi 2 28/35/49/54 TL5 EII 220-240V	360	350	30	22	4.2

HF-Performer Intelligent for TL5 HE/HO lamps

Photometric data

Ballast type	Lamp type	Lamp power		T _a = 40°C	T _a = 50°C	T _a = 60°C	Remarks T _a max = 63°C	
HF-Pi 2 28/35/49/54 TL5 EII 220-240V	TL5 HE	28W	T _c Lifetime	=54°C	=63°C	=72°C	75°C	
	TL5 HE ECO	25W		100,000 Hrs	100,000 Hrs	100,000 Hrs	89,000 Hrs	
	TL5 HE ECO	32W						
		Lamp type	Lamp power		T _a = 40°C	T _a = 50°C	T _a = 60°C	Remarks T _a max = 54°C
		TL5 HE	35W					
		TL5 HO	49W					
		TL5 HO	54W					
		TL5 HO ECO	45W	T _c Lifetime	=62°C	=71°C	x	75°C
		TL5 HO ECO	50W		100,000 Hrs	100,000 Hrs	x	57,000 Hrs
		TL-D	58W					
	PL-L	55W						
	TL5-C	60W						



© 2014 Koninklijke Philips N.V. (Royal Philips)
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2014, August 22
data subject to change