



Corepro - LED HID HPL

TForce Core LED HPL 26W E27 840 FR

Philips TrueForce Core LED HPL lamps are an easy, LED solution with a short pay-back to replace High Intensity Discharge (HID) lamps. This new generation of LED Core Post-Top lamps brings all the energy-efficiency and long-lifetime benefits of LED to HID replacement, while delivering instant saving for a low initial investment. Furthermore, TrueForce CorePro LED HPL lamps are designed to have the same lamp size and light distribution as their HID alternatives. And thanks to our high-power LED filament technology, you'll never know the difference. Plus, their unique IP65 design means that TrueForce Core LED HPL Post-Top lamps can be used for outdoor, as well as indoor applications.

Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.

Product data


General Information		Color Designation	
Cap-Base	E27	Color Designation	Cool White (CW)
Nominal lifetime	25,000 hour(s)	Correlated Color Temperature (Nom)	4000 K
Switching Cycle	15,000	Luminous Efficacy (rated) (Nom)	153 lm/W
Lighting Technology	LED	Color Consistency	<6
Flux measurement reference	Sphere	Color rendering index (CRI)	80
CE mark	Yes	LLMF At End Of Nominal Lifetime (Nom)	0.7 %
EU RoHS compliant	Yes	Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
		Stroboscopic effect visibility measure (SVM)	1.6
		Photobiological safety according to EN 62471	RG1
Light Technical		Operating and Electrical	
Color Code	840 [CCT of 4000K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	300 degree(s)		
Luminous Flux	4,000 lm		

Corepro - LED HID HPL

Input Frequency	50 to 60 Hz
Power Consumption	26 W
Lamp Current (Nom)	145 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Inrush current at mains	29
Max. lamp no. on MCB B type 10A - Mains	6
Max. lamp no. on MCB B type 10A – EM ballast without Comp. Cap.	-
Max. lamp no. on MCB B type 10A – EM ballast with Comp. Cap.	-
Max. lamp no. on MCB B type 16A - Mains	9
Max. lamp no. on MCB B type 16A – EM ballast without Comp. Cap.	-
Max. lamp no. on MCB B type 16A – EM ballast with Comp. Cap.	-
Ballast Compatibility	Mains
Temperature	
Ambient temperature range	-30 to +45 °C
T-Case Maximum (Nom)	54 °C
Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	ED90
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	26 kWh
EPREL Registration Number	403623
Product Data	
Order product name	TForce Core LED HPL 26W E27 840 FR
Full product name	TForce Core LED HPL 26W E27 840 FR
Full product code	871869975035000
Order code	929002350202
Material Nr. (12NC)	929002350202
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699750350
Numerator - Packs per outer box	6
EAN/UPC - Case	8718699750367



Dimensional drawing



Product	D	C
TForce Core LED HPL 26W E27 840 FR	90 mm	245 mm


Corepro - LED HID HPL

Photometric data

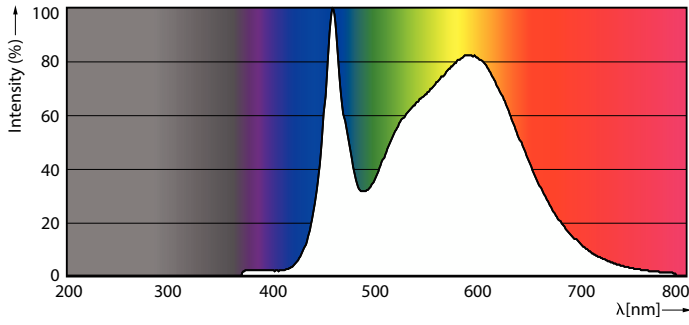

Spectral Power Distribution Colour - TForce Core LED HPL 26W E27 840 FR


Light Distribution Diagram - TForce Core LED HPL 26W E27 840 FR




General Information 11

General uniform lighting - TForce Core LED HPL 26W E27 840 FR

Lifetime

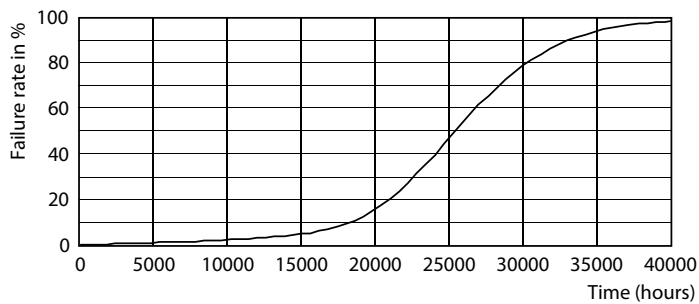

Life Expectancy Diagram - TForce Core LED HPL 26W E27 840 FR

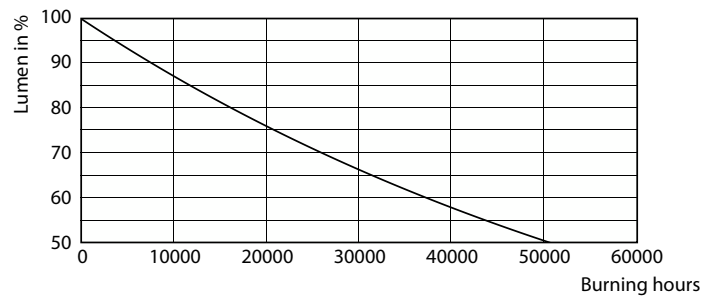

Lumen Maintenance Diagram - TForce Core LED HPL 26W E27 840 FR

Corepro - LED HID HPL

