

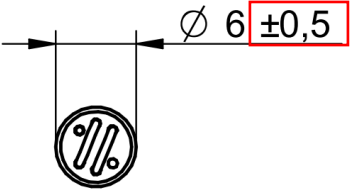
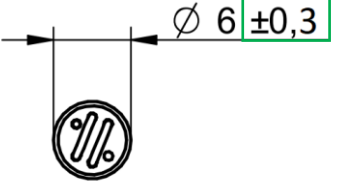
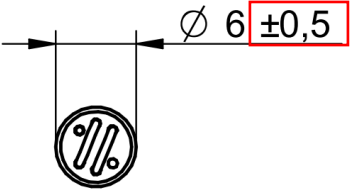
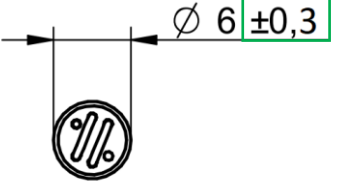


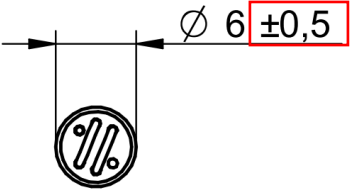

Product / Process Change Notification (PCN)							
<input type="checkbox"/> Major Change <input checked="" type="checkbox"/> Minor Change							
PCN Number: PCN_FeUKW_20240919 Affected Series: WE-UKW Affected Order Codes: 7427501, 74275010, 74275011, 74275013, 7427502, 74275022, 74275023, 7427503, 7427504, 742750421, 74275043, 74275046, 74275123, 74275143, 74275223, 74275243, 74275323 PCN Date: 2024-06-19 (YYYY-MM-DD) Effective Date: 2024-09-19 (YYYY-MM-DD)	Change Category: <input type="checkbox"/> Equipment/Location <input checked="" type="checkbox"/> General Data <input type="checkbox"/> Material <input type="checkbox"/> Process <input type="checkbox"/> Product Design <input type="checkbox"/> Shipping / Packaging <input type="checkbox"/> Supplier <input type="checkbox"/> Software						
Contact: Product Management Phone: +49 (0) 7942 - 945 5001 Fax: +49 (0) 7942 - 945 5179 E-Mail: pcn.eisos@we-online.com	Datasheet Change: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No Attachment: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No						
Description of Change: Due to internal standardisation, Würth Elektronik eiSos will extend the operating temperature and change the core thickness tolerance. There will be no change in form, fit, function, quality or reliability of the product.							
Details of Change: <table border="1"> <thead> <tr> <th style="color: red;">Before Change</th> <th style="color: green;">After Change</th> </tr> </thead> <tbody> <tr> <td> The tolerance of the core thickness will be $\pm 0,5$  </td> <td> The tolerance of the core thickness will be $\pm 0,3$  </td> </tr> <tr> <td> Operating Temperature: -25 °C up to +125 °C </td> <td> Operating Temperature: -55 °C up to +125 °C </td> </tr> </tbody> </table>		Before Change	After Change	The tolerance of the core thickness will be $\pm 0,5$ 	The tolerance of the core thickness will be $\pm 0,3$ 	Operating Temperature: -25 °C up to +125 °C	Operating Temperature: -55 °C up to +125 °C
Before Change	After Change						
The tolerance of the core thickness will be $\pm 0,5$ 	The tolerance of the core thickness will be $\pm 0,3$ 						
Operating Temperature: -25 °C up to +125 °C	Operating Temperature: -55 °C up to +125 °C						

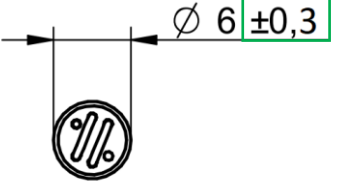

Reliability / Qualification of Change:

Product approval is according to the specification criteria and is internally released by the Product Management Department.

The following items are part of the internal release process:

Test Item	Sample Size	Reference	Test Conditions	Acceptance
Visual Appearance	10	Product specification	Room temperature	Approved
Mechanical Parameters	10	Product specification	Room temperature	Approved
Electrical Parameters	10	Product specification	Room temperature	Approved
Thermal Electrical Parameters	10	Product specification	-55 °C to 125 °C	Approved