#### DEUTSCH | DEUTSCH 38999 Series III Composite Connectors

TE Internal #: YACT26JE08BNV00100 Standard Circular Connectors, Cable-to-Panel, 8 Position, Sealable, Wire & Cable, Power, Panel Mount, DEUTSCH 38999 Series III Composite Connectors

View on TE.com >



Connectors > Circular Connectors > Standard Circular Connectors > Straight Plug D38999, E08 Insert



Connector System: Cable-to-Panel Number of Positions: 8 Sealable: Yes Connector & Contact Terminates To: Wire & Cable Contact Current Rating (Max): 13 A

All Straight Plug D38999, E08 Insert (76)

#### Features

#### Product Type Features

Product Type

#### Connector

Assembly Type	Electrical Connector
Connector System	Cable-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Plug
Shell Type	Straight Plug
Configuration Features	
Keying & Polarized Position Locations	Ν
Factory Installed Backshell	No
Keying	Key Polarization N
Number of Positions	8
Number of Power Positions	8
Number of Signal Positions	0
Contacts Preloaded	No
Electrical Characteristics	

Standard Circular Connectors, Cable-to-Panel, 8 Position, Sealable, Wire & Cable, Power, Panel Mount, DEUTSCH 38999 Series III Composite Connectors



Operating Voltage	900 VAC
Voltage	2300 Vrms
Body Features	
Environmental Protection	Yes
Weight	21.7 g[.0479 lb]
Feedthrough Type	No
Environmental Protection Type	Elastomer Sealed
Entry Style	Rear Insertion
Fluid Type	Coolanol 25, M2-V, MIL-DTL-5624 (JP-4,JP- 5), MIL-DTL-83133 (JP-8), MIL-PRF-23699, MIL-PRF-5606, MIL-PRF-7808, SEA- AMS1424 Type I
Shell Plating Material	Cadmium, O.D.
Shell Base Material	Composite
Circular Connector Insulation Material Type	Hard Dielectric/Silicone
Hermetically Sealed	No
Contact Features	
Contact Quantity (Size 16)	8
Contact Current Rating (Max)	13 A
Reverse Gender	No
Contact Layout Arrangement	E08
Circular Connector Contact Type	Less Socket
Mechanical Attachment	
Mating Retention Type	Triple Start Threaded
Panel Mount Feature	Without
Connector Mounting Type	Panel Mount
Polarization Code	Ν
Mating Alignment Type	Keyed
	With
Mating Retention	
Mating Retention Housing Features Circular Connector Shell Size	17

Standard Circular Connectors, Cable-to-Panel, 8 Position, Sealable, Wire & Cable, Power, Panel Mount, DEUTSCH 38999 Series III Composite Connectors



Accepts Wire Insulation Diameter Range	1.65 – 2.77 mm[.065 – .109 in]
Assembly Length	31.5 mm[1.24 in]
Wire Size	.52 – 1.31 mm²
Usage Conditions	
Fluid Resistance	Yes
Operating Temperature Range	-65 – 200 °C[-85 – 392 °F]
Operation/Application	
Durability Rating	500 Cycles
Durability Rating Circuit Application	500 Cycles Power
Circuit Application	Power
Circuit Application Shielded	Power
Circuit Application Shielded Packaging Features	Power
Circuit Application Shielded Packaging Features Packaging Quantity	Power

### Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) SVHC > Threshold: Cd (3.45% in Plating) Decamethylcyclopentasiloxane (D5) (5% in Insert Subassembly) Article Safe Usage Statements: Use personal protective equipment as required. Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent

Standard Circular Connectors, Cable-to-Panel, 8 Position, Sealable, Wire & Cable, Power, Panel Mount, DEUTSCH 38999 Series III Composite Connectors



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## **Compatible Parts**



Also in the Series | DEUTSCH 38999 Series III Composite Connectors




Standard Circular Connectors(12001)

### **Customers Also Bought**



Standard Circular Connectors, Cable-to-Panel, 8 Position, Sealable, Wire & Cable, Power, Panel Mount, DEUTSCH 38999 Series III Composite Connectors



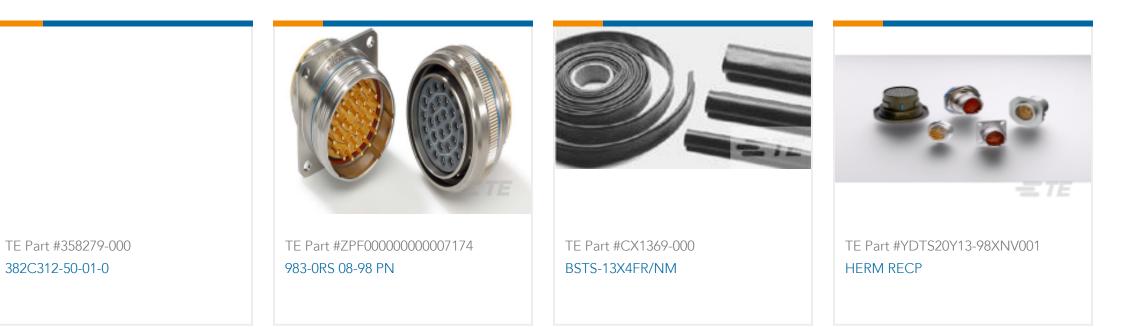



TE Part #CS8624-000 BSTS-15X4FR/NM

#### Documents

**Product Drawings** STRAIGHT PLUG

English

#### Datasheets & Catalog Pages DEUTSCH MIL-DTL-38999 Connectors Quick Reference Guide

English