

## MOSFET BASED DC SOLID STATE RELAY





- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ New innovative isolated driver ensuring fast power transistor turn on and off therefore low power transient.
- ▶ Ultra low output leakage current
- ▶ Low control current consumption
- ▶ Triggered control input to avoid linear control risks
- ▶ Low conducted and radiated disturbances

**SCM040600**



Control voltage range	4.5-32VDC
Max. output peak voltage	600VDC
Nom. load current with heatsink	40ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
Depends on protection clamping voltage	0 to 40A (with heatsink)	4.5-32VDC	4kV	M3 round tabs M5 round tabs	44.5 x 58.2 x 27 (mm)	100g

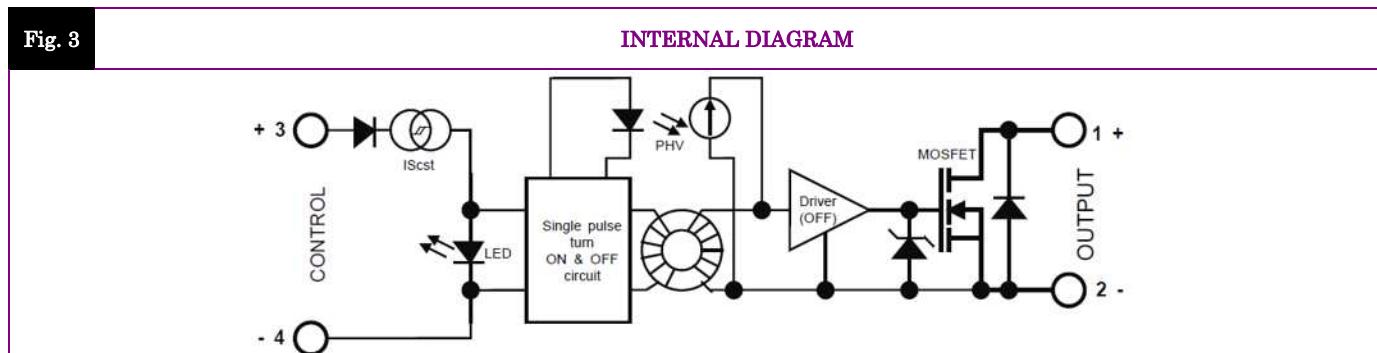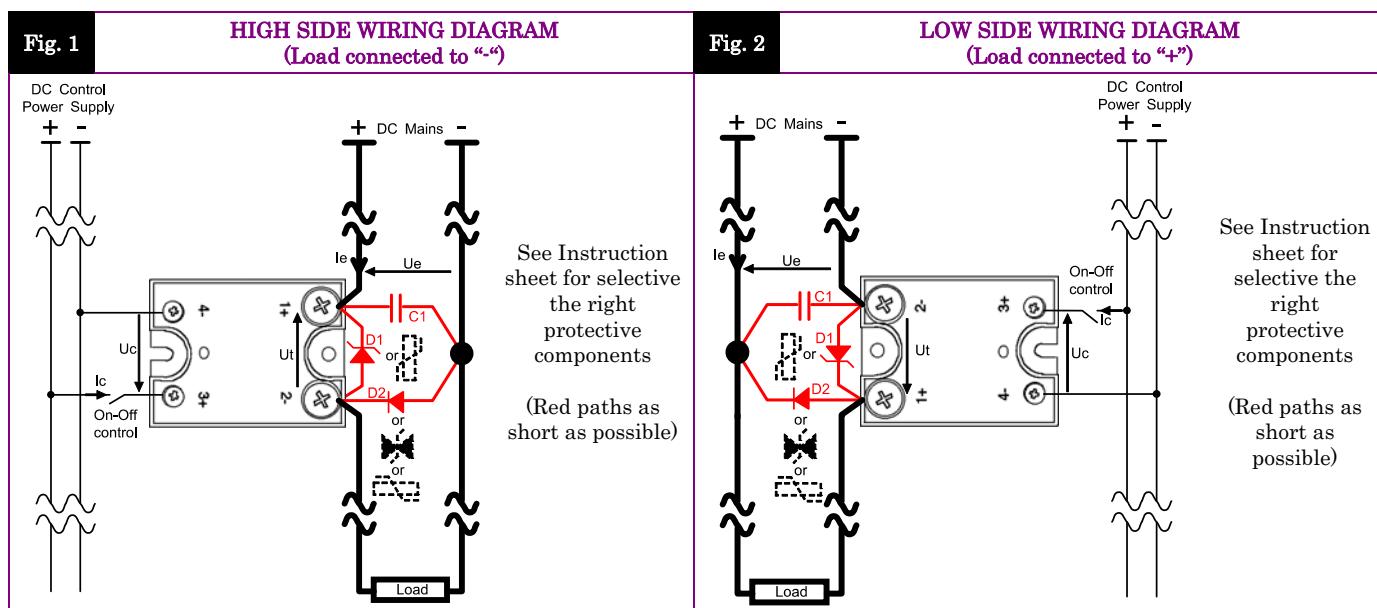

Proud to serve you

Data given at Tambient=40°C and subject to modification without previous notice

**CONTROL INPUT CHARACTERISTICS**

<b>INPUT CIRCUIT</b>	<b>CHARACTERISTIC</b>	<b>LABEL</b>	<b>VALUE</b>	<b>INFO.</b>
	Control voltage range	Uc	4.5 – 32VDC	
	Current consumption	Ic	25 – 42mAADC for control voltage range	See fig. 5
	Typical turn on voltage	Ucontyp	4.3V	
	Min. releasing voltage	Ucoffmin	1VDC	
	Typical releasing voltage	Ucofftyp	3.5V	
	Max. input voltage	Ucmax	32VDC	
	Max. reverse voltage	-Ucmax	32VDC	
	Max. reverse leakage current	-Icmax	100µA	
	Input impedance	Re	Current limitation	See fig. 5


**POWER OUTPUT CHARACTERISTICS**

<b>POWER CIRCUIT</b>	<b>CHARACTERISTIC</b>	<b>LABEL</b>	<b>VALUE</b>	<b>INFO.</b>	
	Mains voltage range	Ue	Depends on protection clamping voltage (D1)		
	Non-repetitive peak voltage	Utp	600V		
	Overvoltage protection	D1	Not integrated A voltage clamping mean must be connected across the terminals 1 & 2 (see fig 1 & 2)	See Instruction sheet for selective the right protective components	
	Reverse voltage (internal diode)	-Ut	1,2V	@Ie=47A @Uc=0	
	Max. repetitive avalanche current	Iep	20A	Pulse width limited by Tj max	
	Max. single pulse avalanche energy	Eep	1800mJ	@Ut=50V @Ie=10A	
	Max. repetitive pulse avalanche energy	Eep	1mJ	@Ie=20A	
	Maximum nominal currents	Ie	Resistive 40A	Motor Please consult us	See fig. 7 Values with heatsink
	Non-repetitive peak overload current	Iepeak	140A	See fig. 8	
	Min. load current	Iemin	0mA		
	Max. leakage current	Ielk	250µADC	@Utp @Tjmax	
	Max. on-state resistance	RDSon	140mΩ	@Iemax @Tjmax	
	Typ. output capacitance	Cout	2.2nF		
	Junction/case thermal resistance per power element	Rthjc	0.4K/W	Total = 1 power elements	
	Built-in heatsink thermal resistance vertically mounted	Rthra	8K/W	@ΔTra=60°C	
	Heatsink thermal time constant	Tthra	10min	@ΔTra=60°C	
	Control inputs/power outputs insulation voltage	Uiimp	4kV		
	Inputs/case insulation voltage	Uiimp	4kV		
	Outputs/case insulation voltage	Uiimp	4kV		
	Isolation resistance	Rio	1GΩ		
	Isolation capacitance	Cio	<8pF		
	Maximum junction temperature	Tjmax	150°C		
	Storage ambient temperature	Tstg	-40->+100°C		
	Operating ambient temperature	Tamb	-40->+90°C	See fig. 7	
	Max. case temperature	Tc	100°C		

## TIME CHARACTERISTICS

Fig. 4

## TIME DIAGRAMS

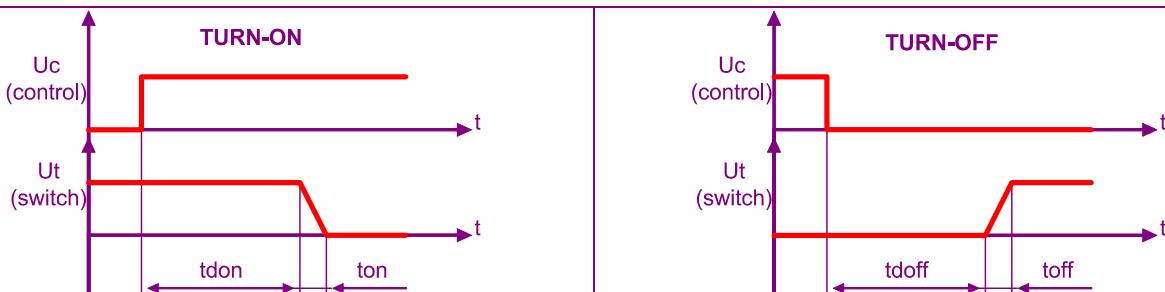

## TIME CHARACT.

CHARACTERISTIC	LABEL	VALUE	INFO.
Turn on time	ton	10µs (1.2µs typical)	
Turn on delay	tdon	600µs (500µs typical)	
Turn off time	toff	10µs (1µs typical)	
Turn off delay	tdoff	100µs (60µs typical)	
Max. On-Off frequency	F(on-off)	700Hz	

## GENERAL INFORMATION

CONNEX- TIONS	Connections	Power	Control	
	Screwdriver advised	Philips™ NR2	Philips™ NR1	
	Min and max tightening torque	1.8 N.m	0.8 N.m	
	Insulated crimp terminals (round tabs, eyelet type)	M5	M3	
MISC.	Display	Green LED (indicates relay has switched ON)		
	Housing	UL94V0		
	Mounting	2 screws (M4x12mm)	See mounting sheet	
	Noise level	No audible noise		
	Weight	100g		

## STANDARDS

GENERAL	Standards	IEC60947-1	
	Protection level	IP00	
	Protection against direct touch	None	
	CE marking	Yes	
	UL, cULUS	Yes	

E.M.C. IMMUNITY	TYPE OF TEST	STANDARD	LEVEL	EFFECT
	E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
	Radiated electromagnetic fields	EN61000-4-3	Pending	?
	Fast transients bursts	EN61000-4-4	4kV coupling by clamp on the input side and direct for power side	No effect
	Electric chocks	EN61000-4-5	1kV direct coupling on the input side (pending for power side)	?
	Voltage drop	EN61000-4-11	-	

E.M.C. EMISSION	Radiated and conducted disturbances	NFEN55011	Pending	
--------------------	-------------------------------------	-----------	---------	--

## CHARACTERISTIC CURVES

Fig. 5

INPUT CHARACTERISTIC

Ic (mA DC)

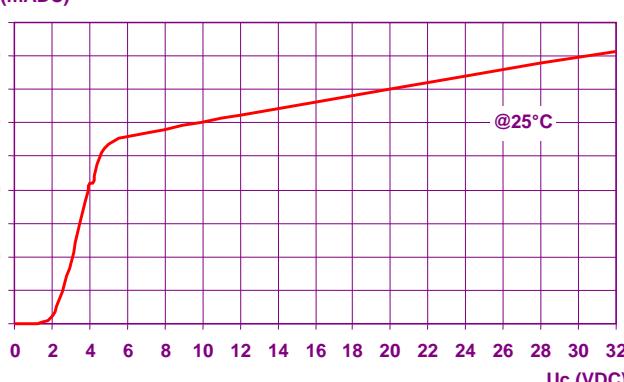


Fig. 6

ON RESISTANCE VS TEMPERATURE

RDSon (mOhms)

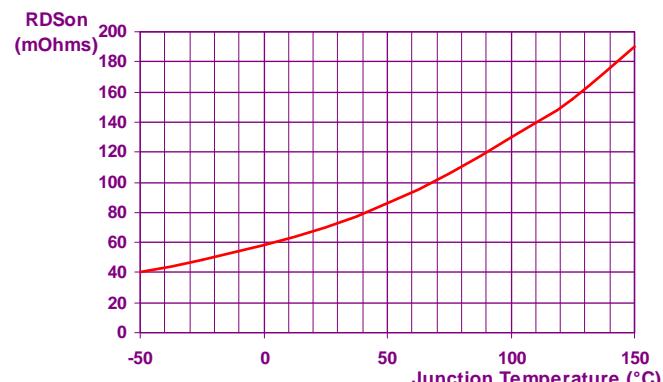


Fig. 7

POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE



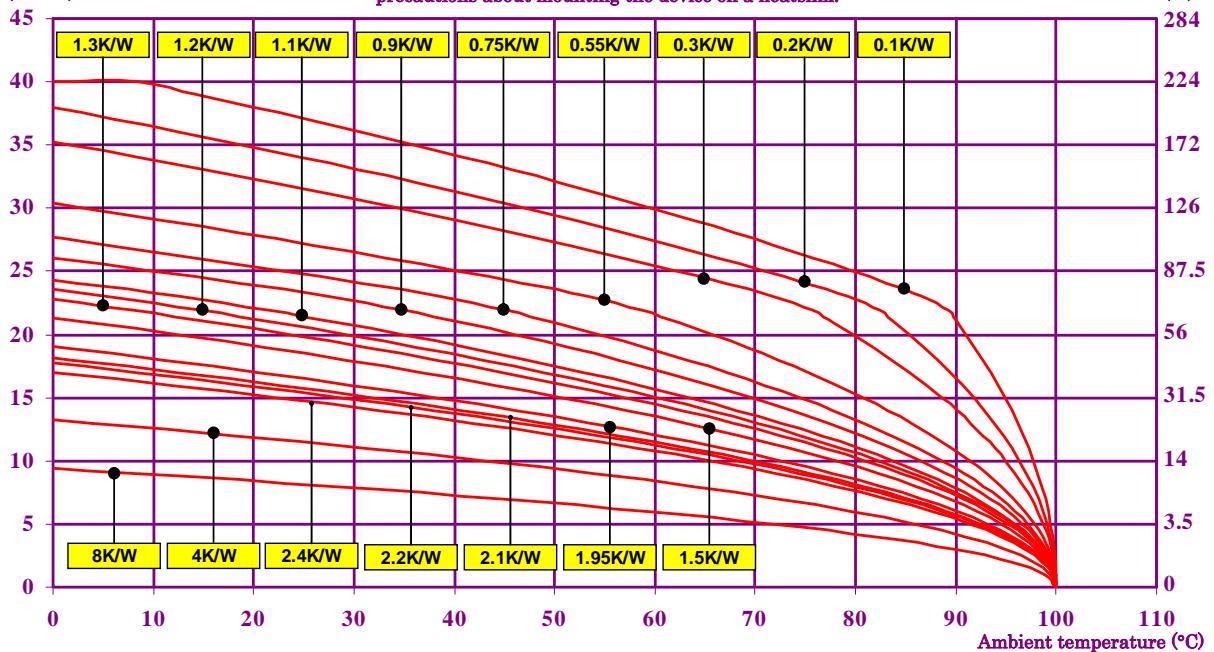
Permanent current  
Ie (ARMS)Please refer to the installation notice for  
precautions about mounting the device on a heatsink.Power dissipated  
(W)8K/W = No Heatsink 4K/W = No reference 2.4K/W = WF152100  
2.1K/W = WF210000 1.95K/W = WF191100 1.5K/W = WF141100 2.2K/W = WF262100 2.2K/W = WF151200  
1.1K/W = WF131100 0.9K/W = WF092000 0.9K/W = WF115100 1.3K/W = WF129100 1.2K/W = WF121000  
0.3K/W = WF081100 0.2K/W = WF020000 0.1K/W = No reference 0.7K/W = WF070000 0.55K/W = WF050000

Fig. 8


CURRENT OVERLOAD CHARACTERISTIC

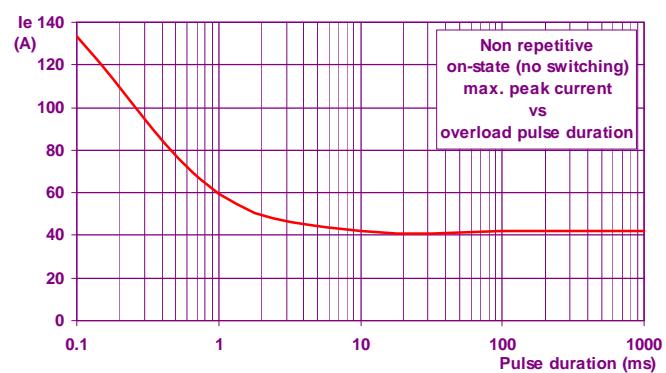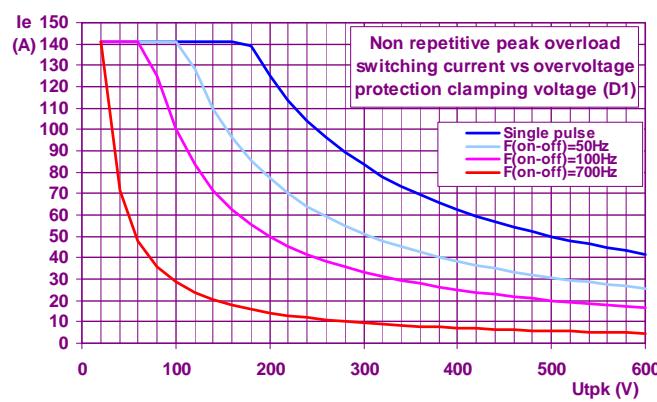


## DIMENSIONS AND ACCESSORIES

Fig. 9

## DIMENSIONS

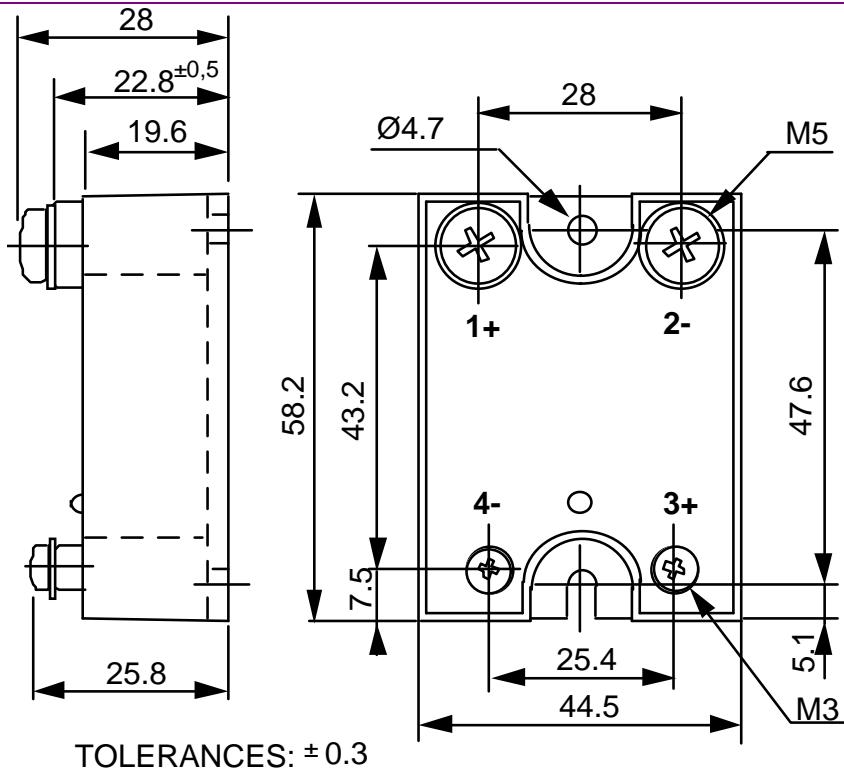Fig.  
10

## ACCESSORIES

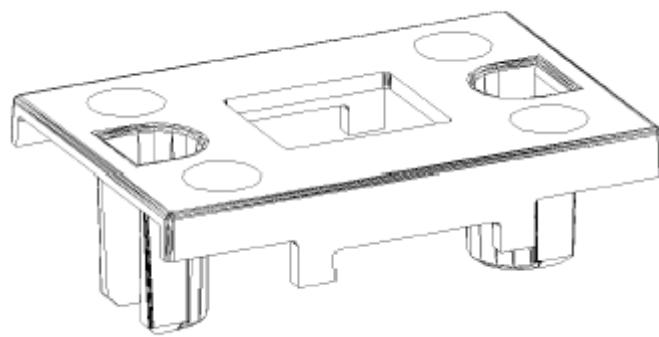

PROTECTIVE COVER 1K470000