DESKTOP - 24vdc 2.7A (65W) TIGER PART: TP1030

Features:

- Constant voltage design with over voltage, short circuit & OC protections
- Universal 100-240vac input voltage
- Class I design 3 Pin C14 input (Class II version also available)
- Level VI efficiency
- Approved to latest 62368-1 world safety standards including CE & UL
- Meets new UKCA UK safety legislation

ions ()

The Tiger Power range of switch mode power supplies feature full safety approvals and meet latest level VI energy efficiency requirements. The TP1030 24vdc 2.7 amp model provides a reliable constant voltage output at up to 65 Watts continuous, suitable for a wide range of applications.

Power :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CB		
Part number (European cable):TP1030-EU (cable boxed separately)Input voltage:100-240vac (90-264vac max.)Input frequency:47 - 63HzOutput voltage:24vdcCurrent:2.7APower :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5ALoad regulation:+/ - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Part number (no mains cable included):	TP1030
Input voltage:100-240vac (90-264vac max.)Input frequency:47 - 63HzOutput voltage:24vdcCurrent:2.7APower :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AIncush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Part number (Supplied with separate UK cable) :	TP1030-UK (cable boxed separately)
Input frequency:47 - 63HzOutput voltage:24vdcCurrent:2.7APower :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInvsh Current at 230vac:80A max.Load regulation:+/ - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:	Part number (European cable):	TP1030-EU (cable boxed separately)
Output voltage:24vdcOutput voltage:2.7ACurrent:2.7APower :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Input voltage:	100-240vac (90-264vac max.)
Current:2.7APower :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+/ - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Input frequency:	47 - 63Hz
Power :65 WattsProtection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+/ - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Output voltage:	24vdc
Protection:Short Circuit, Over current protectionDimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Current:	2.7A
Dimensions:120.3 x 50.3 x 33.5mmWeight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Power :	65 Watts
Weight:220gAC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+/ - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Protection:	Short Circuit, Over current protection
AC cord length (where supplied):1.8 metresDC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Dimensions:	120.3 x 50.3 x 33.5mm
DC cord length:1.5 metresDC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Weight:	220g
DC connector:2.1 x 5.5 x 12mm (Female) Other options on requestPolarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	AC cord length (where supplied):	1.8 metres
Polarity:+ve (positive) centreEfficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	DC cord length:	1.5 metres
Efficiency:88%Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	DC connector:	2.1 x 5.5 x 12mm (Female) Other options on request
Input current RMS Max.:1.5AInrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Polarity:	+ve (positive) centre
Inrush Current at 230vac:80A max.Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Efficiency:	88%
Load regulation:+ / - 5%Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Input current RMS Max.:	1.5A
Safety approval:62368-1 including UL (USA), CE and C-Tick (Australia), CBM.T.B.F:50,000 hours	Inrush Current at 230vac:	80A max.
M.T.B.F: 50,000 hours	Load regulation:	+ / - 5%
	Safety approval:	62368-1 including UL (USA), CE and C-Tick (Australia), CB
Operating temperature: 0°C to + 40°C	M.T.B.F:	50,000 hours
	Operating temperature:	0°C to + 40°C


TIGER POWER PRODUCTS – QUALITY & RELIABILITY

This specification is not for general release or circulation. Tiger Power reserves the right to make changes to spec. or product without notice or liability.



DESKTOP- 24vdc 2.7A (65W) TIGER PART: TP1030



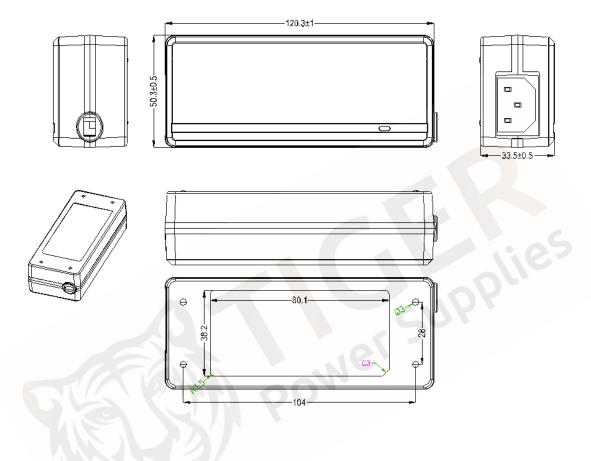

TIGER POWER PRODUCTS – QUALITY & RELIABILITY

This specification is not for general release or circulation. Tiger Power reserves the right to make changes to spec. or product without notice or liability.