




## Inductive sensor

IG-2008-FRKG/PH

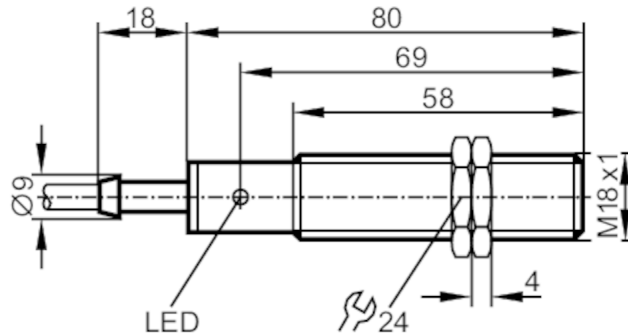

### Product characteristics

Electrical design	PNP/NPN	
Output function	normally open / normally closed; (selectable)	
Sensing range [mm]	8	
Housing	threaded type	
Dimensions [mm]	M18 x 1 / L = 80	

### Electrical data

Operating voltage [V]	10...55 DC	
Protection class	II	
Reverse polarity protection	yes	

### Outputs

Electrical design	PNP/NPN	
Output function	normally open / normally closed; (selectable)	
Max. voltage drop switching output DC [V]	4.6	
Minimum load current [mA]	4	
Max. leakage current [mA]	0.8	
Permanent current rating of switching output DC [mA]	400	
Switching frequency DC [Hz]	300	
Short-circuit protection	yes	
Type of short-circuit protection	pulsed	
Overload protection	yes	

### Detection zone

Sensing range [mm]	8	
Real sensing range $S_r$ [mm]	$8 \pm 10\%$	
Operating distance [mm]	0...6.5	

### Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis [% of $S_r$ ]	1...15	
Switch point drift [% of $S_r$ ]	-10...10	



# IG5533



## Inductive sensor

IG-2008-FRKG/PH

Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	1806
Mechanical data		
Weight	[g]	103
Housing		threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 80
Thread designation		M18 x 1
Materials		PBT
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Accessories (supplied)		lock nuts: 2
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m, PUR / PVC; 2 x 0.5 mm <sup>2</sup>		
Connection		

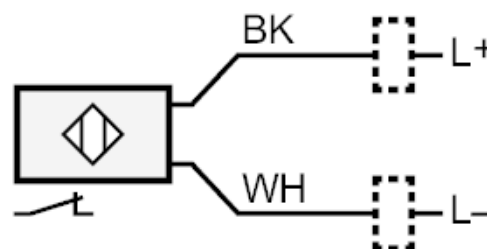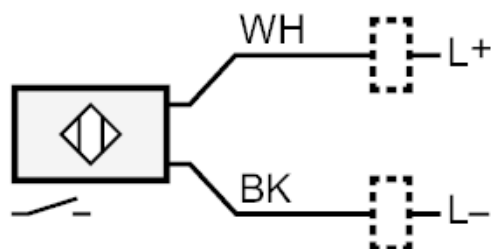

Core colours :

BK = black  
WH = white