


SERIES: PRQE50W-D | DESCRIPTION: DC-DC CONVERTER
FEATURES

- 50 W isolated output
- ¼-Brick package with industry standard pin-out
- ultra-wide input voltage range, 9~75 V
- single regulated output
- output short circuit, over current, over voltage, & over temperature protection
- 3000 Vdc isolation
- meets UL/EN/IEC 62368-1
- designed to meet EN 61373 and EN 45545-2
- meets EN 50155 with external components
- 5000 meter operating altitude



| MODEL | input voltage | | output voltage | output current | output power | ripple & noise ¹ Vo1/Vo2 | efficiency ² |
|-------------------|---------------|----------------|----------------|----------------|--------------|--|-------------------------|
| | typ (Vdc) | range (Vdc) | (Vdc) | max (A) | max (W) | max (mVp-p) | typ (%) |
| PRQE50W-E12-S12-D | 36 | 9~75 | 12 | 4.17 | 50 | 150 | 90 |
| PRQE50W-E12-S15-D | 36 | 9~75 | 15 | 3.33 | 50 | 150 | 90 |
| PRQE50W-E12-S24-D | 36 | 9~75 | 24 | 2.08 | 50 | 240 | 90 |
| PRQE50W-E12-S28-D | 36 | 9~75 | 28 | 1.79 | 50 | 240 | 90 |
| PRQE50W-E12-S48-D | 36 | 9~75 | 48 | 1.05 | 50 | 480 | 90 |

Notes: 1. Peak to peak, 5Hz to 20MHz bandwidth, full load, 22µF aluminum solid capacitor and 1µF ceramic capacitor.
2. 36Vdc input voltage.

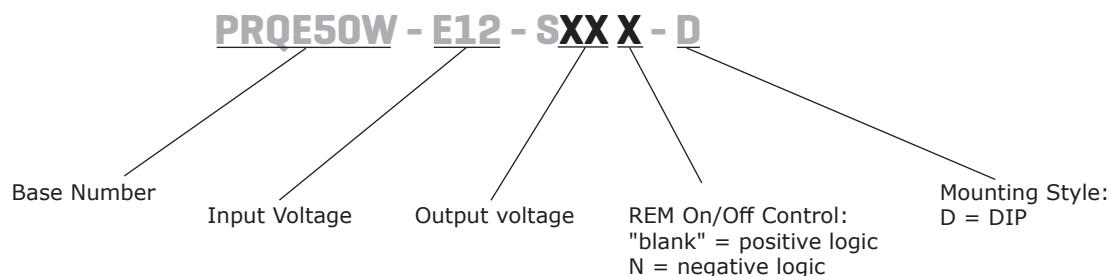PART NUMBER KEY


INPUT

| parameter | conditions/description | min | typ | max | units |
|----------------------------|-----------------------------------|--|-----|-----|------------------|
| input voltage | | 9 | | 75 | Vdc |
| surge voltage | for maximum of 0.1 second | | | 100 | Vdc |
| current | at 9 Vdc input voltage, full load | | 6.7 | | A |
| inrush current | | | | 0.1 | A ² s |
| filter | Pi filter | | | | |
| remote on/off ³ | positive logic | models ON (>4.0 Vdc or on/off pin open circuit) | | | |
| | | models OFF (on/off pin 0~1.0 Vdc) | | | |
| | negative logic | models ON (on/off pin 0~1.0 Vdc) | | | |
| | | models OFF (>4.0 Vdc or on/off pin open circuit) | | | |

Notes: 3. - Voltages referenced to -Vin pin.

OUTPUT

| parameter | conditions/description | min | typ | max | units |
|------------------------------|---|-----|-----|-------|-------|
| maximum capacitive load | 12 Vdc output model | | | 8,000 | μF |
| | 15 Vdc output model | | | 6,800 | μF |
| | 24 Vdc & 28 Vdc output models | | | 2,350 | μF |
| | 48 Vdc output model | | | 700 | μF |
| voltage accuracy | at 36 Vdc input voltage, full load, 25°C | | | ±1.0 | % |
| line regulation | from low line to high line, full load | | | ±0.2 | % |
| load regulation | from full load to no load | | | ±0.2 | % |
| switching frequency | PWM mode | | 200 | | kHz |
| transient recovery time | 75% ~ 100%, nominal input voltage | | | 250 | μs |
| transient response deviation | 75% ~ 100%, nominal input voltage | | | ±5 | % |
| temperature coefficient | 40°C ~ 105°C | | | ±0.02 | %/°C |
| adjustability | output power ≤ max. rated power | -20 | | 15 | % |
| remote sense | output power ≤ max. rated power, nominal output voltage | | | 15 | % |

PROTECTIONS

| parameter | conditions/description | min | typ | max | units |
|-----------------------------|--|-----|------------|-----|----------|
| over current protection | auto recovery, hiccup | 110 | | 210 | % |
| over temperature protection | temperature measured at center of base plate shutdown recovery | | 110 100 | | °C °C |
| short circuit protection | continuous, auto recovery | | | | |

SAFETY AND COMPLIANCE

| parameter | conditions/description | min | typ | max | units |
|-------------------------------|---|-----|-------|----------------|------------|
| isolation voltage | input to output, for 1 minute | | | 3,000 4,200 | Vac Vdc |
| | input to case, for 1 minute | | | 2,100 3,000 | Vac Vdc |
| | output to case, for 1 minute | | | 1,500 2,100 | Vac Vdc |
| isolation resistance | input to output | 100 | | | MΩ |
| isolation capacitance | input to output; output to case | | 1,000 | | pF |
| safety approvals | certified to 62368: UL/EN/IEC | | | | |
| conducted emissions | EN 55032 & EN 50155 Class A (with external filter) | | | | |
| radiated emissions | EN 55032 & EN 50155 Class A (with external filter) | | | | |
| ESD | EN 61000-4-2 Level 3: Air ±8kV, Contact ±6kV Perf. Criteria A | | | | |
| radiated immunity | EN 61000-4-3 Level 3: 80~1000MHz, 20V/m Perf. Criteria A | | | | |
| EFT/burst | EN 61000-4-4 Level 3: On power input port, ±2kV, external input capacitor required Perf. Criteria A | | | | |
| surge | EN 61000-4-5 Level 4: Line to earth, ±4kV, Line to line, ±2kV Perf. Criteria A | | | | |
| conducted immunity | EN 61000-4-6 Level 3: 0.15~80MHz, 10V Perf. Criteria A | | | | |
| magnetic immunity | EN 61000-4-8 Level 1: 50Hz, 1A/m for EN55035:2017 Perf. Criteria A | | | | |
| voltage dips and interruption | EN 50155 Class S3: 20ms interruptions Perf. Criteria A | | | | |
| MTBF | as per MIL-HDBK-217F, 25°C | | | | |
| | 12 Vdc output model | | 718 | | kHours |
| | 15 Vdc output model | | 803 | | kHours |
| | 24 Vdc output model | | 811 | | kHours |
| | 28 Vdc output model | | 800 | | kHours |
| | 48 Vdc output model | | 807 | | kHours |
| RoHS | yes | | | | |

ENVIRONMENTAL

| parameter | conditions/description | min | typ | max | units |
|-------------------------------|---------------------------------|-----|-----|-----|-------|
| ambient operating temperature | see derating curve | -40 | | 105 | °C |
| storage temperature | | -55 | | 125 | °C |
| case temperature | measured at center of baseplate | | | 105 | °C |
| storage humidity | non-condensing | - | | 95 | % |

MECHANICAL


| parameter | conditions/description | min | typ | max | units |
|---------------|--|-----|-----|-----|-------|
| dimensions | 2.28 × 1.45 × 0.50 [57.9 × 36.8 × 12.7 mm] | | | | inch |
| case material | plastic, DAP, UL 94V-0 | | | | |
| weight | | | 66 | | g |

MECHANICAL DRAWING

units: inch [mm]


tolerances: inch: x.xx = ±0.02, x.xxx = ±0.010

mm: x.x = ±0.5, x.xx = ±0.25

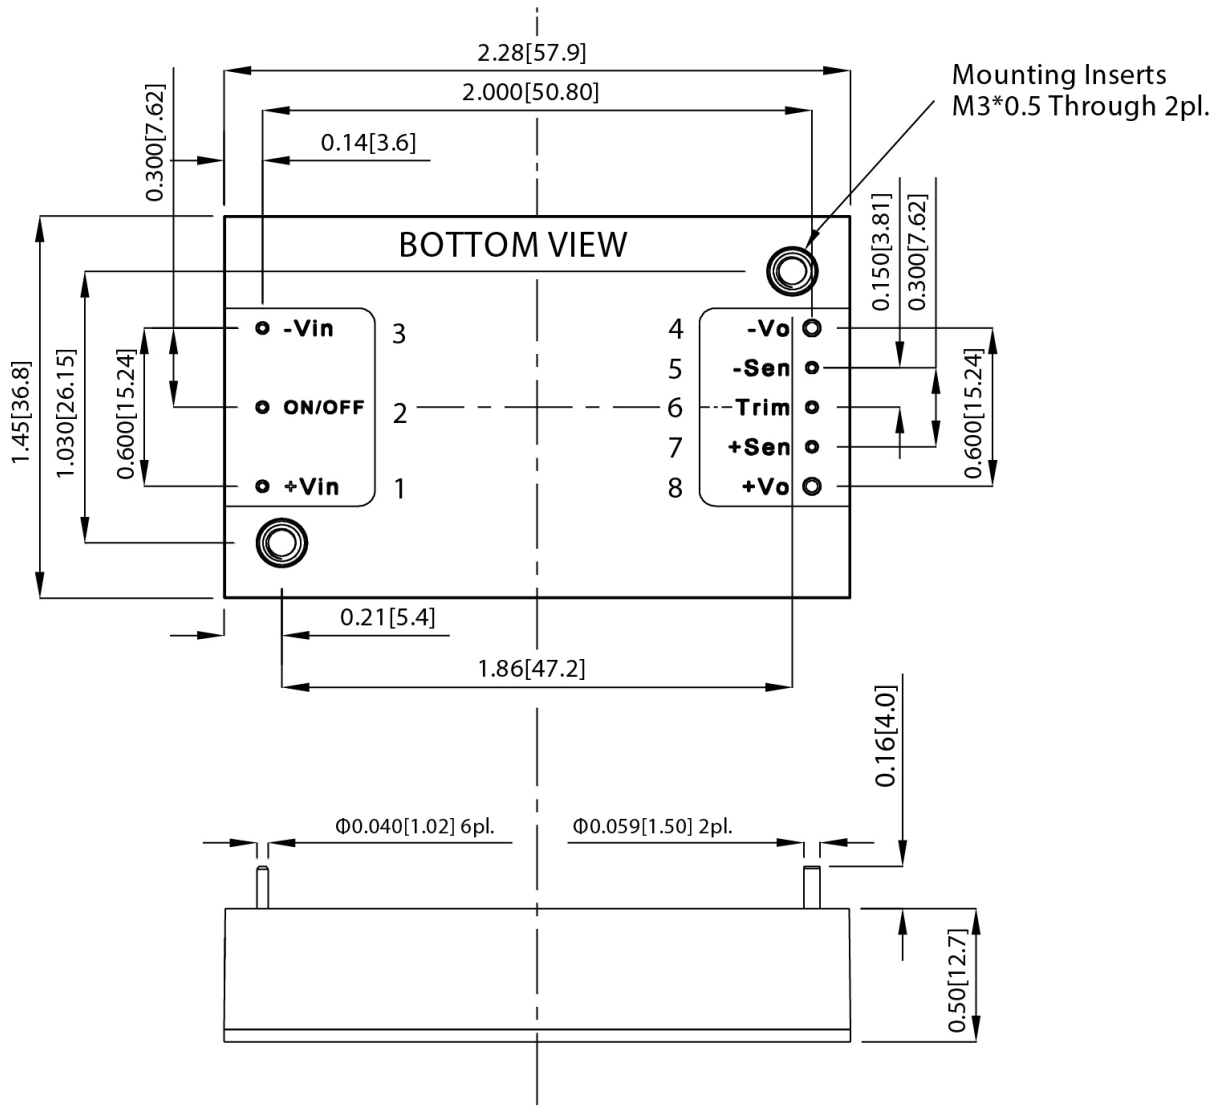


| PIN Out | |
|---------|----------|
| PIN | Function |
| 1 | +Vin |
| 2 | ON/OFF |
| 3 | -Vin |
| 4 | -Vo |
| 5 | -Sense |
| 6 | Trim |
| 7 | +Sense |
| 8 | +Vo |

DERATING CURVES

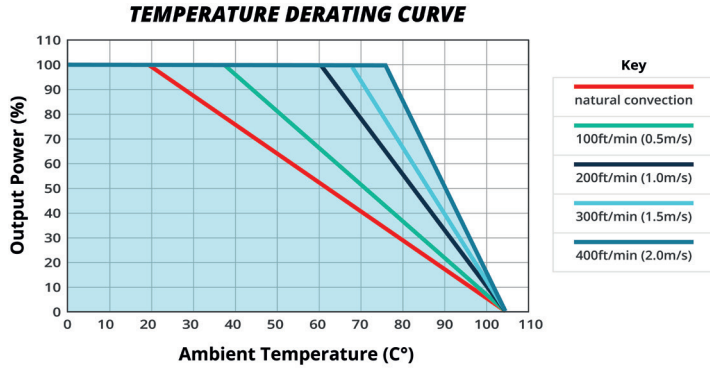


EFFICIENCY CURVES


**EFFICIENCY VS OUTPUT LOAD
PRQE50W-E12-S12-D
(25°C)**

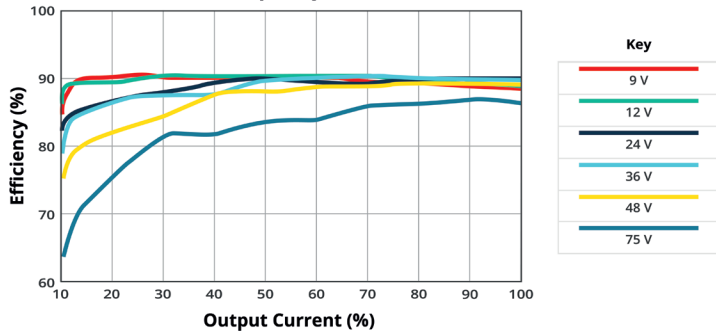


**POWER DISSIPATION VS OUTPUT POWER
PRQE50W-E12-S12-D
(25°C)**

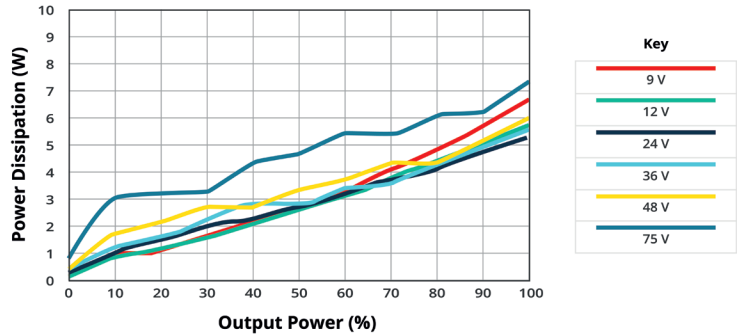

**EFFICIENCY VS OUTPUT LOAD
PRQE50W-E12-S15-D
(25°C)**

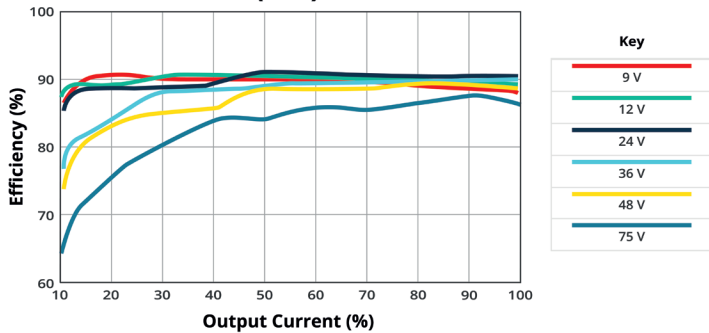


**POWER DISSIPATION VS OUTPUT POWER
PRQE50W-E12-S15-D
(25°C)**

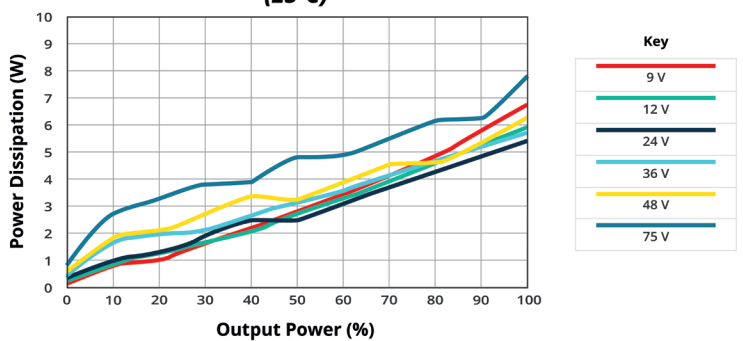


EFFICIENCY CURVES (CONTINUED)


EFFICIENCY VS OUTPUT LOAD
PRQE50W-E12-S24-D
(25°C)

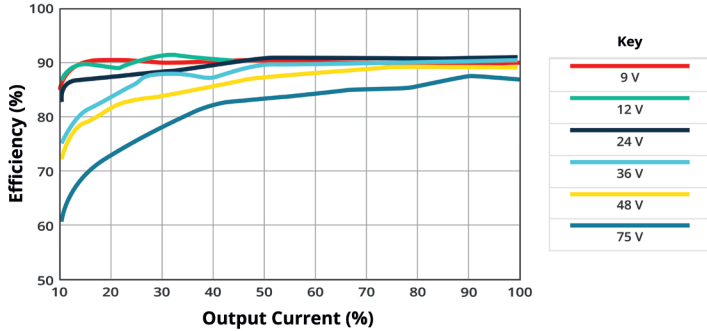


POWER DISSIPATION VS OUTPUT POWER
PRQE50W-E12-S24-D
(25°C)

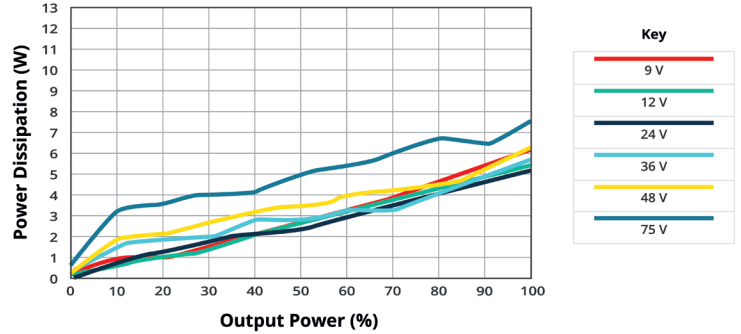


EFFICIENCY VS OUTPUT LOAD
PRQE50W-E12-S28-D
(25°C)

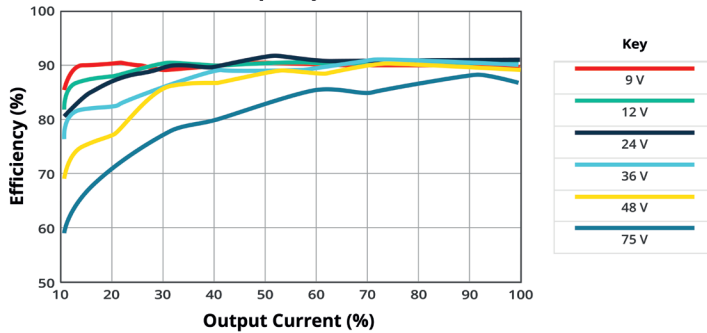


POWER DISSIPATION VS OUTPUT POWER
PRQE50W-E12-S28-D
(25°C)

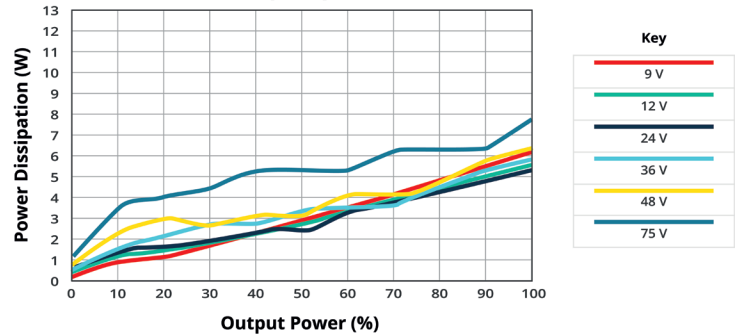

EFFICIENCY VS OUTPUT LOAD
PRQE50W-E12-S48-D
(25°C)

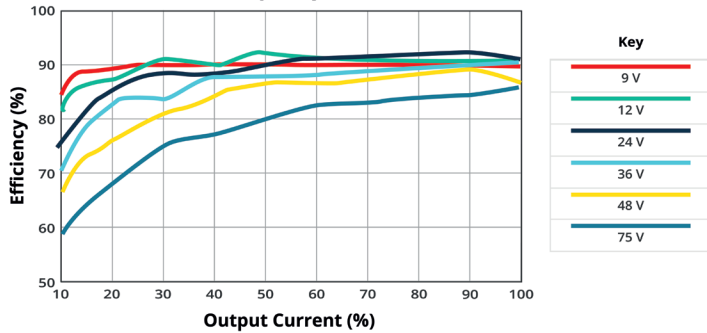


POWER DISSIPATION VS OUTPUT POWER
PRQE50W-E12-S48-D
(25°C)

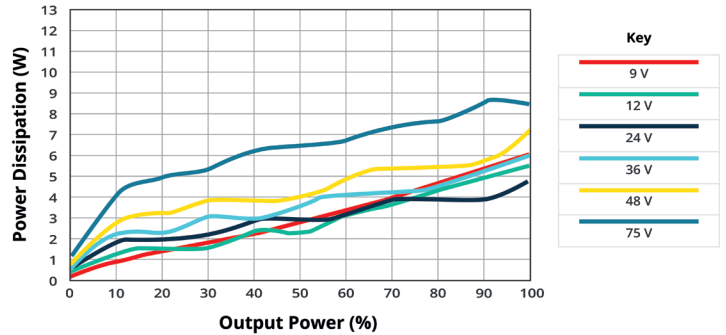


APPLICATION NOTES

Figure 3

Trim up

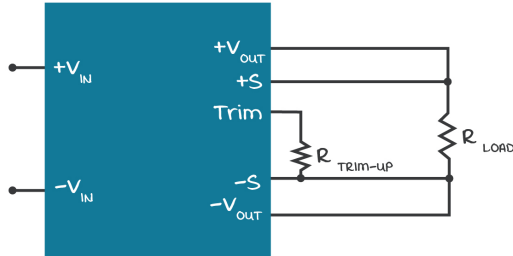

Trim down

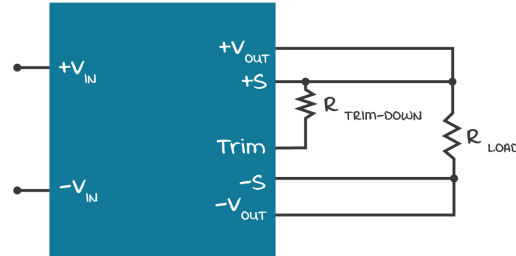

$$R_{\text{TRIM}} = \left[\frac{V_{\text{REF}} \times R_1 \times (R_2 + R_3)}{R_2 \times (V_{\text{OUT}} - V_{\text{OUT, NOM}})} \right] - R_{\text{TRIM}} \text{ (k}\Omega\text{)}$$

Formula for Trim up

$$R_{\text{TRIM}} = R_1 \times \left[\frac{V_{\text{REF}} \times R_1}{R_2 \times (V_{\text{OUT, NOM}} - V_{\text{OUT}})} - 1 \right] - R_{\text{TRIM}} \text{ (k}\Omega\text{)}$$

Formula for Trim down

$$R_{\text{TRIM}} = \left[\frac{2.5 \times 8.2 \times (2.4 + 0.91)}{2.4 \times (13.8 - 12)} \right] - 3.9 = 11.81 \text{ (k}\Omega\text{)}$$

Example for Trim up

$$R_{\text{TRIM}} = 8.2 \times \left[\frac{2.5 \times 8.2}{2.4 \times (12 - 9.6)} - 1 \right] - 3.9 = 17.08 \text{ (k}\Omega\text{)}$$

Example for Trim down

Table 3

| V _{OUT} (Vdc) | R ₁ (kΩ) | R ₂ (kΩ) | R ₃ (kΩ) | R _{TRIM} (kΩ) | V _{REF} (V) |
|---------------------------|------------------------|------------------------|------------------------|---------------------------|-------------------------|
| 12 | 8.2 | 2.4 | 0.91 | 3.9 | 2.5 |
| 15 | 11.0 | 2.4 | 1.0 | 3.0 | 2.5 |
| 24 | 19.1 | 2.32 | 0.845 | 3.9 | 2.5 |
| 28 | 22.6 | 2.32 | 1.05 | 3.9 | 2.5 |
| 48 | 35.7 | 2.0 | 0.698 | 3.9 | 2.5 |

Note: R_{TRIM}: External resistor in KΩ
 V_{OUT, NOM}: Nominal output voltage
 V_{OUT}: Desired output voltage
 R₁, R₂, R₃, R_{TRIM}, V_{REF}: refer to Table 3 (fixed internal values)

REVISION HISTORY

| rev. | description | date |
|------|-----------------|------------|
| 1.0 | initial release | 05/10/2022 |

The revision history provided is for informational purposes only and is believed to be accurate.



Headquarters
20050 SW 112th Ave.
Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.