



CIRCUIT BREAKER CURR. SENS DC 220V AC
230/400V 10KA, 1-POLE, B, 25A

| Model | | |
|------------------------------|--|--------------------------------|
| product brand name | | SENTRON |
| Product designation | | 5SY miniature circuit breaker |
| Design of the product | | 5SY miniature circuit breakers |

| General technical data | | |
|---|--|--------|
| Number of poles | | 1 |
| Number of poles / Note | | 1P |
| Tripping characteristic class | | B |
| circuit-breaker / Design | | 5SY5 |
| Mechanical service life (switching cycles) / typical | | 20 000 |
| Oversvoltage category | | 3 |

| Voltage | | |
|---|---|-----|
| Insulation voltage | | |
| <ul style="list-style-type: none"> • for DC / Rated value | V | 250 |
| <ul style="list-style-type: none"> • with single-phase operation / with AC / Rated value | V | 250 |
| <ul style="list-style-type: none"> • with multi-phase operation / with AC / Rated value | V | 440 |

| Supply voltage | | |
|--|----|----|
| Supply voltage frequency / Rated value | Hz | 50 |

| Protection class | | |
|------------------------------|--|---------------------------------|
| Protection class IP | | IP20, with connected conductors |
| Energy limiting class | | 3 |

Switching capacity

Switching capacity current

- | | | |
|--|----|----|
| • for DC / acc. to IEC 60947-2 / Rated value | kA | 15 |
| • acc. to EN 60898 / Rated value | kA | 10 |

Dissipation

Active power loss

- | | | |
|--|---|-----|
| • for rated value of the current / with AC / in hot operating state / per pole | W | 2.4 |
|--|---|-----|

Electricity

- | | | |
|---------------------------------|---|----|
| Current / with AC / Rated value | A | 25 |
|---------------------------------|---|----|

Product details

- | | | |
|------------------------------------|--|-----|
| Product feature / Touch protection | | Yes |
|------------------------------------|--|-----|

Product component

- | | | |
|----------------------------|--|-----|
| • combined terminal top | | Yes |
| • combined terminal bottom | | Yes |

Product property

- | | | |
|--|--|-----|
| • Properties for main switches in accordance with EN 60204-1 | | Yes |
| • halogen-free | | Yes |
| • sealable | | Yes |
| • silicon-free | | Yes |

- | | | |
|--|--|-----|
| Product expansion / can be installed / supplementary devices | | Yes |
|--|--|-----|

Product function

- | | | |
|--|--|----|
| Product function / neutral conductor switching | | No |
|--|--|----|

Short circuit

Breaking capacity short-circuit current (I_{cn})

- | | | |
|-------------------------------|----|----|
| • for DC / acc. to EN 60898-2 | kA | 10 |
|-------------------------------|----|----|

Number

- | | | |
|--|--|---|
| Number of test cycles / for environmental testing / acc. to IEC 60068-2-30 | | 6 |
|--|--|---|

Connections

Connectable conductor cross-section / stranded

- | | | |
|-----------|-----------------|------|
| • minimum | mm ² | 0.75 |
| • maximum | mm ² | 35 |

Connectable conductor cross-section

- | | | |
|--|-----------------|------|
| • solid | | |
| — minimum | mm ² | 0.75 |
| — maximum | mm ² | 35 |
| • finely stranded / with core end processing | | |

| | | |
|--|-----------------|------|
| — minimum | mm ² | 0.75 |
| — maximum | mm ² | 25 |
| AWG number / as coded connectable conductor cross section | | |
| • minimum | | 14 |
| • maximum | | 4 |
| Tightening torque [lbf·in] / with screw-type terminals | | |
| • minimum | lbf·in | 22 |
| • maximum | lbf·in | 26 |
| Tightening torque / with screw-type terminals | | |
| • minimum | N·m | 2.5 |
| • maximum | N·m | 3 |
| Position / of power supply cord | | Any |

Mechanical Design

| | | |
|------------------------------|----|-----------------------|
| Height | mm | 90 |
| Width | mm | 18 |
| Depth | mm | 76 |
| mounting position | | any |
| Installation depth | mm | 70 |
| Number of width units | | 1 |
| Mounting type | | Quick assembly system |

Environmental conditions

| | | |
|---|----|---|
| Influence of the surrounding temperature | | Max. 95% humidity |
| Shock resistance / acc. to IEC 60068-2-27 | | 150m/s ² at 11ms half-sine |
| Vibration resistance / acc. to IEC 60068-2-6 | | 50m/s ² at 25 to 150Hz and 60m/s ² at 35Hz (4sec) |
| Ambient temperature | | |
| • minimum | °C | -25 |
| • maximum | °C | 55 |
| • during storage / minimum | °C | -40 |
| • during storage / maximum | °C | 75 |

Certificates

| | | |
|--|--|---|
| Equipment marking / acc. to DIN EN 61346-2 | | F |
|--|--|---|

| | | |
|--------------------------|---------------------------|-------------------|
| General Product Approval | Declaration of Conformity | Test Certificates |
|--------------------------|---------------------------|-------------------|



CCC



GOST



VDE



EG-Konf.

[other](#)

other

[other](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SY51256>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SY51256/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY51256

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

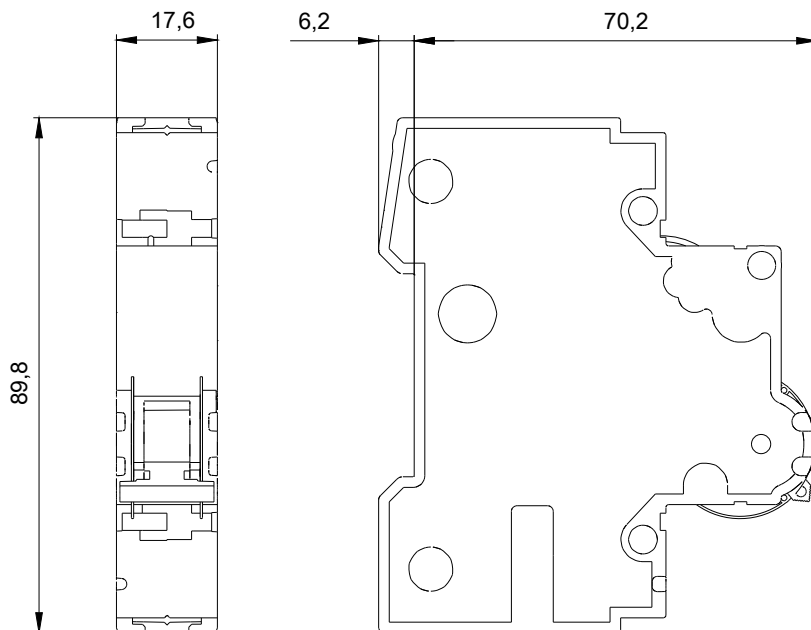

last modified:

11.03.2015