


**Both NO and NC contacts incorporated in a compact DIP8-pin Reinforced insulation**

**PhotoMOS®  
GE 1 Form A & 1 Form B  
(AQW610EH)**

### FEATURES

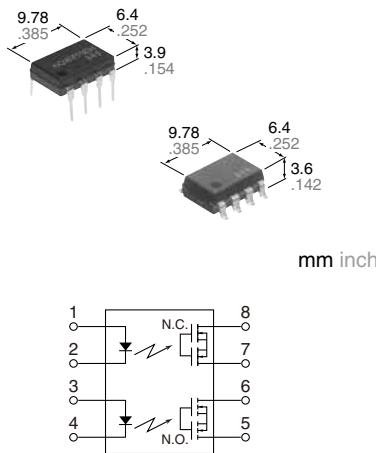

**RoHS compliant**

**1. 60V type couples high capacity (0.5A) with low on-resistance (typ. 1Ω).**

**2. Reinforced insulation 5,000 V**

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

**3. Approx. 1/2 the space compared with the mounting area of a set of 1 Form A and 1 Form B PhotoMOS**

**4. Applicable for 1 Form A and 1 Form B use as well as two independent 1 Form A and 1 Form B use**

**5. Controls low-level analog signals**

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

**6. High sensitivity and high speed response**

Can control max. 0.14 A load current with 5 mA input current. Fast operation speed of typ. 0.5 ms [N.O.] (AQW610EH).

**7. Low-level off-state leakage current**

### TYPICAL APPLICATIONS

- Power supply
- Measuring instruments
- Security equipment
- Modem
- Telephone equipment
- Electricity, plant equipment
- Sensing equipment

### TYPES

| I/O isolation voltage |                    | Output rating* |              | Package  | Part No.   |            |                             | Packing quantity |  |  |
|-----------------------|--------------------|----------------|--------------|----------|--|------------|-----------------------------|------------------|--|--|
|                       |                    | Load voltage   | Load current |          | Through hole terminal  |            | Surface-mount terminal      |                  |  |  |
|                       |                    |                |              |          | Tube packing style   |            | Tape and reel packing style |                  |  |  |
| AC/DC dual use        | Reinforced 5,000 V |                |              | DIP8-pin | AQW612EH   | AQW612EHA  | AQW612EHAX                  | AQW612EHAZ       |  |  |
|                       |                    |                |              |          | AQW610EH   | AQW610EHA  | AQW610EHAX                  | AQW610EHAZ       |  |  |
|                       |                    |                |              |          | AQW614EH   | AQW614EHA  | AQW614EHAX                  | AQW614EHAZ       |  |  |
| AC/DC dual use        | Reinforced 5,000 V |                |              | DIP8-pin | 1 tube contains:<br>50 pcs.<br>1 batch contains:<br>500 pcs. | 1,000 pcs. |                             |                  |  |  |

\*Indicate the peak AC and DC values.

Note: The surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

### RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


| Item                    | Symbol                  | AQW612EH(A)       | AQW610EH(A)     | AQW614EH(A)     | Remarks  |
|-------------------------|-------------------------|-------------------|-----------------|-----------------|--|
| Input                   | LED forward current     | I <sub>F</sub>    | 50 mA           |                 |  |
|                         | LED reverse voltage     | V <sub>R</sub>    | 5 V             |                 |  |
|                         | Peak forward current    | I <sub>FP</sub>   | 1 A             |                 | f = 100 Hz, Duty factor = 0.1%   |
|                         | Power dissipation       | P <sub>in</sub>   | 75 mW           |                 |  |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    | 60 V            | 350 V           |  |
|                         | Continuous load current | I <sub>L</sub>    | 0.5 A (0.6 A)   | 0.12 A (0.14 A) | 0.1 A (0.13 A)<br>Peak AC, DC<br>( ): in case of using only 1a or 1b,<br>1 channel |
|                         | Peak load current       | I <sub>peak</sub> | 1.5 A           | 0.36 A          | 0.3 A<br>100 ms (1 shot), V <sub>L</sub> = DC                                      |
|                         | Power dissipation       | P <sub>out</sub>  | 800 mW          | 850 mW          |  |
| Total power dissipation | P <sub>T</sub>          |                   | 850 mW          |                 |  |
| I/O isolation voltage   | V <sub>iso</sub>        |                   | 5,000 V AC      |                 |  |
| Temperature limits      | Operating               | T <sub>opr</sub>  | -40°C to +85°C  | -40°F to +185°F | Non-condensing at low temperatures   |
|                         | Storage                 | T <sub>stg</sub>  | -40°C to +100°C | -40°F to +212°F |  |

# GE 1 Form A & 1 Form B (AQW61○EH)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol  | AQW612EH(A)                       | AQW610EH(A)                            | AQW614EH(A)                    | Condition                      |  |
|--------------------------|----------------------------------|---------|-----------------------------------|--|--------------------------------|--------------------------------|--|
| Input                    | LED operate current              | Typical | $I_{Fon}(N.O.)$                   | 1.4 mA                                 |                                | $I_L = \text{Max.}$            |  |
|                          |                                  | Maximum | $I_{Fon}(N.C.)$                   | 3.0 mA                                 |                                |                                |  |
| Input                    | LED reverse current              | Minimum | $I_{For}(N.O.)$                   | 0.4 mA                                 |                                | $I_L = \text{Max.}$            |  |
|                          |                                  | Typical | $I_{For}(N.C.)$                   | 1.3 mA                                 |                                |                                |  |
| Input                    | LED dropout voltage              | Typical | $V_F$                             | 1.25 (1.14 V at $I_F = 5 \text{ mA}$ ) |                                | $I_F = 50 \text{ mA}$          |  |
|                          |                                  | Maximum |                                   | 1.5 V                                  |                                |                                |  |
| Output                   | On resistance                    | Typical | $R_{on}$                          | 1Ω                                     | 18Ω                            | 26Ω                            | $I_F = 5 \text{ mA} (\text{N.O.}) I_F = 0 \text{ mA} (\text{N.C.})$<br>$I_L = \text{Max.}$<br>Within 1 s on time |
|                          |                                  | Maximum |                                   | 2.5Ω                                   | 25Ω                            | 35Ω                            |  |
| Output                   | Off state leakage current        | Maximum | $I_{Leak}$                        | 1μA (N.O.), 10μA (N.C.)                |                                |                                | $I_F = 0 \text{ mA} (\text{N.O.}) I_F = 5 \text{ mA} (\text{N.C.})$<br>$V_L = \text{Max.}$                       |
|                          |                                  |         |                                   |  |                                |                                |  |
| Transfer characteristics | Operate time*                    | Typical | $T_{on}(N.O.)$<br>$T_{off}(N.C.)$ | 1.0 ms (N.O.)<br>3.0 ms (N.C.)         | 0.5 ms (N.O.)<br>1.0 ms (N.C.) | 0.5 ms (N.O.)<br>0.8 ms (N.C.) | $I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$<br>$I_L = \text{Max.}$   |
|                          |                                  | Maximum |                                   | 4.0 ms (N.O.)<br>10.0 ms (N.C.)        | 3.0 ms                         |                                |  |
|                          | Reverse time*                    | Typical | $T_{off}(N.O.)$<br>$T_{on}(N.C.)$ | 0.05ms (N.O.),<br>0.2ms (N.C.)         | 0.08ms (N.O.),<br>0.3ms (N.C.) | 0.08ms (N.O.),<br>0.2ms (N.C.) | $I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$<br>$I_L = \text{Max.}$   |
|                          |                                  | Maximum |                                   | 1.0ms                                  |                                |                                |  |
|                          | I/O capacitance                  | Typical | $C_{iso}$                         | 0.8 pF                                 |                                |                                | $f = 1 \text{ MHz}$<br>$V_B = 0 \text{ V}$   |
|                          |                                  | Maximum |                                   | 1.5 pF                                 |                                |                                |  |
|                          | Initial I/O isolation resistance | Minimum | $R_{iso}$                         | 1,000MΩ                                |                                |                                | 500 V DC   |

\*Operate/Reverse time

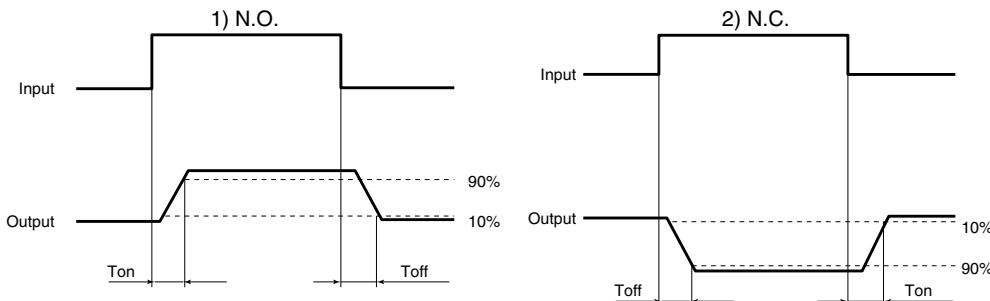

## RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

| Item              | Symbol | Recommended value | Unit |
|-------------------|--------|-------------------|------|
| Input LED current | $I_F$  | 5 to 10           | mA   |


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

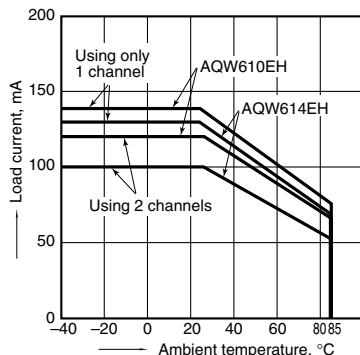


1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

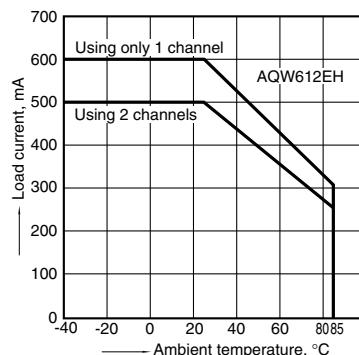


2-(1). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC)  
Continuous load current: Max. (DC)

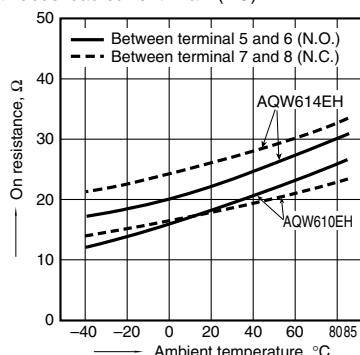


## 2-(2). On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

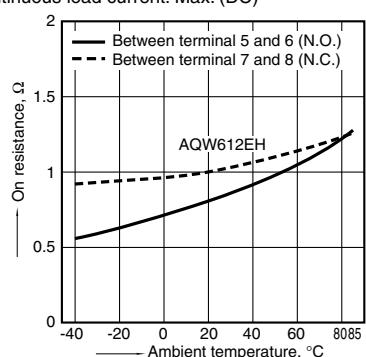


## 3. Operate time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

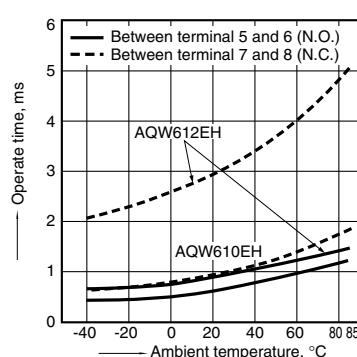


## 4. Reverse time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

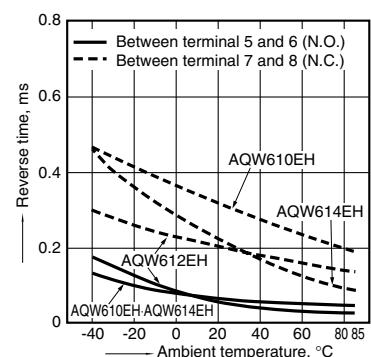


## 5. LED operate current vs. ambient temperature characteristics

Sample: All types;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

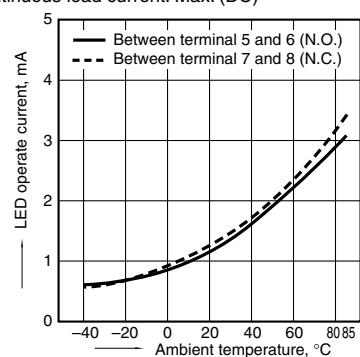


## 6. LED reverse current vs. ambient temperature characteristics

Sample: All types;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

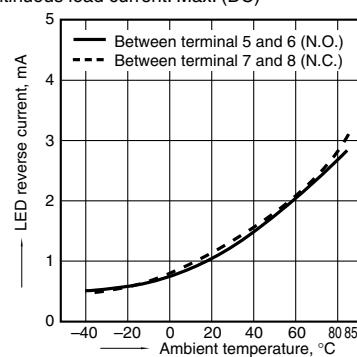


## 7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types;  
LED current: 5 to 50 mA

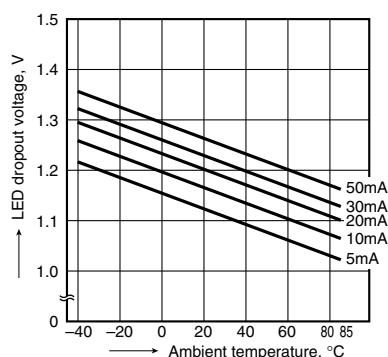


## 8-(1). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

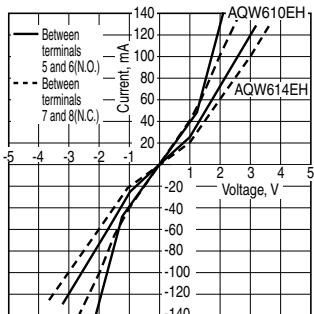


## 8-(2). Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

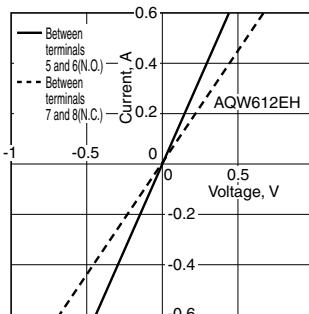


## 9-(1). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

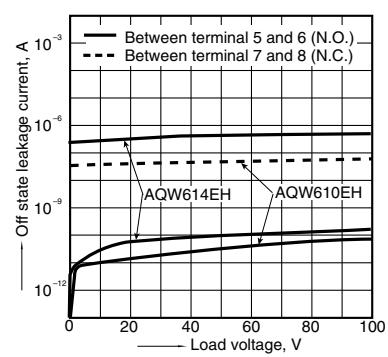


## 9-(2). Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Ambient temperature: 25°C 77°F

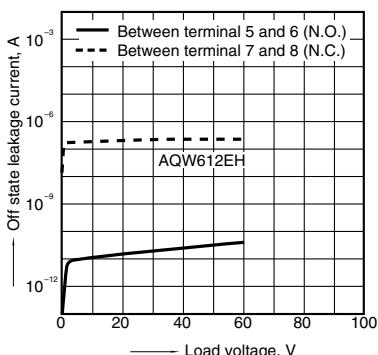


## 10-(1). Operate time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

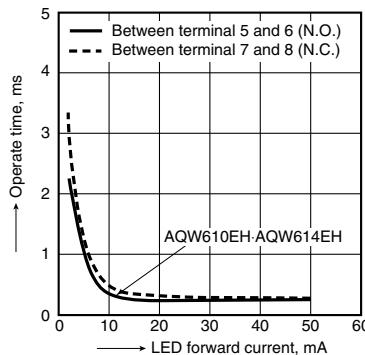

## 10-(2). Operate time vs. LED forward current characteristics


Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

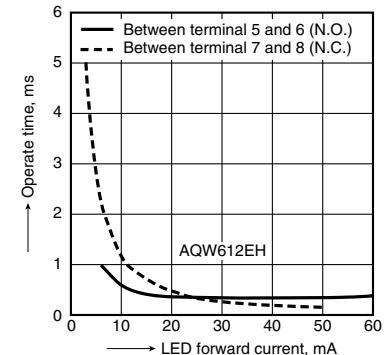

# GE 1 Form A & 1 Form B (AQW61○EH)

## 11-(1). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current:  
Max. (DC); Ambient temperature: 25°C 77°F

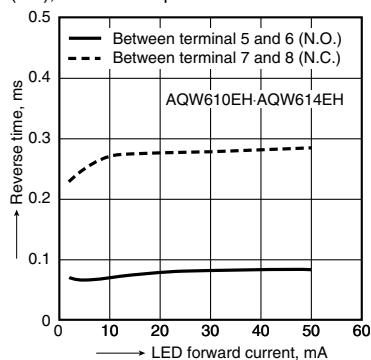


## 11-(2). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

## 11-(2). Reverse time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Load voltage: Max. (DC); Continuous load current:  
Max. (DC); Ambient temperature: 25°C 77°F

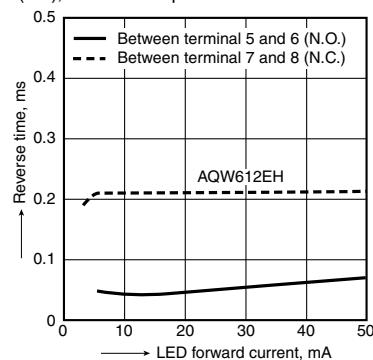

## 12-(1). Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8;  
Frequency: 1 MHz;  
Ambient temperature: 25°C 77°F

