


AS-Interface CompactLine module

CompactM12 4DI no IR

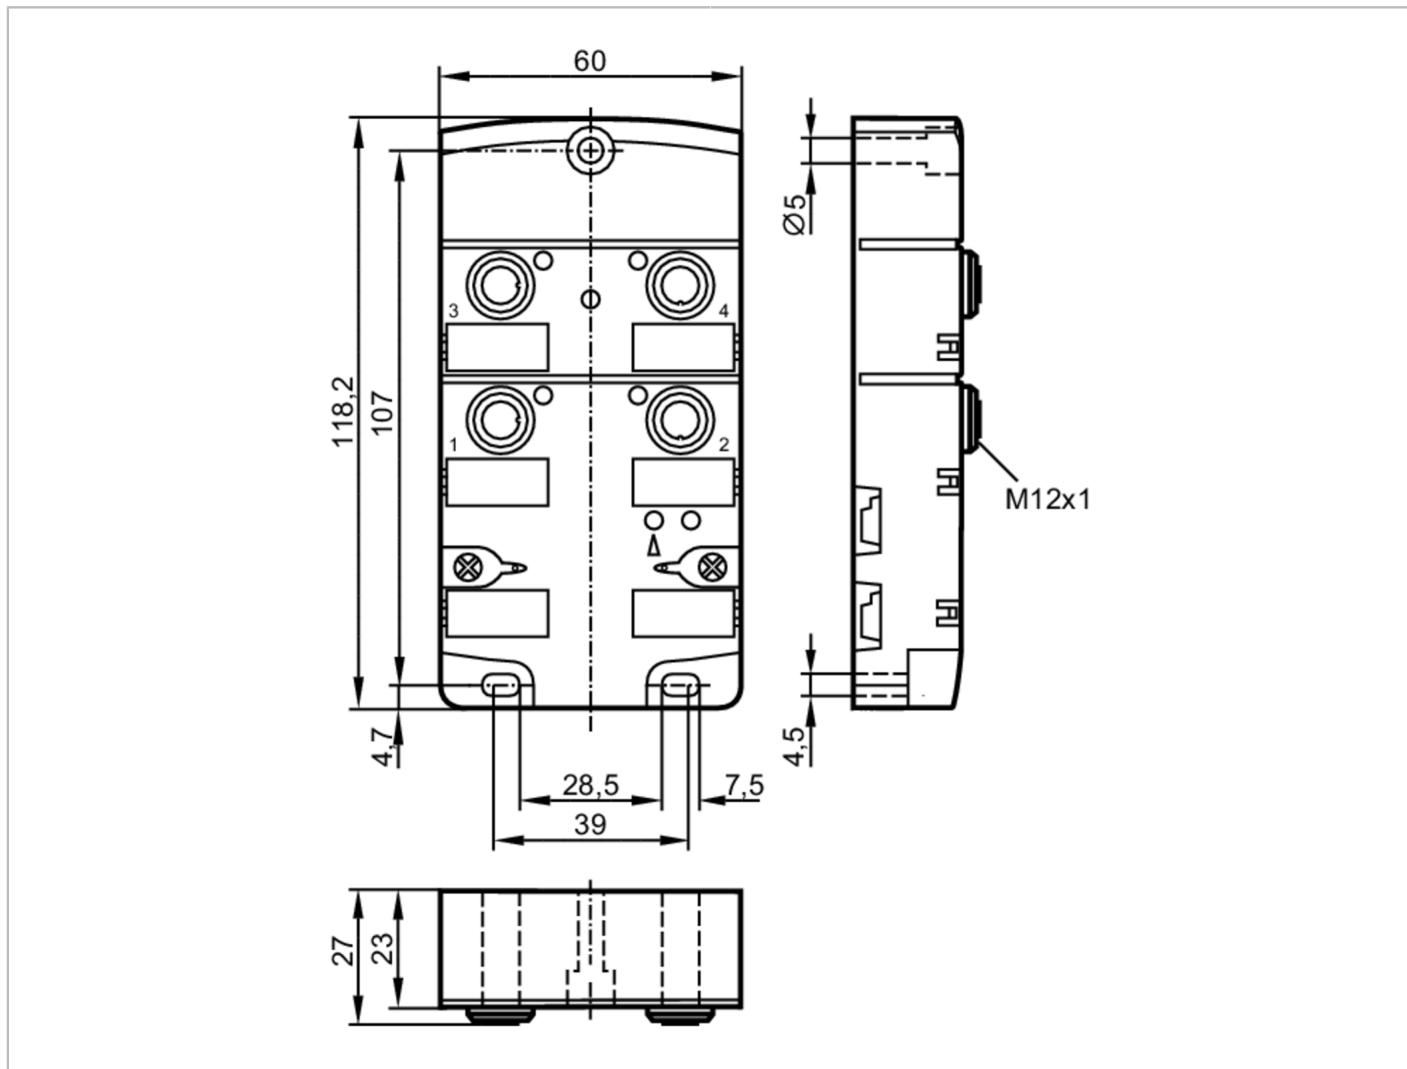

Electrical data

| | | |
|------------------------------------|------|---------------------------------------------|
| Operating voltage | [V] | 26.5...31.6 DC; ("supply class 2" to cULus) |
| Max. current consumption from AS-i | [mA] | 250 |

Inputs / outputs

| | |
|------------------------------|-----------------------------|
| Number of inputs and outputs | Number of digital inputs: 4 |
|------------------------------|-----------------------------|

AC2434

AS-Interface CompactLine module

CompactM12 4DI no IR



| Inputs | | | | | |
|-------------------------------------------------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------|
| Number of digital inputs | | 4 | | | |
| Input circuit of digital inputs | | PNP | | | |
| Sensor supply of the inputs | | AS-i | | | |
| Voltage supply [V] | | 20...30 | | | |
| Max. total current rating of inputs [mA] | | 200 | | | |
| Input current limitation [mA] | | 15 | | | |
| Input current High [mA] | | 6...10 | | | |
| Input current Low [mA] | | 0...2 | | | |
| Min. switching level high signal [V] | | 11 | | | |
| Digital inputs protected against short circuits | | yes | | | |
| Outputs | | | | | |
| Electrical design | | AS-i | | | |
| Operating conditions | | | | | |
| Ambient temperature [°C] | | -25...80 | | | |
| Protection | | IP 67; (when flat cables are used E7400x / E7401x) | | | |
| Tests / approvals | | | | | |
| EMC | | EN 61000-6-2 EN 61000-6-3 EN 62026-2 | | | |
| AS-i classification | | | | | |
| AS-i version | | 2.11 + 3.0 | | | |
| Extended addressing mode possible | | no | | | |
| AS-i profile | | S-0.0.E | | | |
| AS-i I/O configuration [hex] | | 0 | | | |
| AS-i ID code [hex] | | 0.E | | | |
| Assignment of the data bits | data bit input socket pin | D0 1 I-1 2+4 | D1 2 I-2 2+4 | D2 3 I-3 2+4 | D3 4 I-4 2+4 |
| Mechanical data | | | | | |
| Weight [g] | | 298 | | | |
| Type of mounting | | AS-i flat cables directly connectable | | | |
| Materials | | PA; socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: Viton; piercing contacts: CuSn6 nickel-plated and tin-plated | | | |
| Displays / operating elements | | | | | |
| Display | operation errors function | LED, green LED, red LED, yellow | | | |
| Accessories | | | | | |
| Accessories (supplied) | | stainless steel sleeve for installation in case of high mechanical stress , E70402 | | | |

AC2434



AS-Interface CompactLine module

CompactM12 4DI no IR

Remarks

| | |
|---------------|------------------------------------------------------------------------------------------------|
| Remarks | Do not connect any of the following points to an external potential: I-, I+, I1, I2, I3, I4 |
| Pack quantity | The connections are electrically connected with the AS-i cable. 1 pcs. |

Electrical connection

| Inputs | |
|--------|---------------------------------|
| 1 | Sensor supply L+ |
| 2+4 | data input 1 internally bridged |
| 3 | Sensor supply L- |
| 5 | functional earth |

Connector: M12

