




Non-split sleeve core


Material

- Ferrite Core : Soft ferrite

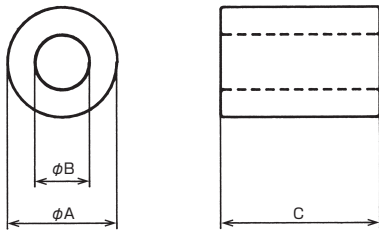

Part No.	φ A	φ B	C	Impedance*Ω/100MHz (1turn)
GRI-3-4-1	3	1	4	≧ 25
GRI-3.5-3.5-1.2	3.5	1.2	3.5	≧ 25
GRI-3.5-7-1.2	3.5	1.2	7	≧ 40
GRI-4-5-1.5	4	1.5	5	≧ 30
GRI-11-18-5	11	5	18.5	≧ 85
GRI-11-20-5	11	5	20	≧ 90
GRI-11-25-5	11	5	25	≧ 105
GRI-12-16-8.5	12	8.5	16	≧ 35
GRI-12-3-20-7	12.3	7	20	≧ 70
GRI-14-28-6	14.3	6.3	28.6	≧ 130
GRI-16-20-7	16	7	20	≧ 95
GRI-16-28-7	16	7	28	≧ 130
GRI-16-28-8	16	8	28	≧ 115
GRI-16-28-9	16	9	28	≧ 95
GRI-17.5-28.5-10.7	17.5	10.7	28.5	≧ 85
GRI-18-28-10	18	10	28	≧ 100
GRI-26-28-13	26	13	28	≧ 120

Impedance vs frequency

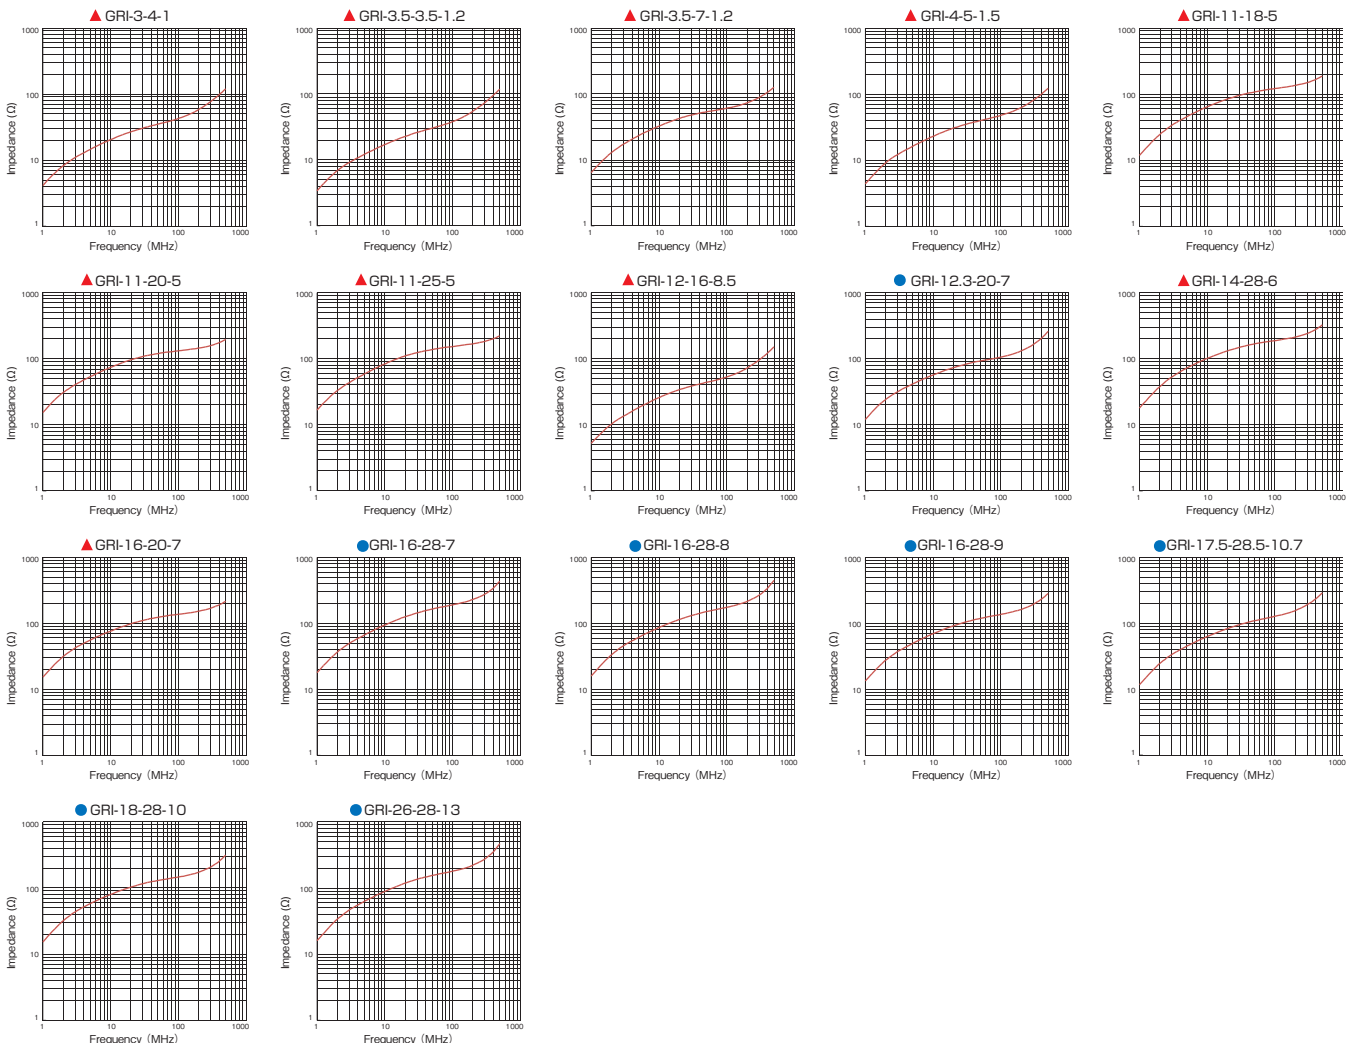


▲	Wire:UEW φ0.5 mm / Length 50 mm / 1 Turn
●	Wire:UEW φ0.5 mm / Length 70 mm / 1 Turn
■	Wire:UEW φ0.5 mm / Length 120 mm / 1 Turn


RF Impedance Material Analyzer Agilent E4991A

● All specifications and characteristics shown herein are typical values, but are not guaranteed.
 All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.


GRI-3.5-3.5-1.2

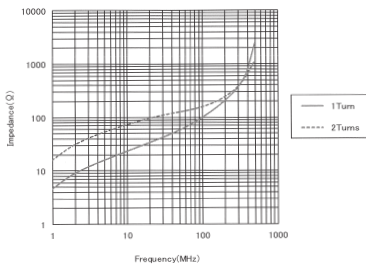


GRI-3.5-7-1.2




GRI-4-5-1.5

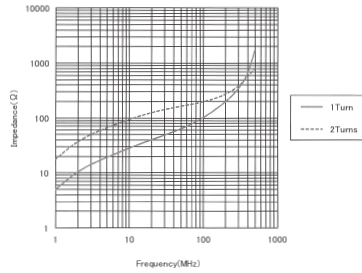


GRI-11-18-5

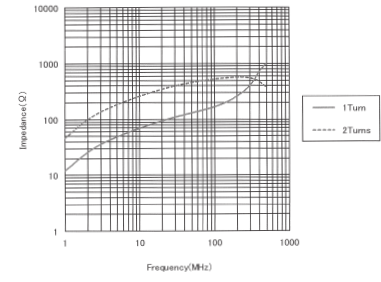


GRI-11-20-5

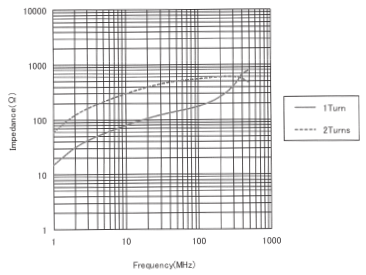


GRI-11-25-5

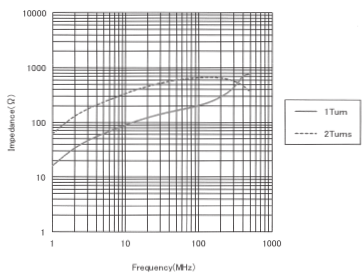


GRI-12-16-8.5

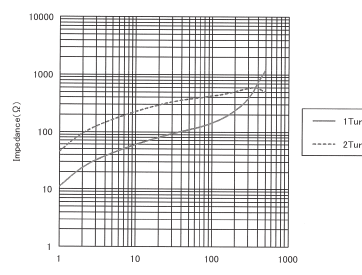


GRI-12.3-20-7

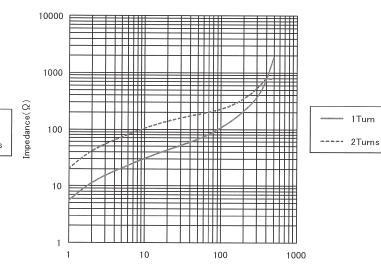


GRI-14-28-6

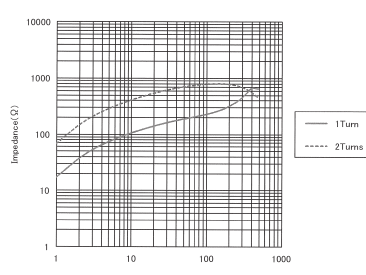


GRI-16-20-7




GRI-16-28-7

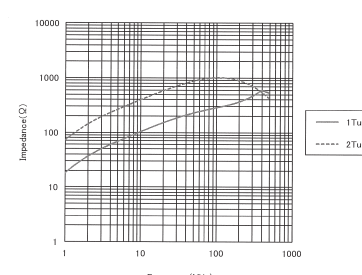


GRI-16-28-8

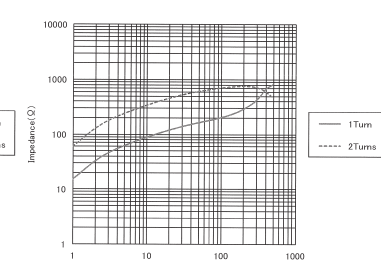


GRI-16-28-9

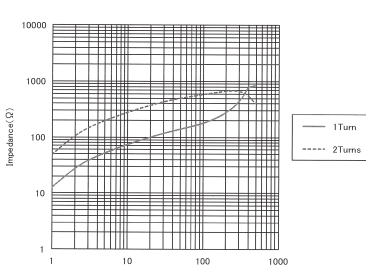


GRI-17.5-28.5-10.7

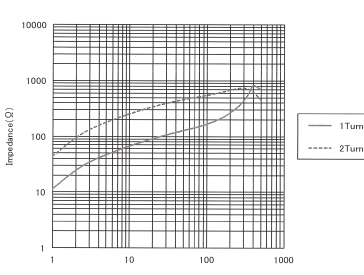

GRI-18-28-10

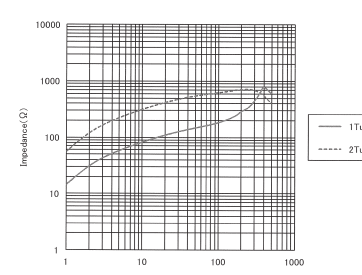

GRI-26-28-13

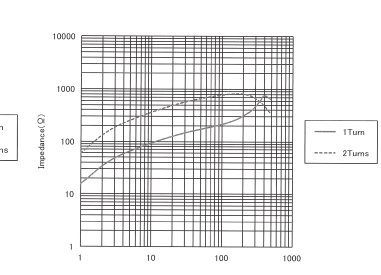

Test condition

Wire: AWG26φ0.5mm / Length 165 mm / 1 Turn / 2 Turns

RF Impedance Material Analyzer Agilent E4991A

● All specifications and characteristics shown herein are typical values, but are not guaranteed.
All specifications and characteristics shown herein are subject to change without notice for improvements or changes in specification.