

MHLL6060-300

UNCONTROLLED DOCUMENT



PHYSICAL DIMENSIONS:

- A 60.0[2.362] \pm 1.50[.059]
- B 60.0[2.362] \pm 1.50[.059]
- C 0.05[.002] \pm 0.01[.0004]
- D 0.09[.004] MAX



ELECTRICAL CHARACTERISTICS:	
Initial Permeability(u') (13.56MHz)	130 \pm 20%
Initial Permeability(u'') (13.56MHz)	5 Max

PRODUCTS SHAPE AND DIMENSIONS

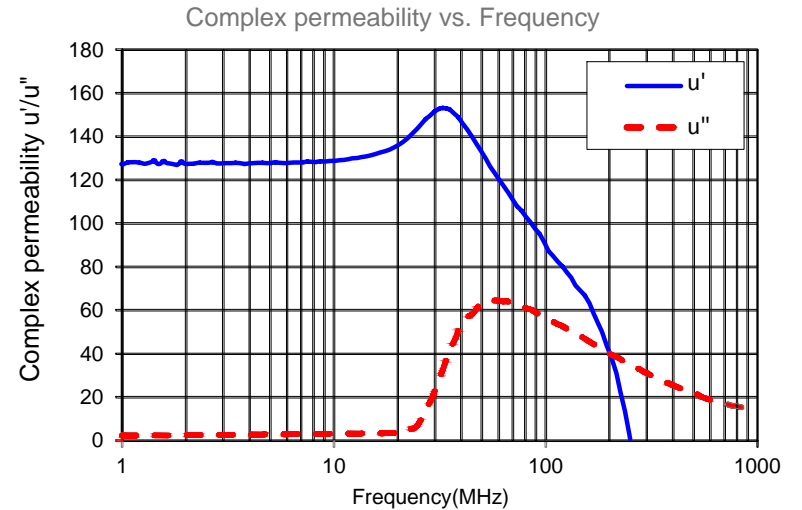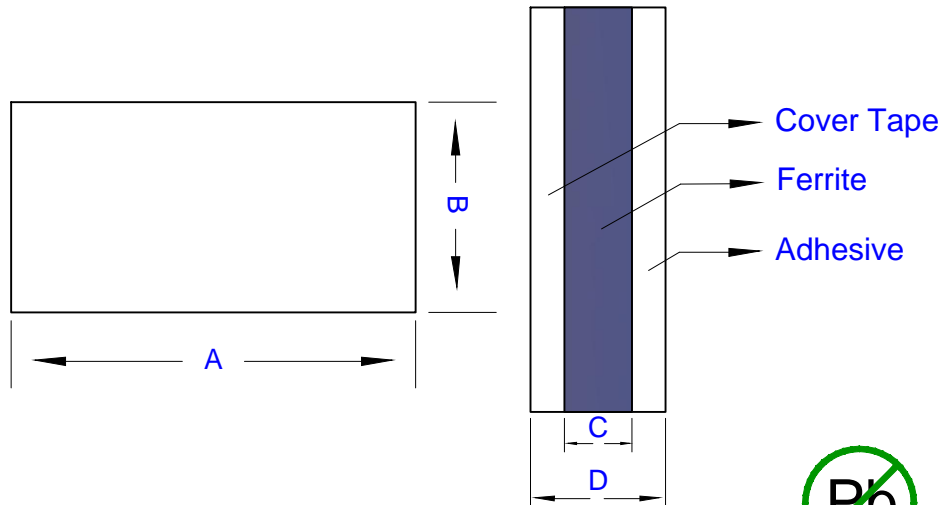

MEASURED BY ANGILENT E4991A , 1Ts .

NOTES: UNLESS OTHERWISE SPECIFIED

1. OPERATING TEMPERATURE RANGE -40°C TO 85°C .
2. FLEXIBLE FERRITE SHEET.
3. D IS MEASURED AFTER REMOVING PAPER LINER OF ADHESIVE

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
				Laird	
PROJECT/PART NUMBER:				REV	PART TYPE:
MHLL6060-300				C	CO-FIRE
DATE:				SCALE:	SHEET:
12/30/13				NTS	1 of 1
CAD #				TOOL #	
MHL6060-300-C				-	
REV	DESCRIPTION	DATE	INT		
C	UPDATE U' SPEC AND PERM CURVE	06/24/14	QIU		
B	CHANGE D FROM 0.10	03/06/14	QIU		
A	ORIGINAL DRAFT	12/30/13	QIU		