



Speed Controller with Indicator New


Numerical indication of handle rotation for flow rate

RoHS

reduces flow setting time and setting errors!

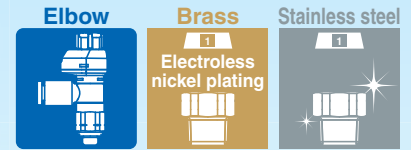


| Indicator window | Body size 1 | | Body size 2 or larger | |
|---|------------------|----------------------------|-----------------------|----------------------------|
| | Indicator window | Number of needle rotations | Indicator window | Number of needle rotations |
|  | 1 | 1 | 1 | 1 |
| | 2 | 2 | 2 | 2 |
| | ⋮ | ⋮ | ⋮ | ⋮ |
| | ⋮ | ⋮ | ⋮ | ⋮ |
| | 8 | 8 | 10 | 10 |

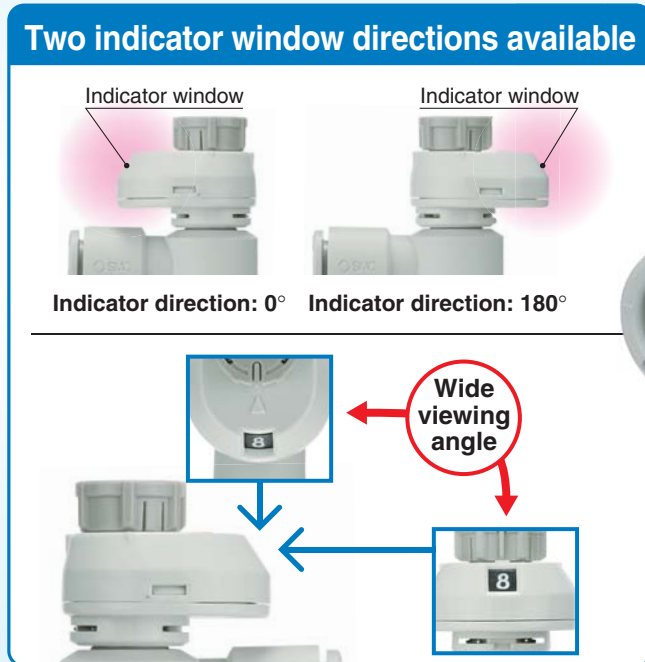


Larger push-lock type handle

Easy to lock


Locked



Unlocked



Easy to operate with the larger handle and marking every 90° mark



| Body size | øD (mm) |
|-----------|--|
| 1 | 9.4 |
| 2 | 12 (Port size 1/8) 13 (Port size 1/4) |
| 3 | 16.6 |
| 4 | 18.8 |



New types added!



Made to Order added

- Vaseline/-X12
- Grease-free + Restrictor/-X21
- Restrictor/-X214
- Clean Series/10-


Series AS-FS

Flow rate reproducibility







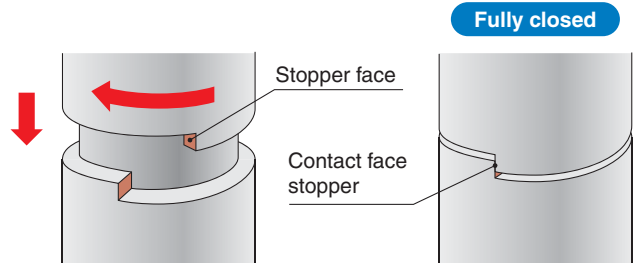





Improved reproducibility of flow rate



Stable handle position when fully closed (no flow rate) onto the contact face stopper (rotating stopper). Small variations in flow rate depending on the number of handle rotations



Easy identification of product type

| Series | Release button color | | | |
|--|---|---|--|---|
| | Meter-out | Meter-in | Metric | Inch |
|  AS-FS AS-FS-U□ | Gray  | Light blue  | Light gray  | Orange  |
|  AS-FSG | Gray  | Light blue  | White  | White  |





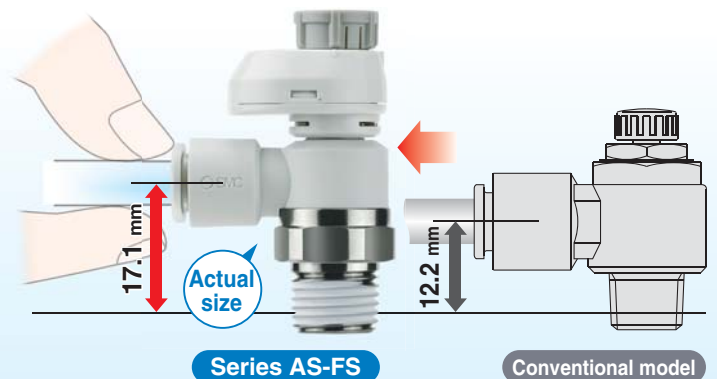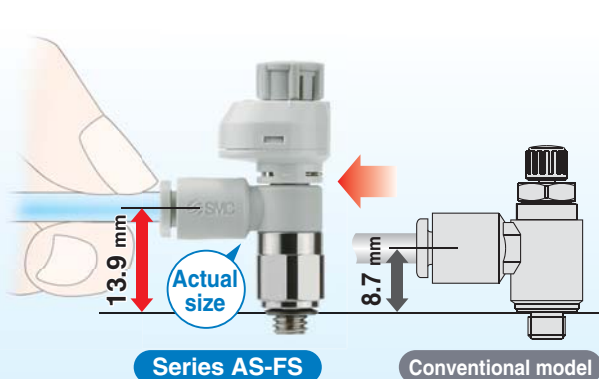



Easier to insert and remove the tube!



| Tubing diameter | Thread | Model | Model |
|-----------------|--------|-----------------|---------------|
| ø4 | M5 | AS12□1FS-M5□-04 | AS12□1F-M5-04 |

| Tubing diameter | Thread | Model | Model |
|-----------------|--------|-----------------|---------------|
| ø6 | 1/4 | AS22□1FS-02-06S | AS22□1F-02-06 |

Series Variations


| | Seal method | Body size | Port size | Applicable tubing O.D. | | | | | | | | | | | | Metal parts material | Applicable tubing material | | | | | | |
|---|---|-----------|-----------|------------------------|-----|---|---|---|----|-----------|----|------|-------|------|-------|----------------------|----------------------------|------|------|---|--|--|--|
| | | | | Metric size | | | | | | Inch size | | | | | | | | | | | | | |
| | | | | 2 | 3.2 | 4 | 6 | 8 | 10 | 12 | 16 | 1/8" | 5/32" | 1/4" | 5/16" | | | 3/8" | 1/2" | | | | |
|  |  | 1 | M5 x 0.8 | • | • | • | • | | | | | • | • | • | | | | | | | | | |
| | | | 10-32UNF | • | • | • | • | | | | | • | • | • | | | | | | | | | |
|  |  | 2 | R | 1/8 | • | • | • | • | • | | | | • | • | • | | | | | | | | |
| | | | R | 1/4 | • | • | • | • | • | | | • | • | • | • | • | | | | | | | |
| | | 3 | NPT | 1/4 | | | • | • | • | • | • | | | • | • | • | • | | | | | | |
| | | | NPT | 3/8 | | | • | • | • | • | • | | | • | • | • | • | | | | | | |
| 4 | 1/2 | | | | | • | • | • | • | | • | | | | • | • | | | • | • | | | |
|  |  | 2 | G*1 | 1/8 | • | • | • | • | • | | | | • | • | • | • | | | | | | | |
| | | | | 1/4 | • | • | • | • | • | | | | • | • | • | • | | | | | | | |
| | | 3 | | 1/4 | | | • | • | • | • | • | | | | | | | | | | | | |
| | | | | 3/8 | | | • | • | • | • | • | | | | | | | | | | | | |
| 4 | 1/2 | | | | | • | • | • | • | | • | | | | | | | | | | | | |
|  |  | 2 | Uni | 1/8 | • | • | • | • | • | | | | • | • | • | • | | | | | | | |
| | | | | 1/4 | • | • | • | • | • | | | | • | • | • | • | • | | | | | | |
| | | 3 | | 1/4 | | | • | • | • | • | • | | | | | | • | • | • | • | | | |
| | | | | 3/8 | | | • | • | • | • | • | | | | | | • | • | • | • | | | |
| 4 | 1/2 | | | | | • | • | • | • | | • | | | | | | | | • | • | | | |

*1 Face seal type is applicable only to the G thread type. *2 "Without sealant" type can be selected as a standard option.

- ⊙ Electroless nickel plating type is standardized.
- ⊙ Stainless steel type is standardized.
- ⊙ G thread (Face seal) type is standardized.



Speed Controller with Indicator/ Elbow Type Series AS-FS



Model

| Model | Port size | Seal method | Applicable tubing O.D. | | | | | | | | | | Note 3) Max. number of rotations | | | | |
|-------------------|-----------|--------------------|------------------------|-----|---|---|---|-----------|----|----|------|-------|---|-------|------|------|---|
| | | | Metric size | | | | | Inch size | | | | | | | | | |
| Elbow type | | | 2 ^{Note 2)} | 3.2 | 4 | 6 | 8 | 10 | 12 | 16 | 1/8" | 5/32" | 1/4" | 5/16" | 3/8" | 1/2" | |
| AS12□1FS□-M5□ | M5 x 0.8 | Gasket seal | ● | ● | ● | ● | | | | | ● | ● | ● | | | | |
| AS12□1FS□-U10/32□ | 10-32UNF | | ● | ● | ● | ● | | | | | ● | ● | ● | | | | |
| AS22□1FS□-□01 | R NPT | Note 1) Sealant | | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | | | |
| AS22□1FS□-□02 | | | 1/8 | | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | ● | |
| AS32□1FS□-□02 | | | 1/4 | | ● | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | ● |
| AS32□1FS□-□03 | | | 3/8 | | | | ● | ● | ● | ● | | | ● | ● | ● | ● | ● |
| AS42□1FS□-□04 | | | 1/2 | | | | | | | ● | ● | ● | | | | ● | ● |
| AS22□1FS□-G01 | G | Face seal | | ● | ● | ● | ● | ● | | | | | | | | | |
| AS22□1FS□-G02 | | | 1/8 | | ● | ● | ● | ● | ● | | | | | | | | |
| AS32□1FS□-G02 | | | 1/4 | | | | ● | ● | ● | ● | | | | | | | |
| AS32□1FS□-G03 | | | 3/8 | | | | ● | ● | ● | ● | | | | | | | |
| AS42□1FS□-G04 | | | 1/2 | | | | | | | ● | ● | ● | | | | | |


Note 1) "Without sealant" type can be selected as a standard option.

Note 2) Only polyurethane tubing is applicable for ø2.

Note 3) There are differences in actual rate as by the indicator window over the maximum number of rotations depending on the individual product.

Specifications

Flow Direction Symbol on Body



| | |
|--------------------------------------|---|
| Fluid | Air |
| Proof pressure | 1.5 MPa |
| Max. operating pressure | 1 MPa |
| Min. operating pressure | 0.1 MPa |
| Ambient and fluid temperature | -5 to 60°C (No freezing) |
| Applicable tubing material | Nylon, Soft nylon, Polyurethane ^{Note)} , FEP, PFA |

Note) Use caution at the max. operating pressure when using soft nylon or polyurethane tubing. (Refer to the WEB catalog or Best Pneumatics No. 6 for details.)

⚠ Caution

Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to "Handling Precautions for SMC Products" and the Operation Manual on SMC website, <http://www.smcworld.com>


Flow-rate and Sonic Conductance

| Model | AS12□1FS-M5□ | AS22□1FS-01 | | AS22□1FS-02 | | | AS32□1FS | | AS42□1FS | | | | | | |
|---|-----------------|-------------|--------------------------|-------------|--------|-----------------|----------|--------|----------|--------------------------|-------|--------|------------|-------|------------|
| Tubing O.D. | Metric size | ø2 | ø3.2 ø4 ø6 | ø3.2 | ø4 | ø6 ø8 ø10 | ø3.2 | ø4 | ø6 | ø8 ø10 | ø6 | ø8 | ø10 ø12 | ø10 | ø12 ø16 |
| | Inch size | — | ø1/8" ø1/4" ø5/32" | ø1/8" | ø5/32" | ø1/4" ø5/16" | ø1/8" | ø5/32" | — | ø1/4" ø5/16" ø3/8" | ø1/4" | ø5/16" | ø3/8" | ø3/8" | ø1/2" |
| C values: Sonic conductance dm ³ /(s·bar) | Free flow | 0.2 | 0.3 | 0.4 | 0.6 | 0.6 | 0.7 | 1.0 | 1.3 | 1.5 | 1.6 | 1.7 | 2.5 | 4.4 | 4.8 |
| | Controlled flow | 0.2 | 0.3 | 0.4 | 0.7 | 0.8 | 0.6 | 0.9 | 1.3 | 2.1 | 2.4 | 3.3 | 4.4 | 4.9 | |
| b values: Critical pressure ratio | Free flow | 0.3 | 0.4 | 0.2 | 0.3 | 0.3 | 0.3 | 0.4 | 0.4 | 0.3 | 0.3 | | | | |
| | Controlled flow | 0.2 | 0.2 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | 0.3 | | | | |

Note 1) 10-32UNF has the same specification as M5.

Note 2) C and b values are for controlled flow with the needle fully open and free flow with the needle fully closed.

Speed Controller with Indicator/Elbow Type *Series AS-FS*



How to Order



Width across flats (H)

| | |
|-----|------|
| E | 8 mm |
| Nil | 9 mm |

Body size

| | |
|---|----------------------|
| 1 | M5 x 0.8 10-32UNF |
|---|----------------------|

Port size

| | |
|--------|----------|
| M5 | M5 x 0.8 |
| U10/32 | 10-32UNF |

Applicable tubing O.D. ^{Note 1)}

| Metric size | | Inch size | |
|-------------|-------------------------|-----------|--------|
| 02 | ø2 | 01 | ø1/8" |
| 23 | ø3.2 ^{Note 2)} | 03 | ø5/32" |
| 04 | ø4 | 07 | ø1/4" |
| 06 | ø6 | | |

Note 1) For selecting applicable tubing O.D., refer to the "Model" on page 3.
Metric size and inch size types can be visually identified by color of the release button.
Metric size: Light gray
Inch size: Orange

Note 2) Use ø1/8" tube.

Body size 1

AS 1 2 0 1F S [] - M5 E - 06 - []

Body size 2/3/4

AS 2 2 0 1F S [] - [] 01 - 06 S - []

Body size

| | |
|---|----------|
| 2 | 1/8, 1/4 |
| 3 | 3/8 |
| 4 | 1/2 |

With indicator

Type

| | |
|---|-------|
| 2 | Elbow |
|---|-------|

Control type ^{Note)}

| | |
|---|-----------|
| 0 | Meter-out |
| 1 | Meter-in |

Note) Meter-out and meter-in types can be visually identified by color of the handle.
Meter-out: Gray
Meter-in: Light blue

Indicator direction

| | | |
|-----|------|--|
| Nil | 0° | |
| 1 | 180° | |

Note) Orientation of indicator direction is fixed when manufacturing, and cannot be changed by the user.

• **Made to Order**
Refer to page 10 for details.

Seal method

| | |
|-----|-----------------|
| Nil | Without sealant |
| S | With sealant |

Note) Face seal type is used for the G thread type.

Select "Nil/Without sealant".

Example) AS2201FS-G01-06

Applicable tubing O.D. ^{Note 1)}

| Metric size | | Inch size ^{Note 3)} | |
|-------------|-------------------------|------------------------------|--------|
| 23 | ø3.2 ^{Note 2)} | 01 | ø1/8" |
| 04 | ø4 | 03 | ø5/32" |
| 06 | ø6 | 07 | ø1/4" |
| 08 | ø8 | 09 | ø5/16" |
| 10 | ø10 | 11 | ø3/8" |
| 12 | ø12 | 13 | ø1/2" |
| 16 | ø16 | | |

Note 1) For selecting applicable tubing O.D., refer to the "Model" on page 3.

Note 2) Use ø1/8" tube.

Note 3) Only the metric size is available for the G thread type.

Port size

| | |
|----|-----|
| 01 | 1/8 |
| 02 | 1/4 |
| 03 | 3/8 |
| 04 | 1/2 |

Thread type

| | |
|-----|-----|
| Nil | R |
| N | NPT |
| G | G |

AS-FS


AS-FSG

Uni-AS-FS

Series AS-FS


Needle Valve/Flow-rate Characteristics

AS1201FS□-M5□, AS1211FS□-M5□

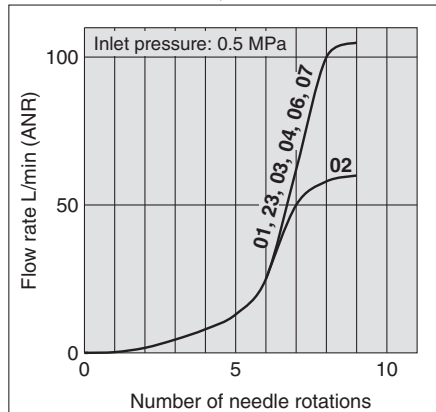


Note) -U10/32 has the same specification as M5.


AS2201FS□-01, AS2211FS□-01

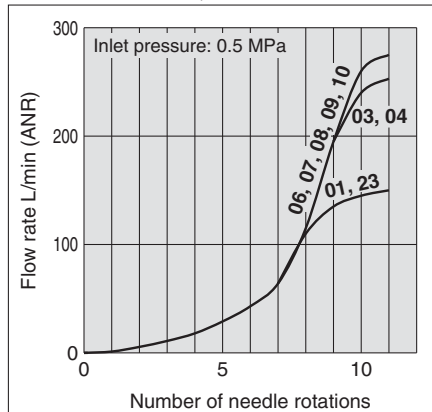


AS2201FS□-02, AS2211FS□-02

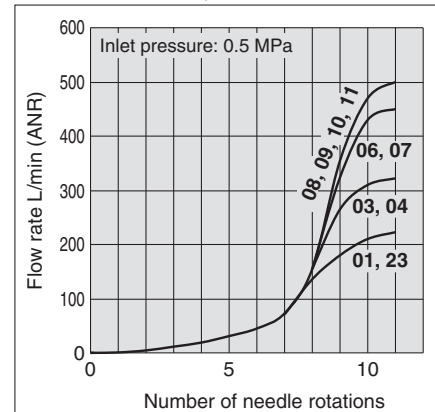

AS3201FS□, AS3211FS□

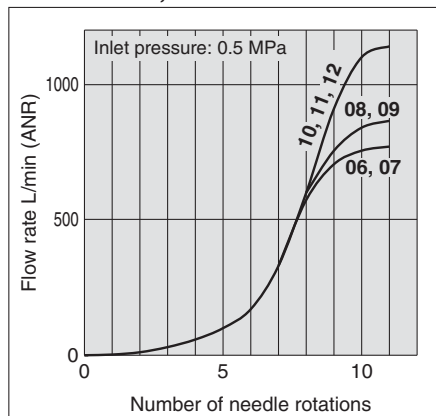


AS4201FS□, AS4211FS□

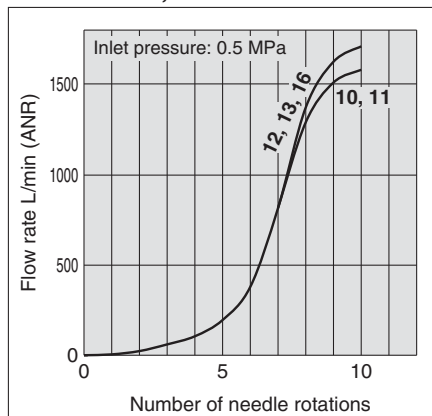

Note) The numbers above the flow-rate characteristic curves in the charts show the applicable tubing outside diameter as defined by the product number.


Construction

Seal method: Gasket seal
For M5, 10-32UNF

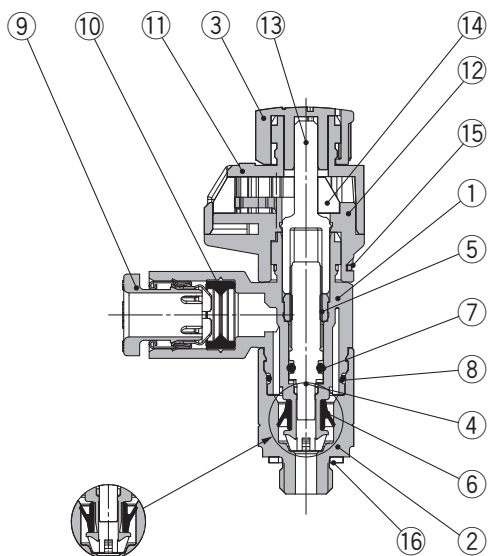


Meter-in type Meter-out type

Seal method: Sealant
For R, NPT thread

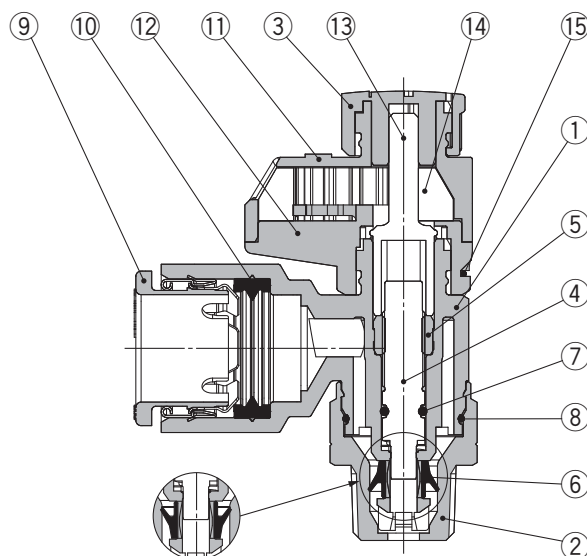

Meter-in type Meter-out type

Seal method: Face seal
For G thread

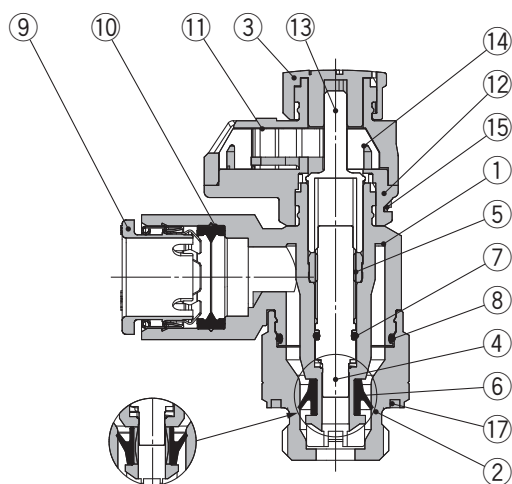

Meter-in type Meter-out type


Component Parts

| No. | Description | Material | Note |
|-----|----------------|---------------------|----------------------------|
| 1 | Body A | PBT | |
| 2 | Body B | Brass | Electroless nickel plating |
| 3 | Handle | POM | |
| 4 | Needle | PBT | |
| 5 | Needle guide | Brass | Electroless nickel plating |
| 6 | U seal | HNBR | |
| 7 | O-ring | NBR | |
| 8 | O-ring | NBR | |
| 9 | Cassette | — | |
| 10 | Seal | NBR | |
| 11 | Bonnet A | POM | |
| 12 | Bonnet B | POM | |
| 13 | Gear | POM | |
| 14 | Indicator gear | POM | |
| 15 | Clip | Stainless steel | |
| 16 | Gasket | NBR/Stainless steel | |
| 17 | Seal | NBR | |

Series AS-FS

Dimensions

Seal method: Gasket seal
For M5, 10-32UNF

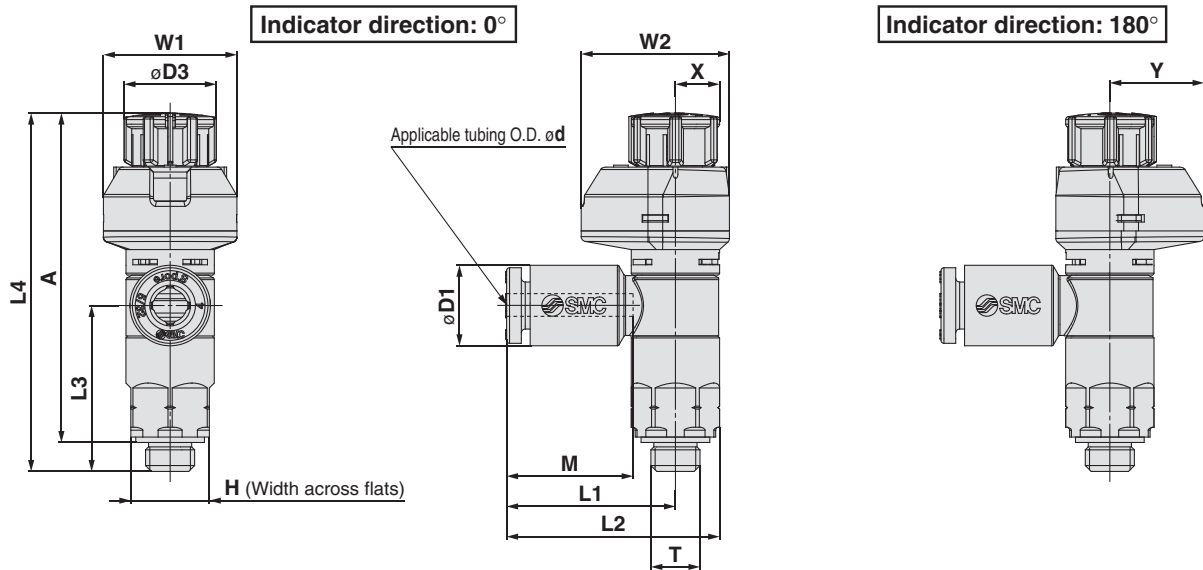

Metric Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g |
|----------------------|-----|----------------------|---|------|-----|------|------|------|------------|--------|-----------|--------|------|------|------|-----|-----|----------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | |
| AS12□1FS□-M5E-02 | 2 | M5 x 0.8 10/32UNF | 8 | 5.8 | 9.4 | 15.8 | 20.3 | 16.9 | 39 | 36.5 | 35 | 33.5 | 13.3 | 13.6 | 15.1 | 5.5 | 9.6 | 7 |
| AS12□1FS□-U10/32E-02 | | | | 7.2 | | | | | | | | | | | | | | |
| AS12□1FS□-M5E-23 | 3.2 | | | 8.2 | | | | | | | | | | | | | | |
| AS12□1FS□-U10/32E-23 | | | | 10.4 | | | | | | | | | | | | | | |
| AS12□1FS□-M5E-04 | 4 | | | 18.6 | | 23.1 | 16.5 | | | | | | | | | | | |
| AS12□1FS□-U10/32E-04 | 6 | | | | | | | | | | | | | | | | | |
| AS12□1FS□-M5E-06 | | | | | | | | | | | | | | | | | | |
| AS12□1FS□-U10/32E-06 | | | | | | | | | | | | | | | | | | |

Note 1) Reference dimensions

Note 2) Reference dimensions of threads after installation

Inch Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g |
|----------------------|-------|----------------------|---|------|-----|------|------|------|------------|--------|-----------|--------|------|------|------|-----|-----|----------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | |
| AS12□1FS□-M5E-01 | 1/8" | M5 x 0.8 10/32UNF | 8 | 7.2 | 9.4 | 17.2 | 21.7 | 16.9 | 39.0 | 36.5 | 35 | 33.5 | 13.3 | 13.6 | 15.1 | 5.5 | 9.6 | 7 |
| AS12□1FS□-U10/32E-01 | | | | 8.2 | | | | | | | | | | | | | | |
| AS12□1FS□-M5E-03 | 5/32" | | | 11.2 | | | | | | | | | | | | | | |
| AS12□1FS□-U10/32E-03 | | | | | | | | | | | | | | | | | | |
| AS12□1FS□-M5E-07 | 1/4" | | | | | | | | | | | | | | | | | |
| AS12□1FS□-U10/32E-07 | | | | | | | | | | | | | | | | | | |

Note 1) Reference dimensions

Note 2) Reference dimensions of threads after installation

Speed Controller with Indicator/Elbow Type *Series AS-FS*




Dimensions

Seal method: Sealant
For R, NPT thread

Indicator direction: 0°

Indicator direction: 180°

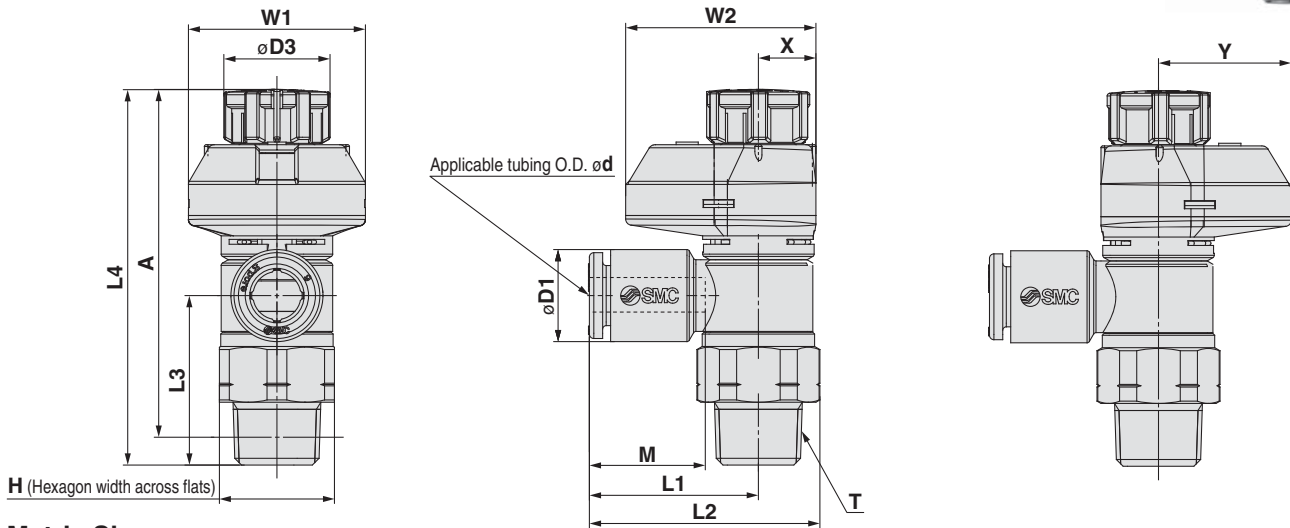

Metric Size

| Model | d | T (R, NPT) | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g |
|--------------------|-----|---------------|--------------|------|---------|------|-----------|-------------|------------|--------|-----------|--------|------|------|------|-----|------|-------------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | |
| AS22□1FS□-01-23(S) | 3.2 | 1/8 | 13 (12.7) | 7.2 | 12 | 19.1 | 26.1 (26) | 19.1 | 43.9 | 42.4 | 40.8 | 39.3 | 13.3 | 20 | 21.5 | 6.5 | 15 | 13 (13) |
| AS22□1FS□-01-04(S) | 4 | | | 8.2 | | | | | | | | | | | | | | 14 (13) |
| AS22□1FS□-01-06(S) | 6 | | | 10.4 | | | | | | | | | | | | | | 15 (14) |
| AS22□1FS□-01-08(S) | 8 | | | 13.2 | | | | | | | | | | | | | | 16 (15) |
| AS22□1FS□-01-10(S) | 10 | | | 15.9 | | | | | | | | | | | | | | 17 (16) |
| AS22□1FS□-02-23(S) | 3.2 | 1/4 | 17 (17.5) | 7.2 | 13 | 20.9 | 30 (30.3) | 22.6 | 49.7 | 48.3 | 44.2 | 42.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 23 (24) |
| AS22□1FS□-02-04(S) | 4 | | | 8.2 | | | | | | | | | | | | | | 24 (25) |
| AS22□1FS□-02-06(S) | 6 | | | 10.4 | | | | | | | | | | | | | | 25 (26) |
| AS22□1FS□-02-08(S) | 8 | | | 13.2 | | | | | | | | | | | | | | 26 (27) |
| AS22□1FS□-02-10(S) | 10 | | | 15.9 | | | | | | | | | | | | | | 27 (28) |
| AS32□1FS□-02-06(S) | 6 | 1/4 | 19 | 10.4 | 16.6 | 21.8 | 32.1 | 36.4 | 63.1 | 61.7 | 57.9 | 56.5 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 47 (48) |
| AS32□1FS□-02-08(S) | 8 | | | 13.2 | | | | | | | | | | | | | | 33 (34) |
| AS32□1FS□-02-10(S) | 10 | | | 15.9 | | | | | | | | | | | | | | 34 (35) |
| AS32□1FS□-02-12(S) | 12 | | | 18.5 | | | | | | | | | | | | | | 35 (36) |
| AS32□1FS□-03-06(S) | 6 | | | 3/8 | | | | | | | | | | | | | | 19 |
| AS32□1FS□-03-08(S) | 8 | 13.2 | 39 (40) | | | | | | | | | | | | | | | |
| AS32□1FS□-03-10(S) | 10 | 15.9 | 40 (41) | | | | | | | | | | | | | | | |
| AS32□1FS□-03-12(S) | 12 | 18.5 | 41 (42) | | | | | | | | | | | | | | | |
| AS42□1FS□-04-10(S) | 10 | 1/2 | 24 (23.8) | | 15.9 | 18.8 | 27.4 | 40.3 (40.2) | 36.2 | 64.1 | 62.5 | 57 | 55.4 | 15.6 | 26 | 29 | 10 | |
| AS42□1FS□-04-12(S) | 12 | | | 18.5 | 43 (43) | | | | | | | | | | | | | |
| AS42□1FS□-04-16(S) | 16 | | | 23.8 | 44 (44) | | | | | | | | | | | | | |

Note 1) Reference dimensions Note 2) Reference dimensions of threads after installation Note 3) () are the dimensions of NPT thread.

Inch Size


| Model | d | T (R, NPT) | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g | | | | | | | | | | | | | | | |
|--------------------|-------|---------------|--------------|------|------|------|-----------|-------------|------------|--------|-----------|--------|------|------|------|-----|------|--------------|------|------|------|-----------|------|------|------|------|------|------|------|------|-----|------|---------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-01-01(S) | 1/8" | 1/8 | 13 (12.7) | 7.2 | 12 | 19.1 | 26.1 (26) | 19.1 | 43.8 | 42.4 | 40.7 | 39.3 | 13.3 | 20 | 21.5 | 6.5 | 15 | 13 (13) | | | | | | | | | | | | | | | |
| AS22□1FS□-01-03(S) | 5/32" | | | 8.2 | | | | | | | | | | | | | | 14 (13) | | | | | | | | | | | | | | | |
| AS22□1FS□-01-07(S) | 1/4" | | | 11.2 | | | | | | | | | | | | | | 15 (14) | | | | | | | | | | | | | | | |
| AS22□1FS□-01-09(S) | 5/16" | | | 13.2 | | | | | | | | | | | | | | 16 (15) | | | | | | | | | | | | | | | |
| AS22□1FS□-02-01(S) | 1/8" | | | 1/4 | | | | | | | | | | | | | | 17 (17.5) | 7.2 | 13 | 20.9 | 30 (30.3) | 22.6 | 49.7 | 48.3 | 44.2 | 42.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 23 (24) |
| AS22□1FS□-02-03(S) | 5/32" | 8.2 | 24 (25) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-02-07(S) | 1/4" | 11.2 | 25 (26) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-02-09(S) | 5/16" | 13.2 | 26 (27) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-02-11(S) | 3/8" | 15.5 | 27 (28) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS32□1FS□-02-07(S) | 1/4" | 3/8 | 19 | 11.2 | 16.6 | 21.8 | 32.1 | 28.7 | 63.1 | 61.7 | 57.9 | 56.5 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 47 (48) | | | | | | | | | | | | | | | |
| AS32□1FS□-02-09(S) | 5/16" | | | 13.2 | | | | | | | | | | | | | | 33 (34) | | | | | | | | | | | | | | | |
| AS32□1FS□-02-11(S) | 3/8" | | | 15.5 | | | | | | | | | | | | | | 34 (35) | | | | | | | | | | | | | | | |
| AS32□1FS□-03-07(S) | 1/4" | | | 3/8 | | | | | | | | | | | | | | 19 | 11.2 | 16.6 | 21.8 | 32.1 | 28.7 | 55.4 | 54 | 50.2 | 48.8 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 38 (39) |
| AS32□1FS□-03-09(S) | 5/16" | | | | | | | | | | | | | | | | | | 13.2 | | | | | | | | | | | | | | 39 (40) |
| AS32□1FS□-03-11(S) | 3/8" | 15.5 | 40 (41) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS42□1FS□-04-11(S) | 3/8" | 1/2 | 24 (23.8) | | 15.5 | 18.8 | 27.4 | 40.3 (40.2) | 36.2 | 64.1 | 62.5 | 57 | 55.4 | 15.6 | 26 | 29 | 10 | | 19 | | | | | | | | | | | | | | 62 (61) |
| AS42□1FS□-04-13(S) | 1/2" | | | | 19.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | 43 (43) |

Note 1) Reference dimensions Note 2) Reference dimensions of threads after installation Note 3) () are the dimensions of NPT thread.

Series AS-FS

Dimensions

Seal method: Face seal
For G thread

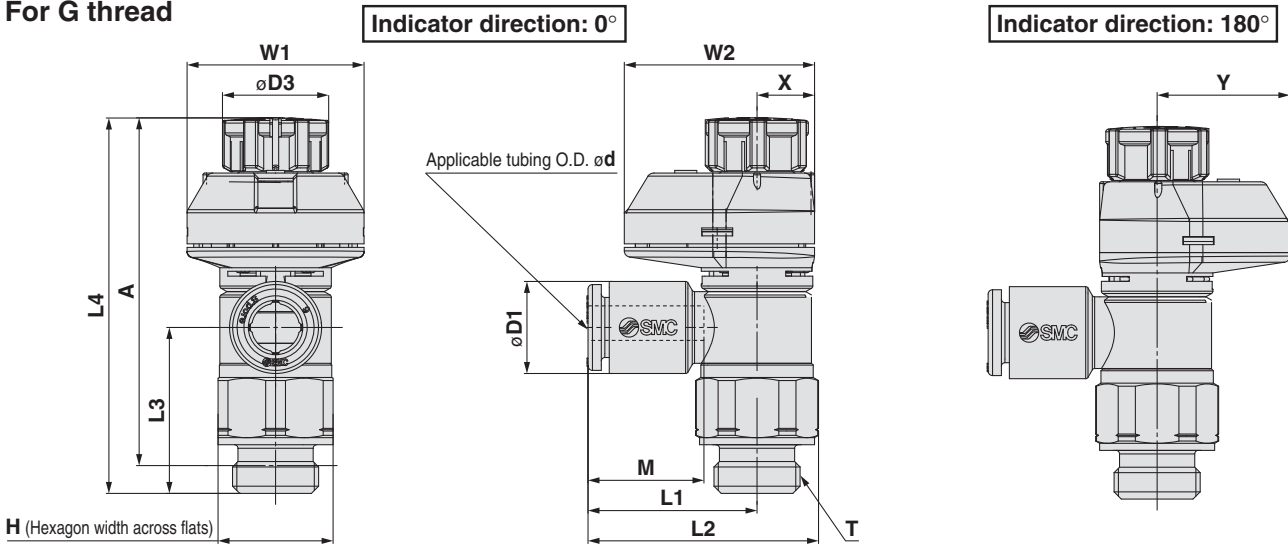

Metric Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g |
|------------------|-----|-----|----|------|------|------|------|------|------------|--------|-----------|--------|------|------|------|-----|------|----------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | |
| AS22□1FS□-G01-23 | 3.2 | 1/8 | 13 | 7.2 | 12 | 19.1 | 26.1 | 18.8 | 43.8 | 42.4 | 38.3 | 36.9 | 13.3 | 20 | 21.5 | 6.5 | 15 | 14 |
| AS22□1FS□-G01-04 | 4 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-G01-06 | 6 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-G01-08 | 8 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-G01-10 | 10 | 1/4 | 17 | 15.9 | 13 | 22.4 | 29.4 | 22.6 | 49.7 | 48.3 | 43.2 | 41.8 | 14.2 | 21.5 | 24 | 7.8 | 16.2 | 15 |
| AS22□1FS□-G02-23 | 3.2 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-G02-04 | 4 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-G02-06 | 6 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-G02-08 | 8 | 3/8 | 21 | 13.2 | 16.6 | 26.7 | 37.9 | 28 | 63.1 | 61.7 | 54.6 | 53.2 | 15.6 | 24.5 | 28.5 | 9.3 | 19.2 | 16 |
| AS22□1FS□-G02-10 | 10 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-G02-06 | 6 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-G02-08 | 8 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-G02-10 | 10 | 1/2 | 27 | 15.9 | 18.8 | 30.8 | 45.2 | 26.8 | 64.1 | 62.5 | 55.1 | 53.5 | 17 | 26 | 29 | 10 | 19 | 17 |
| AS32□1FS□-G03-06 | 6 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-G03-08 | 8 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-G03-10 | 10 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-G03-12 | 12 | 3/8 | 21 | 18.5 | 16.6 | 26.7 | 37.9 | 28 | 55.4 | 54 | 47.9 | 46.5 | 15.6 | 24.5 | 28.5 | 9.3 | 19.2 | 15 |
| AS42□1FS□-G04-10 | 10 | | | | | | | | | | | | | | | | | |
| AS42□1FS□-G04-12 | 12 | | | | | | | | | | | | | | | | | |
| AS42□1FS□-G04-16 | 16 | | | | | | | | | | | | | | | | | |


Note 1) Reference dimensions

Note 2) Reference dimensions of threads after installation


Series AS-FS

Made to Order

Please contact SMC for detailed dimensions, specifications and delivery.




1 Lubricant: Vaseline -X12



Example) AS2201FS-01-04S-X12


2 Grease-free (Seal: Fluorine-coated) + Restrictor (Without check valve) -X21



Example) AS2201FS-01-04S-X21

- Note 1) Not particle-free
- Note 2) The restrictor is only compatible with the part number of the meter-out type.
- Note 3) Only the needle and O-ring are fluorine-coated.


3 Restrictor (Without check valve) -X214



Example) AS2201FS-01-04S-X214

Note) The restrictor is only compatible with the part number of the meter-out type.

4 Clean Series 10-




Example) 10-AS2201FS-01-04S

- Note 1) Fluorine grease is used.
- Note 2) The particulate generation grade is 3.

AS-FS
AS-FSG
Uni-AS-FS

Speed Controller with Indicator/ Elbow Type: Stainless Steel Type Series AS-FSG



Model

| Model | Port size | Seal method | Applicable tubing O.D. | | | | | | | | | | | Note 3) Max. number of rotations | | | | |
|-------------------|-----------|--------------------|------------------------|-----|---|---|---|----|-----------|----|------|-------|------|---|------|------|----|---|
| | | | Metric size | | | | | | Inch size | | | | | | | | | |
| Elbow type | | | 2 Note 2) | 3.2 | 4 | 6 | 8 | 10 | 12 | 16 | 1/8" | 5/32" | 1/4" | 5/16" | 3/8" | 1/2" | | |
| AS12□1FSG□-M5 | M5 x 0.8 | Gasket seal | ● | ● | ● | ● | | | | | ● | ● | ● | | | | 8 | |
| AS12□1FSG□-U10/32 | 10-32UNF | | ● | ● | ● | ● | | | | | ● | ● | ● | | | | | |
| AS22□1FSG□-□01 | R NPT | Note 1) Sealant | | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | | | 10 | |
| AS22□1FSG□-□02 | | | 1/8 | | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | ● | | |
| AS32□1FSG□-□02 | | | 1/4 | | ● | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | | ● |
| AS32□1FSG□-□03 | | | 3/8 | | | | ● | ● | ● | ● | | | ● | ● | ● | ● | | ● |
| AS42□1FSG□-□04 | | | 1/2 | | | | | | | ● | ● | ● | | | | ● | | ● |
| AS22□1FSG□-G01 | G | Face seal | | ● | ● | ● | ● | ● | | | | | | | | | 10 | |
| AS22□1FSG□-G02 | | | 1/8 | | ● | ● | ● | ● | ● | | | | | | | | | |
| AS32□1FSG□-G02 | | | 1/4 | | | | ● | ● | ● | ● | | | | | | | | |
| AS32□1FSG□-G03 | | | 3/8 | | | | ● | ● | ● | ● | | | | | | | | |
| AS42□1FSG□-G04 | | | 1/2 | | | | | | | ● | ● | ● | | | | | | |


Note 1) "Without sealant" type can be selected as a standard option.

Note 2) Only polyurethane tubing is applicable for ø2.

Note 3) There are differences in actual rate as by the indicator window over the maximum number of rotations depending on the individual product.

Specifications

Flow Direction Symbol on Body



| | |
|-------------------------------|---|
| Fluid | Air |
| Proof pressure | 1.5 MPa |
| Max. operating pressure | 1 MPa |
| Min. operating pressure | 0.1 MPa |
| Ambient and fluid temperature | -5 to 60°C (No freezing) |
| Applicable tubing material | Nylon, Soft nylon, Polyurethane ^{Note)} , FEP, PFA |

Note) Use caution at the max. operating pressure when using soft nylon or polyurethane tubing. (Refer to the WEB catalog or Best Pneumatics No. 6 for details.)

Flow-rate and Sonic Conductance

⚠ Caution


Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to "Handling Precautions for SMC Products" and the Operation Manual on SMC website, <http://www.smcworld.com>

| Model | AS12□1FSG□-M5 | AS22□1FSG□-01 | AS22□1FSG□-02 | AS32□1FSG□ | AS42□1FSG□ |
|---|-----------------|-------------------------------|------------------------------------|--|---|
| Tubing O.D. | Metric size | ø2 ø3.2 ø4 ø6 | ø3.2 ø4 ø6 ø8 ø10 | ø3.2 ø4 ø6 ø8 ø10 | ø6 ø8 ø10 ø12 ø10 ø12 ø16 |
| | Inch size | — ø1/8" ø1/4" ø5/32" | ø1/8" ø5/32" ø1/4" ø5/16" | ø1/8" ø5/32" — ø1/4" ø5/16" ø3/8" | ø1/4" ø5/16" ø3/8" ø3/8" ø1/2" |
| C values: Sonic conductance dm ³ /(s·bar) | Free flow | 0.2 0.3 | 0.4 0.6 0.6 | 0.7 1.0 1.3 1.5 | 1.6 1.7 2.5 4.4 4.8 |
| | Controlled flow | 0.2 0.3 | 0.4 0.7 0.8 | 0.6 0.9 1.3 | 2.1 2.4 3.3 4.4 4.9 |
| b values: Critical pressure ratio | Free flow | 0.3 0.4 | 0.2 0.3 | 0.3 0.4 | 0.4 0.3 0.3 |
| | Controlled flow | 0.2 | 0.2 0.3 | 0.3 | 0.3 0.3 |

Note 1) 10-32UNF has the same specification as M5.

Note 2) C and b values are for controlled flow with the needle fully open and free flow with the needle fully closed.

Speed Controller with Indicator/Elbow Type Stainless Steel Type **Series AS-FSG**




How to Order



Applicable tubing O.D. Note 1)

| Metric size | | Inch size | |
|-------------|-----------------------------|-----------|--------|
| 02 | ø2 | 01 | ø1/8" |
| 23 | ø3.2 <small>Note 2)</small> | 03 | ø5/32" |
| 04 | ø4 | 07 | ø1/4" |
| 06 | ø6 | | |

Note 1) For selecting applicable tubing O.D., refer to the "Model" on page 11.
Metric size and inch size types can be visually identified by color of the release button.
Stainless steel type: White
White is also used for inch size.
Note 2) Use ø1/8" tube.

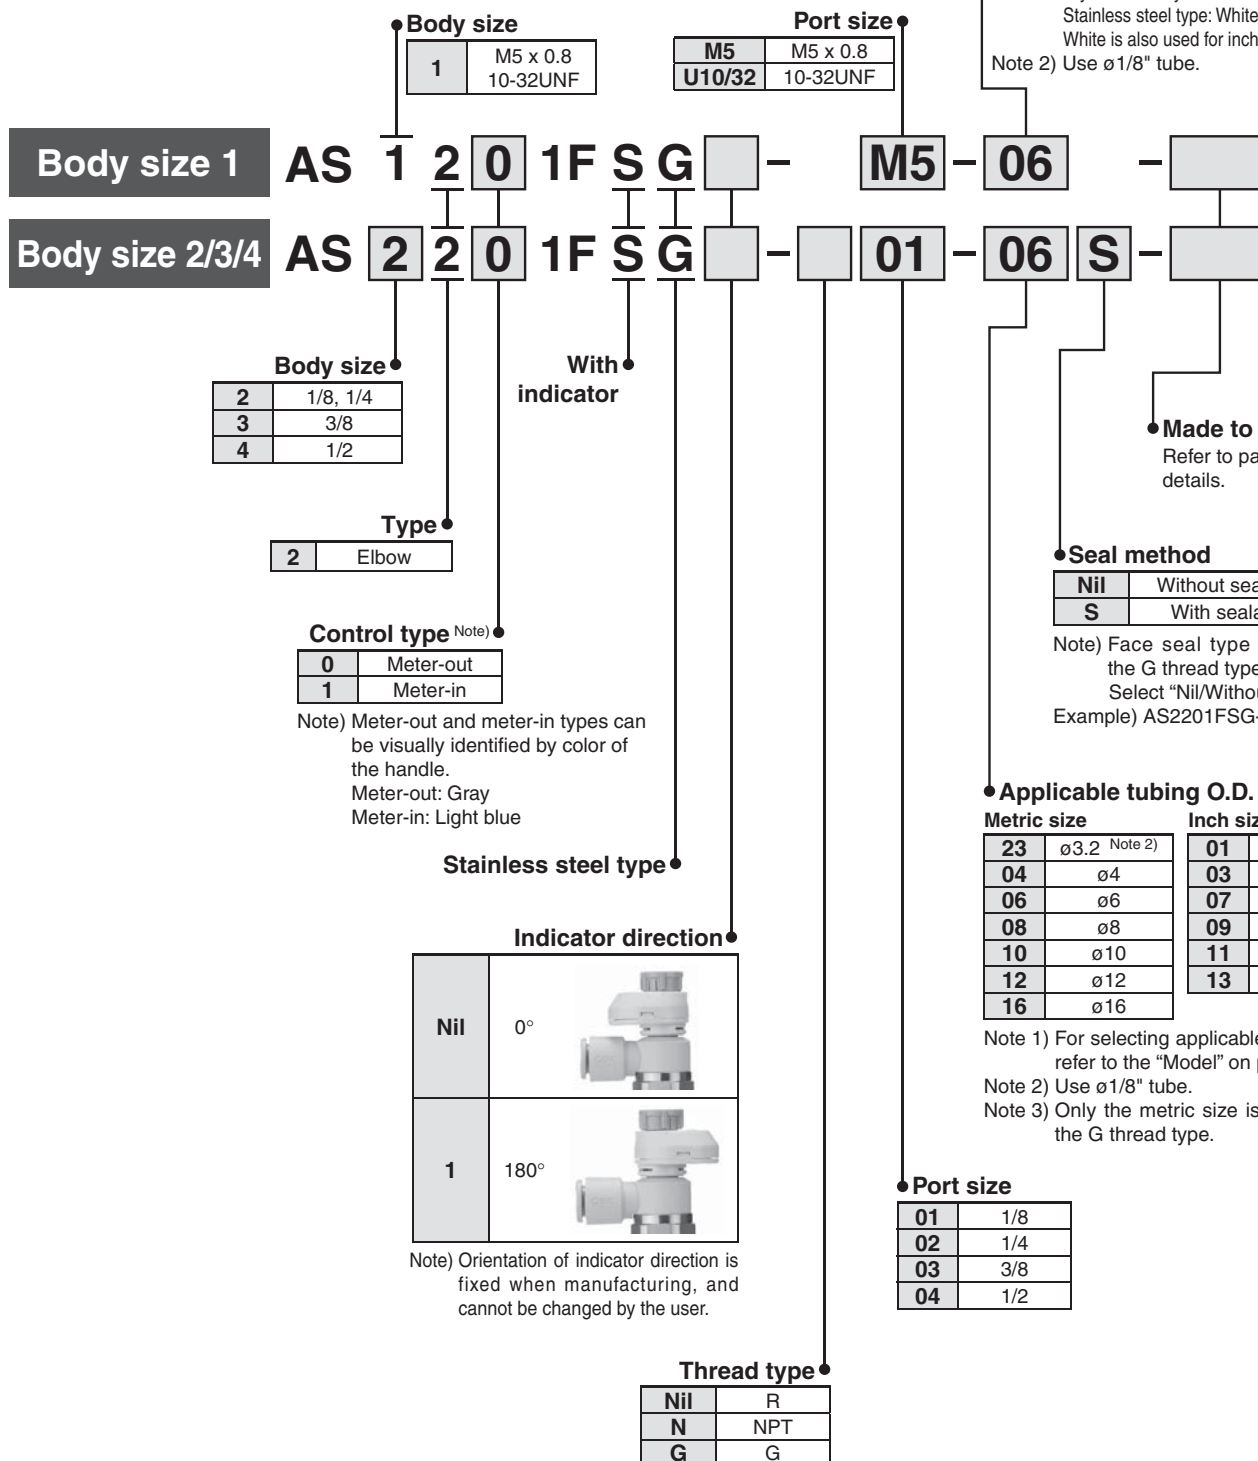


AS-FS
AS-FSG
Uni-AS-FS

Series AS-FSG


Needle Valve/Flow-rate Characteristics

AS1201FSG□-M5, AS1211FSG□-M5

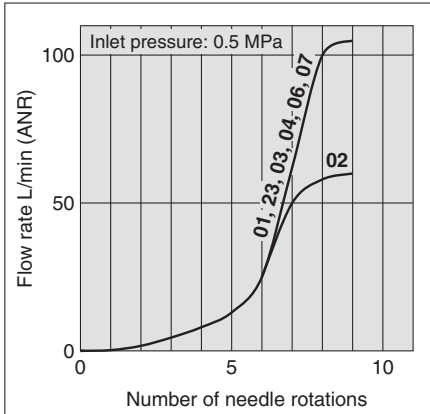


Note) -U10/32 has the same specification as M5.


AS2201FSG□-01, AS2211FSG□-01

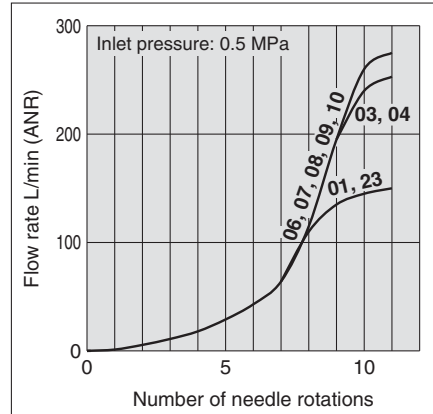


AS2201FSG□-02, AS2211FSG□-02

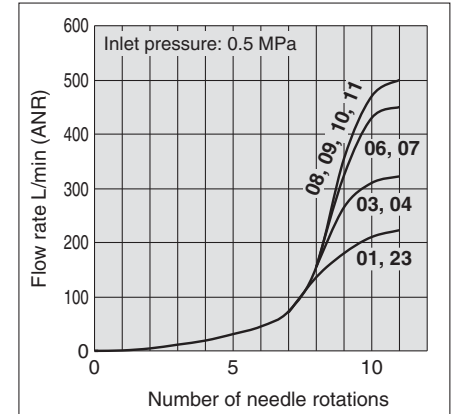

AS3201FSG□, AS3211FSG□

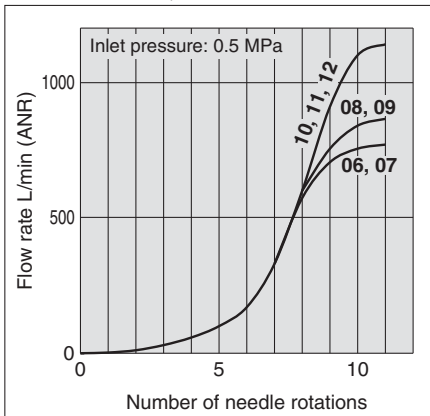


AS4201FSG□, AS4211FSG□

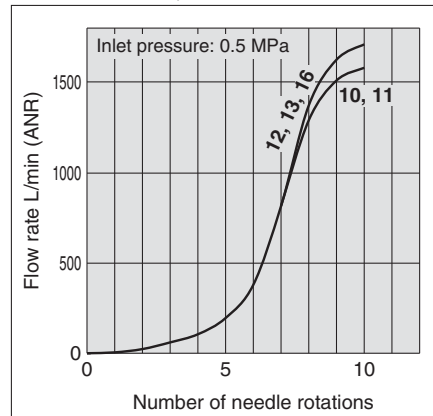

Note) The numbers above the flow-rate characteristic curves in the charts show the applicable tubing outside diameter as defined by the product number.


Construction

Seal method: Gasket seal
For M5, 10-32UNF

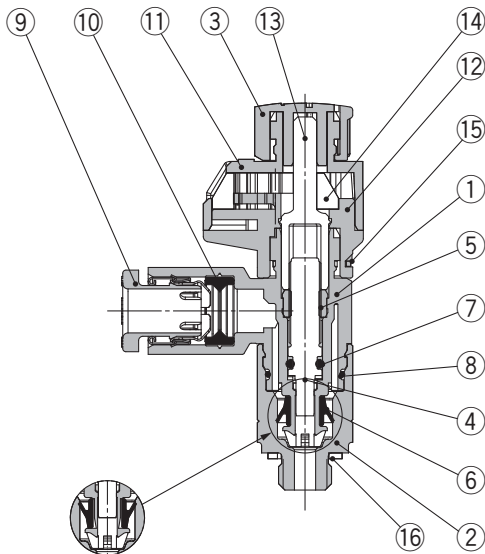


Meter-in type Meter-out type

Seal method: Sealant
For R, NPT thread

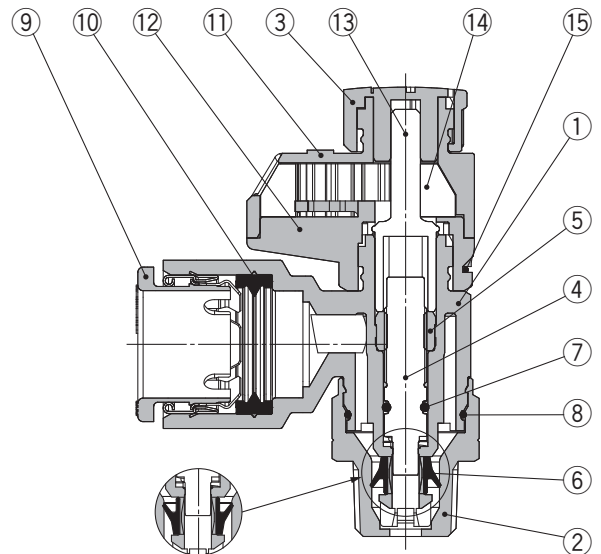

Meter-in type Meter-out type

Seal method: Face seal
For G thread

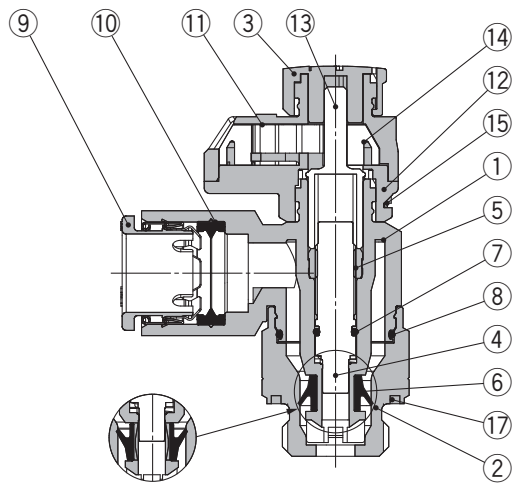

Meter-in type Meter-out type


Component Parts

| No. | Description | Material | Note |
|-----|----------------|---------------------|------|
| 1 | Body A | PBT | |
| 2 | Body B | Stainless steel | |
| 3 | Handle | POM | |
| 4 | Needle | PBT | |
| 5 | Needle guide | Stainless steel | |
| 6 | U seal | HNBR | |
| 7 | O-ring | NBR | |
| 8 | O-ring | NBR | |
| 9 | Cassette | — | |
| 10 | Seal | NBR | |
| 11 | Bonnet A | POM | |
| 12 | Bonnet B | POM | |
| 13 | Gear | POM | |
| 14 | Indicator gear | POM | |
| 15 | Clip | Stainless steel | |
| 16 | Gasket | NBR/Stainless steel | |
| 17 | Seal | NBR | |

Series AS-FSG

Dimensions

Seal method: Gasket seal
For M5, 10-32UNF

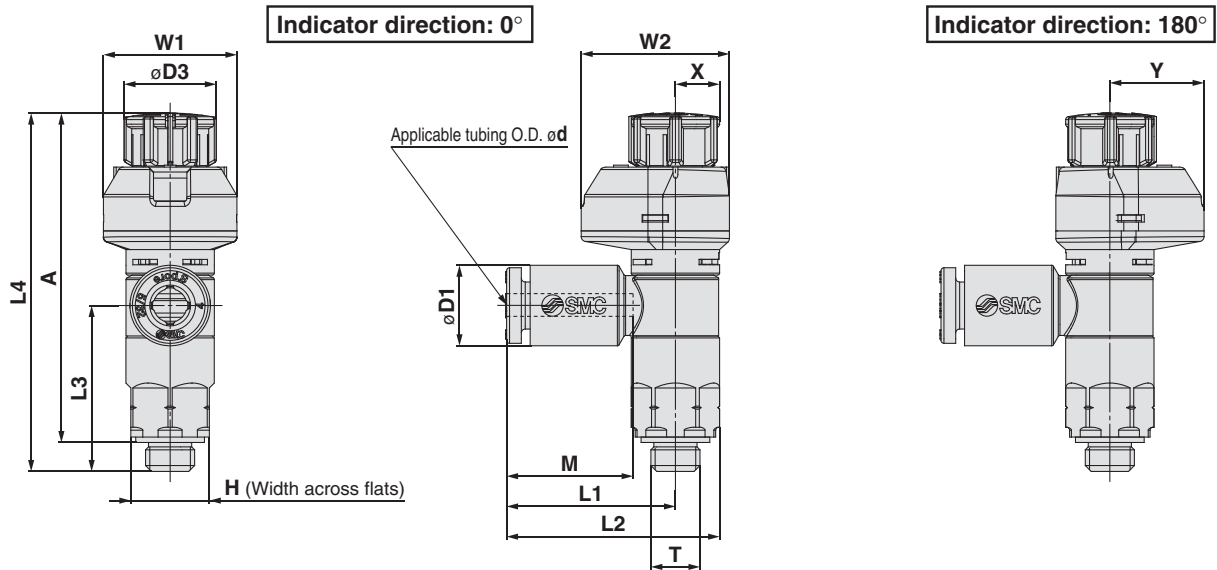

Metric Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g | |
|----------------------|------|----------------------|---|------|-----|------|------|------|------------|--------|-----------|--------|------|------|------|-----|-----|----------|------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | | |
| AS12□1FSG□-M5-02 | 2 | M5 x 0.8 10/32UNF | 8 | 5.8 | 9.4 | 15.8 | 20.3 | 16.9 | 39 | 36.5 | 35 | 33.5 | 11.9 | 13.6 | 15.1 | 5.5 | 9.6 | 7 | |
| AS12□1FSG□-U10/32-02 | | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-M5-23 | 7.2 | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-U10/32-23 | 8.2 | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-M5-04 | 10.4 | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-U10/32-04 | 18.6 | | | 23.1 | | | | | | | | | | | | | | | 16.5 |
| AS12□1FSG□-M5-06 | 6 | | | | | | | | | | | | | | | | | | 8 |
| AS12□1FSG□-U10/32-06 | | | | | | | | | | | | | | | | | | | |

Note 1) Reference dimensions

Note 2) Reference dimensions of threads after installation

Inch Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g | | | | | | | | | | | | | | | | | |
|----------------------|------|----------------------|---|-----|-----|------|------|------|------------|--------|-----------|--------|------|------|------|-----|-----|----------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|---|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-M5-01 | 1/8" | M5 x 0.8 10/32UNF | 8 | 7.2 | 9.4 | 17.2 | 21.7 | 16.9 | 39.0 | 36.5 | 35 | 33.5 | 13.3 | 13.6 | 15.1 | 5.5 | 9.6 | 7 | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-U10/32-01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-M5-03 | 8.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-U10/32-03 | 11.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| AS12□1FSG□-M5-07 | 1/4" | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | 8 |
| AS12□1FSG□-U10/32-07 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


Note 1) Reference dimensions

Note 2) Reference dimensions of threads after installation



Dimensions

Seal method: Sealant
For R, NPT thread

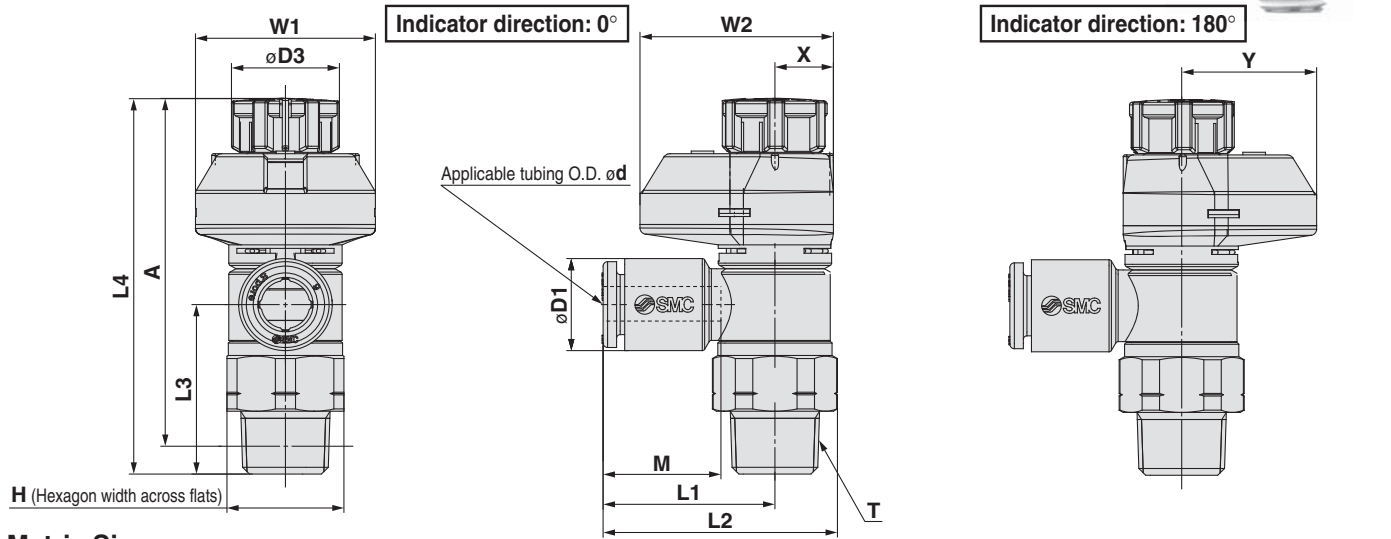

Metric Size

| Model | d | T (R, NPT) | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g |
|---------------------|-----|---------------|--------------|---------|------|------|-------------|------|------------|--------|-----------|--------|------|------|------|-----|------|-------------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | |
| AS22□1FSG□-01-23(S) | 3.2 | 1/8 | 13 (12.7) | 7.2 | 12 | 19.1 | 26.1 (26) | 19.1 | 43.9 | 42.4 | 40.8 | 39.3 | 13.3 | 20 | 21.5 | 6.5 | 15 | 13 (13) |
| AS22□1FSG□-01-04(S) | 4 | | | 14 (14) | | | | | | | | | | | | | | |
| AS22□1FSG□-01-06(S) | 6 | | | 15 (15) | | | | | | | | | | | | | | |
| AS22□1FSG□-01-08(S) | 8 | | | 16 (16) | | | | | | | | | | | | | | |
| AS22□1FSG□-01-10(S) | 10 | | | 16 (15) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-23(S) | 3.2 | 1/4 | 17 (17.5) | 7.2 | 13 | 20.9 | 30 (30.3) | 22.6 | 49.7 | 48.3 | 44.2 | 42.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 23 (24) |
| AS22□1FSG□-02-04(S) | 4 | | | 24 (25) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-06(S) | 6 | | | 25 (26) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-08(S) | 8 | | | 25 (26) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-10(S) | 10 | | | 25 (26) | | | | | | | | | | | | | | |
| AS32□1FSG□-02-06(S) | 6 | 1/4 | 19 | 10.4 | 16.6 | 21.8 | 32.1 | 36.4 | 63.1 | 61.7 | 57.9 | 56.5 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 47 (48) |
| AS32□1FSG□-02-08(S) | 8 | | | 38 (39) | | | | | | | | | | | | | | |
| AS32□1FSG□-02-10(S) | 10 | | | 38 (39) | | | | | | | | | | | | | | |
| AS32□1FSG□-02-12(S) | 12 | | | 50 (51) | | | | | | | | | | | | | | |
| AS32□1FSG□-03-06(S) | 6 | | | 50 (51) | | | | | | | | | | | | | | |
| AS32□1FSG□-03-08(S) | 8 | 3/8 | 19 | 10.4 | 16.6 | 21.8 | 32.1 | 28.7 | 55.4 | 54 | 50.2 | 48.8 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 38 (39) |
| AS32□1FSG□-03-10(S) | 10 | | | 29 (40) | | | | | | | | | | | | | | |
| AS32□1FSG□-03-12(S) | 12 | | | 41 (42) | | | | | | | | | | | | | | |
| AS42□1FSG□-04-10(S) | 10 | | | 41 (42) | | | | | | | | | | | | | | |
| AS42□1FSG□-04-12(S) | 12 | | | 41 (42) | | | | | | | | | | | | | | |
| AS42□1FSG□-04-16(S) | 16 | 1/2 | 24 (23.8) | 15.9 | 18.8 | 27.4 | 40.3 (40.2) | 36.2 | 64.1 | 62.5 | 57 | 55.4 | 15.6 | 26 | 29 | 10 | 19 | 62 (61) |
| AS42□1FSG□-04-12(S) | 12 | 64 (63) | | | | | | | | | | | | | | | | |
| AS42□1FSG□-04-16(S) | 16 | 68 (67) | | | | | | | | | | | | | | | | |

Note 1) Reference dimensions Note 2) Reference dimensions of threads after installation Note 3) () are the dimensions of NPT thread.

Inch Size


| Model | d | T (R, NPT) | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g |
|---------------------|-------|---------------|--------------|---------|------|------|-------------|------|------------|--------|-----------|--------|------|------|------|-----|------|-------------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | |
| AS22□1FSG□-01-01(S) | 1/8" | 1/8 | 13 (12.7) | 7.2 | 12 | 19.1 | 26.1 (26) | 19.1 | 43.8 | 42.4 | 40.7 | 39.3 | 13.3 | 20 | 21.5 | 6.5 | 15 | 13 (13) |
| AS22□1FSG□-01-03(S) | 5/32" | | | 14 (13) | | | | | | | | | | | | | | |
| AS22□1FSG□-01-07(S) | 1/4" | | | 15 (14) | | | | | | | | | | | | | | |
| AS22□1FSG□-01-09(S) | 5/16" | | | 16 (16) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-01(S) | 1/8" | | | 16 (15) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-03(S) | 5/32" | 1/4 | 17 (17.5) | 7.2 | 13 | 20.9 | 30 (30.3) | 22.6 | 49.7 | 48.3 | 44.2 | 42.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 23 (24) |
| AS22□1FSG□-02-07(S) | 1/4" | | | 24 (24) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-09(S) | 5/16" | | | 25 (26) | | | | | | | | | | | | | | |
| AS22□1FSG□-02-11(S) | 3/8" | | | 25 (26) | | | | | | | | | | | | | | |
| AS32□1FSG□-02-07(S) | 1/4" | | | 25 (26) | | | | | | | | | | | | | | |
| AS32□1FSG□-02-09(S) | 5/16" | 3/8 | 19 | 10.4 | 16.6 | 21.8 | 32.1 | 28.7 | 63.1 | 61.7 | 57.9 | 56.5 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 47 (48) |
| AS32□1FSG□-02-11(S) | 3/8" | | | 38 (39) | | | | | | | | | | | | | | |
| AS32□1FSG□-03-07(S) | 1/4" | | | 38 (39) | | | | | | | | | | | | | | |
| AS32□1FSG□-03-09(S) | 5/16" | | | 48 (49) | | | | | | | | | | | | | | |
| AS32□1FSG□-03-11(S) | 3/8" | | | 48 (49) | | | | | | | | | | | | | | |
| AS42□1FSG□-04-11(S) | 3/8" | 1/2 | 24 (23.8) | 15.5 | 18.8 | 27.4 | 40.3 (40.2) | 36.2 | 64.1 | 62.5 | 57 | 55.4 | 15.6 | 26 | 29 | 10 | 19 | 62 (61) |
| AS42□1FSG□-04-13(S) | 1/2" | | | 64 (63) | | | | | | | | | | | | | | |

Note 1) Reference dimensions Note 2) Reference dimensions of threads after installation Note 3) () are the dimensions of NPT thread.

Series AS-FSG

Dimensions

Seal method: Face seal
For G thread

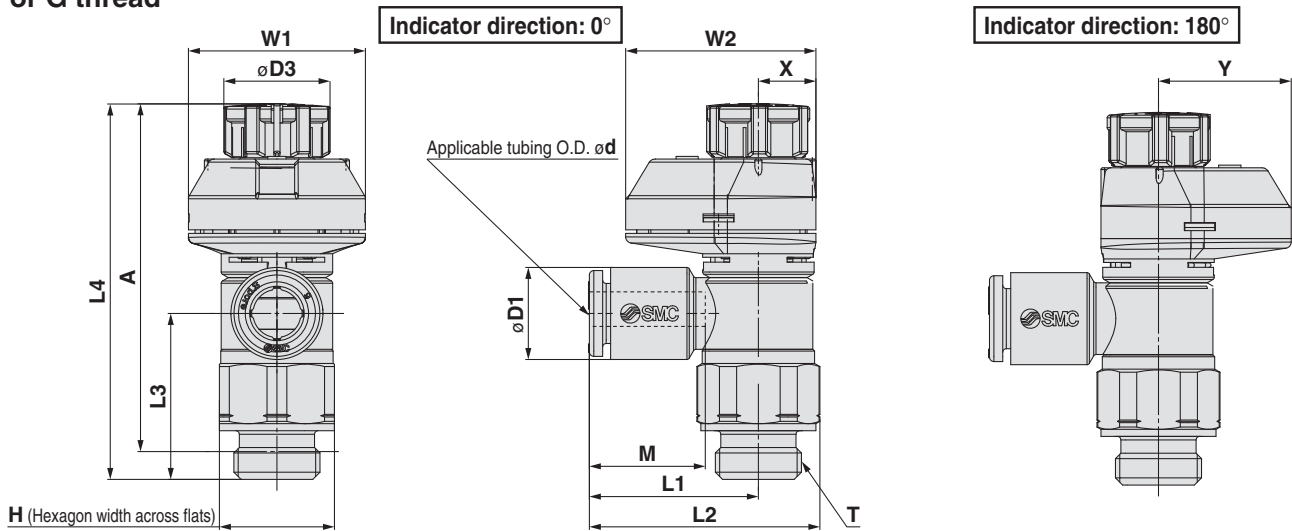

Metric Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g | |
|-------------------|-----|-----|----|------|------|------|------|------|------------|--------|-----------|--------|------|------|------|-----|------|----------|----|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | | |
| AS22□1FSG□-G01-23 | 3.2 | 1/8 | 13 | 7.2 | 12 | 19.1 | 26.1 | 18.8 | 43.8 | 42.4 | 38.3 | 36.9 | 13.3 | 20 | 21.5 | 6.5 | 15 | 14 | |
| AS22□1FSG□-G01-04 | 4 | | | | | | | | | | | | | | | | | | |
| AS22□1FSG□-G01-06 | 6 | | | | | | | | | | | | | | | | | | |
| AS22□1FSG□-G01-08 | 8 | | | | | | | | | | | | | | | | | | |
| AS22□1FSG□-G01-10 | 10 | 1/4 | 17 | 15.9 | 13 | 20.9 | 30 | 22.6 | 49.7 | 48.3 | 43.2 | 41.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 26 | |
| AS22□1FSG□-G02-23 | 3.2 | | | | | | | | | | | | | | | | | | |
| AS22□1FSG□-G02-04 | 4 | | | | | | | | | | | | | | | | | | |
| AS22□1FSG□-G02-06 | 6 | | | | | | | | | | | | | | | | | | |
| AS22□1FSG□-G02-08 | 8 | 3/8 | 21 | 13.2 | 16.6 | 23.4 | 32.5 | 22.6 | 49.7 | 48.3 | 43.2 | 41.8 | 14.2 | 21.5 | 24 | 7.8 | 16.2 | 27 | |
| AS22□1FSG□-G02-10 | 10 | | | | | | | | | | | | | | | | | | |
| AS32□1FSG□-G02-06 | 6 | | | | | | | | | | | | | | | | | | |
| AS32□1FSG□-G02-08 | 8 | | | | | | | | | | | | | | | | | | |
| AS32□1FSG□-G02-10 | 10 | 1/2 | 27 | 15.9 | 18.8 | 27.4 | 41.8 | 28 | 63.1 | 61.7 | 54.6 | 53.2 | 15.6 | 24.5 | 28.5 | 9.3 | 19.2 | 57 | |
| AS32□1FSG□-G02-12 | 12 | | | | | | | | | | | | | | | | | | |
| AS32□1FSG□-G03-06 | 6 | | | | | | | | | | | | | | | | | | |
| AS32□1FSG□-G03-08 | 8 | | | | | | | | | | | | | | | | | | |
| AS32□1FSG□-G03-10 | 10 | 1/2 | 27 | 18.5 | 18.8 | 30.8 | 45.2 | 26.8 | 64.1 | 62.5 | 55.1 | 53.5 | 17 | 26 | 29 | 10 | 19 | 59 | |
| AS32□1FSG□-G03-12 | 12 | | | | | | | | | | | | | | | | | | |
| AS42□1FSG□-G04-10 | 10 | | | | | | | | | | | | | | | | | | |
| AS42□1FSG□-G04-12 | 12 | | | | | | | | | | | | | | | | | | |
| AS42□1FSG□-G04-16 | 16 | | | 23.8 | | 34.8 | 49.2 | 32.7 | | | | | 20.6 | | | | | 80 | |
| | | | | | | | | | | | | | | | | | | | 82 |
| | | | | | | | | | | | | | | | | | | | 86 |

Note 1) Reference dimensions

Note 2) Reference dimensions of threads after installation


Series AS-FSG

Made to Order

Please contact SMC for detailed dimensions, specifications and delivery.




1 Lubricant: Vaseline -X12



Example) AS2201FSG-01-04S-X12


2 Grease-free (Seal: Fluorine-coated) + Restrictor (Without check valve) -X21



Example) AS2201FSG-01-04S-X21

- Note 1) Not particle-free
- Note 2) The restrictor is only compatible with the part number of the meter-out type.
- Note 3) Only the needle and O-ring are fluorine-coated.


3 Restrictor (Without check valve) -X214



Example) AS2201FSG-01-04S-X214

Note) The restrictor is only compatible with the part number of the meter-out type.

4 Clean Series 10-




Example) 10-AS2201FSG-01-04S


- Note 1) Fluorine grease is used.
- Note 2) The particulate generation grade is 3.

AS-FS
AS-FSG
Uni-AS-FS

Speed Controller with Indicator/ Elbow Type: Uni Thread Type Series AS-FS



New-stand male threads for piping that reduces the screw-in time by 1/3.

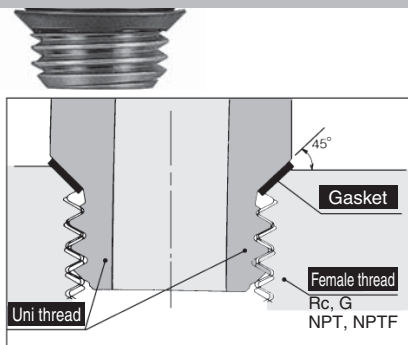


Shape of Uni thread ridge

Use of the chamfered surface of the female thread as the seat surface and adoption of gaskets made by laminating NBR on both surfaces of stainless steel plates achieve secure sealing regardless of the difference of diameters due to the female thread type, deviations due to the tolerance, or the size of the chamfered corner.
(Any standard chamfered female thread can be used.)

A ridge shape has been created as a Uni thread for common applications for Rc, G, NPT and NPTF.

The male thread for piping drastically cuts piping man-hours.

Flow Direction Symbol on Body

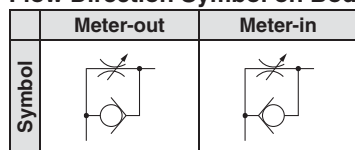

Caution

Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to "Handling Precautions for SMC Products" and the Operation Manual on SMC website, <http://www.smcworld.com>

Model

| Model | Uni thread port size | Applicable tubing O.D. | | | | | | | | | | | | |
|---------------|----------------------|------------------------|---|---|---|----|----|-----------|------|-------|------|-------|------|------|
| | | Metric size | | | | | | Inch size | | | | | | |
| | | 3.2 | 4 | 6 | 8 | 10 | 12 | 16 | 1/8" | 5/32" | 1/4" | 5/16" | 3/8" | 1/2" |
| AS22□1FS□-U01 | 1/8 | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | | |
| AS22□1FS□-U02 | 1/4 | ● | ● | ● | ● | ● | | | ● | ● | ● | ● | ● | |
| AS32□1FS□-U02 | 1/4 | | | ● | ● | ● | ● | | | | ● | ● | ● | |
| AS32□1FS□-U03 | 3/8 | | | ● | ● | ● | ● | | | | ● | ● | ● | |
| AS42□1FS□-U04 | 1/2 | | | | | ● | ● | ● | | | | | ● | ● |

Specifications

| | |
|-------------------------------|--|
| Fluid | Air |
| Proof pressure | 1.5 MPa |
| Max. operating pressure | 1 MPa |
| Min. operating pressure | 0.1 MPa |
| Ambient and fluid temperature | -5 to 60°C (No freezing) |
| Applicable tubing material | Nylon, Soft nylon, Polyurethane ^{Note)} |


Note) Use caution at the max. operating pressure when using soft nylon or polyurethane tubing. (Refer to the WEB catalog or Best Pneumatics No. 6 for details.)

Flow-rate and Sonic Conductance

| Model | | AS22□1FS□-U01 | | | AS22□1FS□-U02 | | | AS32□1FS□ | | | AS42□1FS□ | | |
|---|-----------------|---------------|--------|-----------------|---------------|--------|-----|--------------------------|-------|--------|------------|-------|------------|
| Tubing O.D. | Metric size | ø3.2 | ø4 | ø6 ø8 ø10 | ø3.2 | ø4 | ø6 | ø8 ø10 | ø6 | ø8 | ø10 ø12 | ø10 | ø12 ø16 |
| | Inch size | ø1/8" | ø5/32" | ø1/4" ø5/16" | ø1/8" | ø5/32" | — | ø1/4" ø5/16" ø3/8" | ø1/4" | ø5/16" | ø3/8" | ø3/8" | ø1/2" |
| C values: Sonic conductance dm ³ /(s·bar) | Free flow | 0.4 | 0.6 | 0.6 | 0.7 | 1.0 | 1.3 | 1.5 | 1.6 | 1.7 | 2.5 | 4.4 | 4.8 |
| | Controlled flow | 0.4 | 0.7 | 0.8 | 0.6 | 0.9 | 1.3 | | 2.1 | 2.4 | 3.3 | 4.4 | 4.9 |
| b values: Critical pressure ratio | Free flow | 0.2 | | 0.3 | 0.3 | | 0.4 | | 0.4 | | 0.3 | | 0.3 |
| | Controlled flow | 0.2 | | 0.3 | 0.3 | | | 0.3 | | 0.3 | | | 0.3 |

Note) C and b values are for controlled flow with the needle fully open and free flow with the needle fully closed.

Speed Controller with Indicator/Elbow Type Uni Thread Type **Series AS-FS**



How to Order

AS 2 2 0 1 F S - **U01** - **06**

| Body size | | Type | |
|-----------|----------|------|-------|
| 2 | 1/8, 1/4 | 2 | Elbow |
| 3 | 3/8 | | |
| 4 | 1/2 | | |

| Control type (Note) | |
|---------------------|-----------|
| 0 | Meter-out |
| 1 | Meter-in |

Note) Meter-out and meter-in types can be visually identified by color of the handle.
 Meter-out: Gray
 Meter-in: Light blue

| Indicator direction | |
|---------------------|------|
| Nil | 0° |
| 1 | 180° |

Note) Orientation of indicator direction is fixed when manufacturing, and cannot be changed by the user.

| Port size | |
|-----------|---------|
| U01 | Uni 1/8 |
| U02 | Uni 1/4 |
| U03 | Uni 3/8 |
| U04 | Uni 1/2 |


• Applicable tubing O.D. (Note 1)

| Metric size | | Inch size | |
|-------------|---------------|-------------|--------|
| Tubing O.D. | | Tubing O.D. | |
| 23 | ø3.2 (Note 2) | 01 | ø1/8" |
| 04 | ø4 | 03 | ø5/32" |
| 06 | ø6 | 07 | ø1/4" |
| 08 | ø8 | 09 | ø5/16" |
| 10 | ø10 | 11 | ø3/8" |
| 12 | ø12 | 13 | ø1/2" |
| 16 | ø16 | | |


Note 1) For selecting applicable tubing O.D., refer to the "Model" on page 19.
 Metric size and inch size types can be visually identified by color of the release button.
 Metric size: Light gray
 Inch size: Orange
 Note 2) Use ø1/8" tube.

Needle Valve/Flow-rate Characteristics


AS2201FS□-U01, AS2211FS□-U01

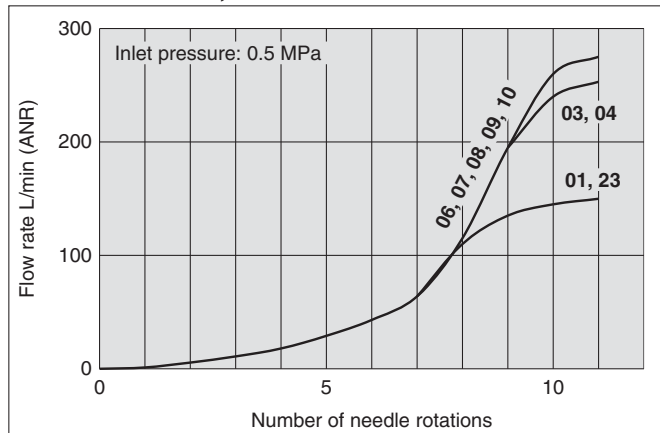


AS2201FS□-U02, AS2211FS□-U02

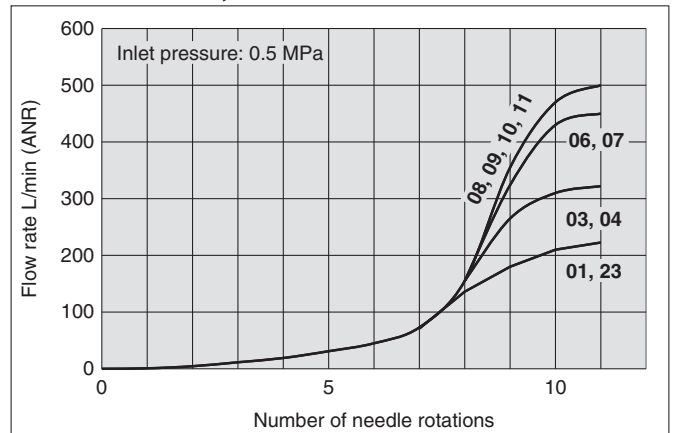

AS3201FS□, AS3211FS□

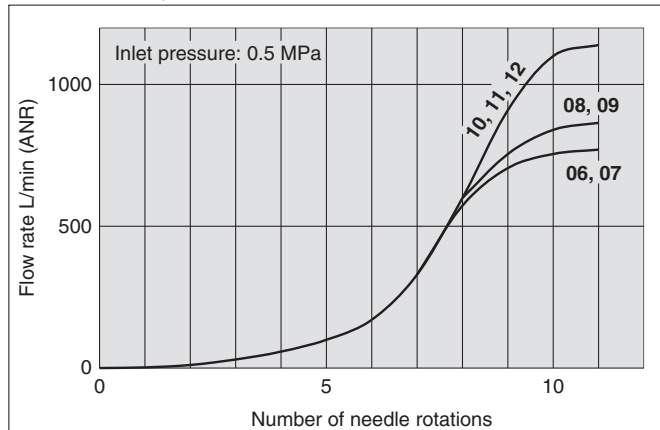

AS4201FS□, AS4211FS□

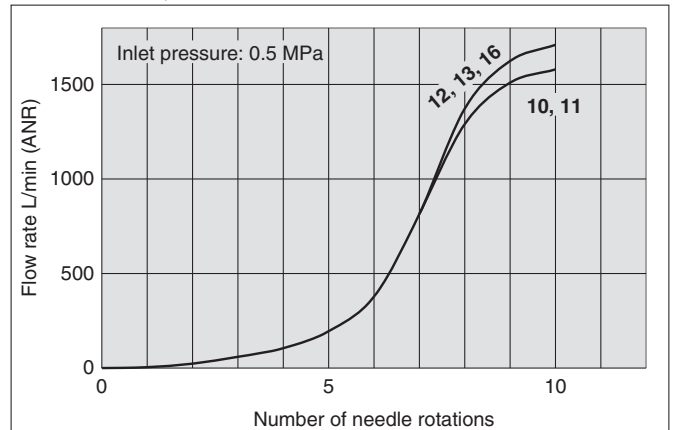


Note) The numbers above the flow-rate characteristic curves in the charts show the applicable tubing outside diameter as defined by the product number.

Series AS-FS

Construction

Elbow type

AS22□1FS□-U01-06A

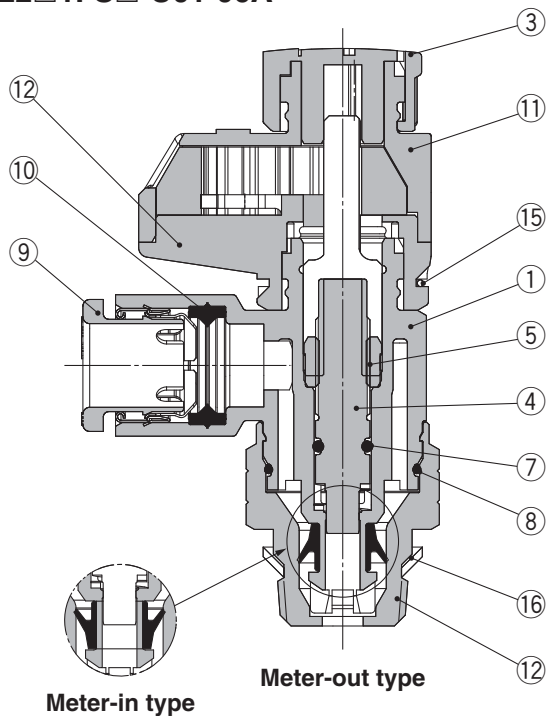


Component Parts

| No. | Description | Material | Note |
|-----|----------------|---------------------|----------------------------|
| 1 | Body A | PBT | |
| 2 | Body B | Brass | Electroless nickel plating |
| 3 | Handle | POM | |
| 4 | Needle | PBT | |
| 5 | Needle guide | Brass | Electroless nickel plating |
| 6 | U seal | HNBR | |
| 7 | O-ring | NBR | |
| 8 | O-ring | NBR | |
| 9 | Cassette | — | |
| 10 | Seal | NBR | |
| 11 | Bonnet A | POM | |
| 12 | Bonnet B | POM | |
| 13 | Gear | POM | |
| 14 | Indicator gear | POM | |
| 15 | Clip | Stainless steel | |
| 16 | Gasket | NBR/Stainless steel | |

Dimensions

Seal method: Gasket seal
For Uni thread

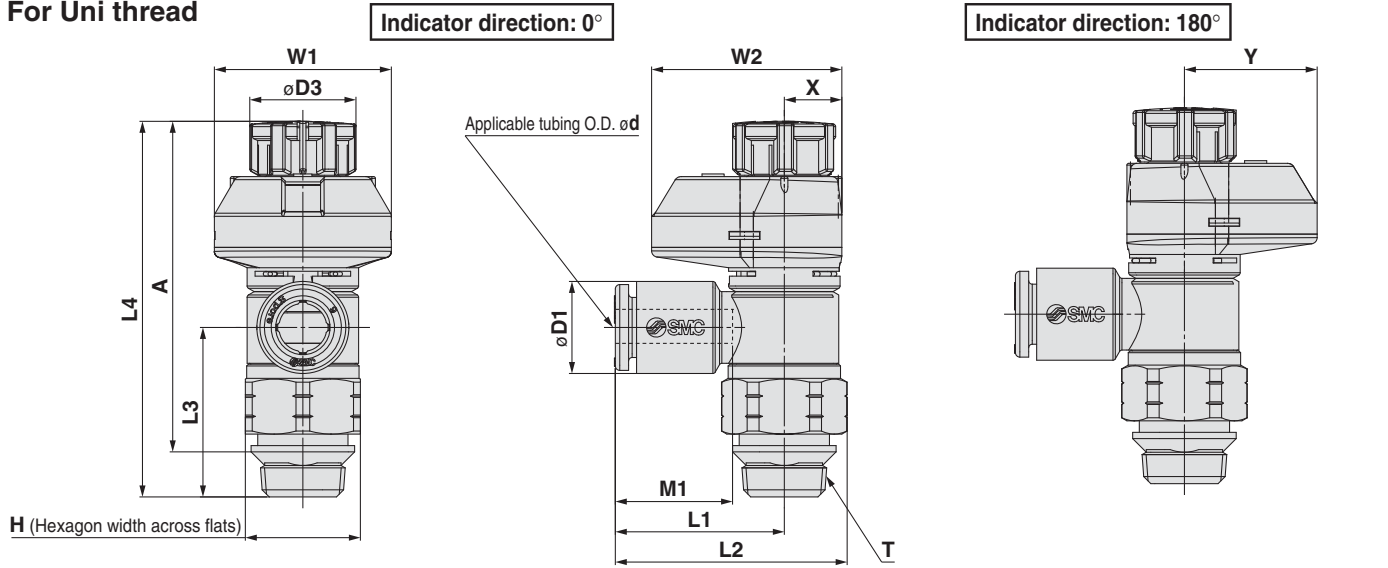

Metric Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g | | | | |
|------------------|-----|------|-----------|------|------|------|-----------|-------------|------------|--------|-----------|--------|------|------|------|-----|------|-------------|-------------|------|---------|---------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | | | | | |
| AS22□1FS□-U01-23 | 3.2 | 1/8 | 13 (12.7) | 7.2 | 12 | 19.1 | 26.1 (26) | 19.1 | 43.9 | 42.4 | 40.8 | 39.3 | 13.3 | 20 | 21.5 | 6.5 | 15 | 13 (13) | | | | |
| AS22□1FS□-U01-04 | 4 | | | 8.2 | | | | | | | | | | | | | | 22.4 | 29.4 (29.3) | 14.2 | 15 (14) | |
| AS22□1FS□-U01-06 | 6 | | | 10.4 | | | | | | | | | | | | | | 25.3 | 32.3 (32.2) | 15.6 | 16 (15) | |
| AS22□1FS□-U01-08 | 8 | | | 13.2 | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-U01-10 | 10 | | | 15.9 | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-U02-23 | 3.2 | 1/4 | 17 (17.5) | 7.2 | 13 | 20.9 | 30 (30.3) | 22.6 | 49.7 | 48.3 | 44.2 | 42.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 24 (25) | | | | |
| AS22□1FS□-U02-04 | 4 | | | 8.2 | | | | | | | | | | | | | | 23.4 | 32.5 (32.8) | 14.2 | 25 (26) | |
| AS22□1FS□-U02-06 | 6 | | | 10.4 | | | | | | | | | | | | | | 23.9 | 33 (33.3) | 15.6 | 26 (27) | |
| AS22□1FS□-U02-08 | 8 | | | 13.2 | | | | | | | | | | | | | | | | | | |
| AS22□1FS□-U02-10 | 10 | | | 15.9 | | | | | | | | | | | | | | | | | | |
| AS32□1FS□-U02-06 | 6 | 1/4 | 19 | 10.4 | 16.6 | 21.8 | 32.1 | 36.4 | 63.1 | 61.7 | 57.9 | 56.5 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 47 (48) | | | | |
| AS32□1FS□-U02-08 | 8 | | | 13.2 | | | | | | | | | | | | | | 22.7 | 33 | 14.2 | 48 (49) | |
| AS32□1FS□-U02-10 | 10 | | | 15.9 | | | | | | | | | | | | | | 26.7 | 37 | 15.6 | 50 (51) | |
| AS32□1FS□-U02-12 | 12 | | | 18.5 | | | | | | | | | | | | | | 29.7 | 40 | 17 | | |
| AS32□1FS□-U03-06 | 6 | | | 3/8 | | | | | | | | | | | | | | 19 | 10.4 | 16.6 | 21.8 | 32.1 |
| AS32□1FS□-U03-08 | 8 | 13.2 | 22.7 | | 33 | 14.2 | 39 (40) | | | | | | | | | | | | | | | |
| AS32□1FS□-U03-10 | 10 | 15.9 | 26.7 | | 37 | 15.6 | 41 (42) | | | | | | | | | | | | | | | |
| AS32□1FS□-U03-12 | 12 | 18.5 | 29.7 | | 40 | 17 | | | | | | | | | | | | | | | | |
| AS42□1FS□-U04-10 | 10 | 1/2 | 24 (23.8) | | 15.9 | 18.8 | 27.4 | 40.3 (40.2) | 36.2 | 64.1 | 62.5 | 57 | 55.4 | 15.6 | 26 | 29 | 10 | | 19 | | | |
| AS42□1FS□-U04-12 | 12 | | | 18.5 | 30.8 | | | | | | | | | | | | | 43.7 (43.6) | | 35.1 | 17 | 62 (61) |
| AS42□1FS□-U04-16 | 16 | | | 23.8 | 34.8 | | | | | | | | | | | | | 47.7 (47.6) | | 32.7 | 20.6 | 66 (65) |

Note 1) Reference dimensions Note 2) Reference dimensions of threads after installation Note 3) () are the dimensions of NPT thread.

Inch Size

| Model | d | T | H | D1 | D3 | L1 | L2 | L3 | L4 Note 1) | | A Note 2) | | M | W1 | W2 | X | Y | Weight g | | | |
|------------------|-------|------|-----------|------|------|------|-----------|-------------|------------|--------|-----------|--------|------|------|------|-----|------|-------------|-------------|------|---------|
| | | | | | | | | | Unlocked | Locked | Unlocked | Locked | | | | | | | | | |
| AS22□1FS□-U01-01 | 1/8" | 1/8 | 13 (12.7) | 7.2 | 12 | 19.1 | 26.1 (26) | 19.1 | 43.8 | 42.4 | 40.7 | 39.3 | 13.3 | 20 | 21.5 | 6.5 | 15 | 13 (13) | | | |
| AS22□1FS□-U01-03 | 5/32" | | | 11.2 | | | | | | | | | | | | | | 20.8 | 27.8 (27.7) | 14.2 | 14 (13) |
| AS22□1FS□-U01-07 | 1/4" | | | 13.2 | | | | | | | | | | | | | | 22.4 | 29.4 (29.3) | 15.6 | 15 (14) |
| AS22□1FS□-U01-09 | 5/16" | | | 15.9 | | | | | | | | | | | | | | | | | |
| AS22□1FS□-U02-01 | 1/8" | 1/4 | 17 (17.5) | 7.2 | 13 | 20.9 | 30 (30.3) | 22.6 | 49.7 | 48.3 | 44.2 | 42.8 | 13.3 | 21.5 | 24 | 7.8 | 16.2 | 23 (24) | | | |
| AS22□1FS□-U02-03 | 5/32" | | | 8.2 | | | | | | | | | | | | | | 23.4 | 32.5 (32.8) | 14.2 | 24 (24) |
| AS22□1FS□-U02-07 | 1/4" | | | 11.2 | | | | | | | | | | | | | | 23.9 | 33 (33.3) | 15.6 | 25 (25) |
| AS22□1FS□-U02-09 | 5/16" | | | 13.2 | | | | | | | | | | | | | | 26.4 | 35.5 (35.8) | 17 | 26 (26) |
| AS22□1FS□-U02-11 | 3/8" | | | 15.5 | | | | | | | | | | | | | | | | | |
| AS32□1FS□-U02-07 | 1/4" | 3/8 | 19 | 11.2 | 16.6 | 21.8 | 32.1 | 28.7 | 63.1 | 61.7 | 57.9 | 56.5 | 13.3 | 24.5 | 28.5 | 9.3 | 19.2 | 47 (48) | | | |
| AS32□1FS□-U02-09 | 5/16" | | | 13.2 | | | | | | | | | | | | | | 22.7 | 33 | 14.2 | 48 (49) |
| AS32□1FS□-U02-11 | 3/8" | | | 15.5 | | | | | | | | | | | | | | 26.7 | 37 | 15.6 | 50 (51) |
| AS32□1FS□-U03-07 | 1/4" | | | 3/8 | | | | | | | | | | | | | | 19 | 11.2 | 16.6 | 21.8 |
| AS32□1FS□-U03-09 | 5/16" | 13.2 | 22.7 | | 33 | 14.2 | 39 (40) | | | | | | | | | | | | | | |
| AS32□1FS□-U03-11 | 3/8" | 15.5 | 26.7 | | 37 | 15.6 | 41 (42) | | | | | | | | | | | | | | |
| AS42□1FS□-U04-11 | 3/8" | 1/2 | 24 (23.8) | | 15.5 | 18.8 | 27.4 | 40.3 (40.2) | 36.2 | 64.1 | 62.5 | 57 | 55.4 | 15.6 | 26 | 29 | 10 | | 19 | | |
| AS42□1FS□-U04-13 | 1/2" | | | 19.3 | 30.9 | | | | | | | | | | | | | 43.8 (43.7) | | 34.7 | 17 |

Note 1) Reference dimensions Note 2) Reference dimensions of threads after installation Note 3) () are the dimensions of NPT thread.



Series AS-FS

Specific Product Precautions 1

Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smcworld.com>

Design and Selection

⚠ Warning

1. Check the specifications.

The products in this catalog are designed to be used in compressed air systems (including vacuum) only.

If the products are used in an environment where pressure or temperature is out of the specified range, damage and/or malfunction may result. Do not use under such conditions. (Refer to the specifications.)

Please contact SMC when using a fluid other than compressed air (including vacuum).

We do not guarantee against any damage if the product is used outside of the specification range.

2. The products in this catalog are not designed for the use as stop valve with zero air leakage.

A certain amount of leakage is allowed in the product's specifications.

Tightening the needle to reduce leakage to zero may result in equipment damage.

3. Do not disassemble the product or make any modifications, including additional machining.

It may cause human injury and/or an accident.

4. The flow-rate characteristics for each product are representative values.

The flow-rate characteristics are characteristics of each individual product. Actual values may differ depending on the piping, circuitry, pressure conditions, etc.

5. Sonic conductance (C) and critical pressure ratio (b) values for products are representative values.

The speed controller's controlled flow values are with the needle fully open and free flow with the needle fully closed.

6. Check if PTFE can be used in application.

PTFE powder (Polytetrafluoroethylene resin) is included in the seal material for piping taper thread of male thread type. Confirm that the use of it will not cause any adverse effect on the system.

Please contact SMC if the Material Safety Data Sheet (MSDS) is required.

Mounting

⚠ Warning

1. Operation Manual

Install the products and operate them only after reading the Operation Manual carefully and understanding its contents. Also, keep the Operation Manual where it can be referred to as necessary.

2. Ensure sufficient space for maintenance activities.

When installing the products, allow access for maintenance.

3. Tighten threads with the proper tightening torque.

When installing the products, follow the listed proper torque.

Mounting

⚠ Warning

4. After pushing the handle down to lock, confirm that it is locked.

It should not be possible to rotate the handle to the right or to the left. If the handle is pulled with force, it may break. Do not pull the handle with excessive force.



Locked

Unlocked

5. Check the degree of rotation of the needle valve.

The products in this catalog are retainer type so that the needle is not removed completely. Over rotation will cause damage.

6. Do not use tools such as pliers to rotate the handle.

It can cause idle rotation of the handle or damage.

7. Verify the air flow direction.

Mounting backward is dangerous, because the speed adjustment needle will not work and the actuator may lurch suddenly.

8. Adjust the speed by opening the needle slowly from the fully closed state.

Loose needle valves may cause unexpected sudden actuator lurching.

When a needle valve is turned clockwise, it is closed and actuator speed decreases. When a needle valve is turned counter-clockwise, it is open and actuator speed increases.

9. Do not apply excessive force or shock to the body or fittings with an impact tool.

It can cause damage or air leakage.

10. Refer to the Fittings & Tubing Precautions in the Best Pneumatics No. 6 catalog for handling One-touch fittings.

11. Tubing O.D. $\varnothing 2$

Tubing other than that from SMC cannot be used, because it may result in inability to connect the tube, air leakage after connecting the tube or disconnection of the tube.

12. To install/remove the product, use an appropriate wrench to tighten/loosen at the supplied nut on body B.

Do not apply torque at other points as the product may be damaged. Rotate body A manually for positioning after installation.



Series AS-FS Specific Product Precautions 2


Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smcworld.com>

Mounting

Warning

13. Do not use body A for applications involving continuous rotation.

Body A and the fitting section may be damaged.



Caution

For M5, 10-32UNF

Tightening method


First, tighten it by hand, then give it an additional 1/6 turn to 1/4 turn with a wrench. A reference value for the tightening torque is 1 to 1.5 N·m.

Note) Excessive tightening may damage the thread portion or deform the gasket and cause air leakage.

If the screw is too shallowly screwed in, it may come loose or air may leak.

Chamfered area for female thread

1. Confirming to ISO 16030 (air pressure fluid dynamics – connection – ports and stud ends), the chamfered dimensions shown in the table below are recommended.



| Female thread port size | Chamfered dimension ϕD (Recommended value) |
|-------------------------|--|
| M5 | 5.1 to 5.4 |
| 10-32UNF | 5.0 to 5.3 |

For R, NPT Thread (With sealant)


Tightening method

1. The proper tightening torques of the fittings are as shown in the table below. As a guide, tighten by hand, then turn it two or three turns with a wrench. Check the dimensions of each product for the hexagon width across flats.

| Connection thread port size | Proper tightening torque (N·m) |
|-----------------------------|--------------------------------|
| NPT, R1/8 | 3 to 5 |
| NPT, R1/4 | 8 to 12 |
| NPT, R3/8 | 15 to 20 |
| NPT, R1/2 | 20 to 25 |

Chamfered area for female thread

By chamfering as shown in the table below, machining of threads is easier and effective for burr prevention.



| Connection thread port size | Chamfered dimension ϕD (Recommended value) | |
|-----------------------------|--|--------------|
| | Rc | NPT, NPTF |
| 1/8 | 10.2 to 10.4 | 10.5 to 10.7 |
| 1/4 | 13.6 to 13.8 | 14.1 to 14.3 |
| 3/8 | 17.1 to 17.3 | 17.4 to 17.6 |
| 1/2 | 21.4 to 21.6 | 21.7 to 21.9 |

* For Uni thread, Rz 12.5 is necessary for sealing at the chamfered part.



Series AS-FS Specific Product Precautions 3

Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smcworld.com>

Mounting

⚠ Caution

For G Thread (Face seal type)


Tightening method

First, tighten the threaded portion by hand, then use a proper wrench, which could be suitable for the width across flats of the hexagon body, to tighten it further at a wrench tightening angle shown in the table below. For a tightening torque guide, refer to the table below. Check the dimensions of each product for the hexagon width across flats.

| Connection thread port size | Wrench tightening angle after tightened by hand (deg) | Proper tightening torque (N·m) |
|-----------------------------|---|--------------------------------|
| G1/8 | 10 to 20 | 3 to 4 |
| G1/4 | 15 to 35 | 4 to 5 |
| G3/8 | 15 to 35 | 8 to 9 |
| G1/2 | 15 to 35 | 14 to 15 |

Chamfered area for female thread (Recommended value)

1. Confirming to 16030-2001, the chamfered dimensions shown in the table below are recommended. By chamfering as shown in the table below, machining of threads is easier and effective for burr prevention.



| Nominal thread port size | Chamfered dimension øD | |
|--------------------------|------------------------|------|
| | Min. | Max. |
| 1/8 | 9.8 | 10.2 |
| 1/4 | 13.3 | 13.7 |
| 3/8 | 16.8 | 17.2 |
| 1/2 | 21.0 | 21.4 |

2. Use G external threads with G internal threads.

For Uni Thread

Tightening method

1. First, tighten the threaded portion by hand, then use a proper wrench, which could be suitable for the width across flats of the hexagon body, to tighten it further at a wrench tightening angle shown in the table below. For a tightening torque guide, refer to the table below.

Connection Female Thread: Rc, NPT, NPTF

| Uni thread port size | Wrench tightening angle after tightened by hand (deg) | Tightening torque (N·m) |
|----------------------|---|-------------------------|
| 1/8 | 30 to 60 | 3 to 5 |
| 1/4 | 30 to 60 | 8 to 12 |
| 3/8 | 15 to 45 | 14 to 16 |
| 1/2 | 15 to 30 | 20 to 22 |


Connection Female Thread: G

| Uni thread port size | Wrench tightening angle after tightened by hand (deg) | Tightening torque (N·m) |
|----------------------|---|-------------------------|
| 1/8 | 30 to 45 | 3 to 4 |
| 1/4 | 15 to 30 | 4 to 5 |
| 3/8 | 15 to 30 | 8 to 9 |
| 1/2 | 15 to 30 | 14 to 15 |

2. The gasket can be reused up to 6 to 10 times.

Chamfered area for female thread

By chamfering as shown in the table below, machining of threads is easier and effective for burr prevention.



| Connection thread port size | Chamfered dimension øD (Recommended value) | | |
|-----------------------------|--|--------------|--------------|
| | G | Rc | NPT, NPTF |
| 1/8 | 10.2 to 10.6 | 10.2 to 10.4 | 10.5 to 10.7 |
| 1/4 | 13.6 to 14.0 | 13.6 to 13.8 | 14.1 to 14.3 |
| 3/8 | 17.1 to 17.5 | 17.1 to 17.3 | 17.4 to 17.6 |
| 1/2 | 21.4 to 21.8 | 21.4 to 21.6 | 21.7 to 21.9 |

- * For Uni thread, Rz 12.5 is necessary for sealing at the chamfered part.



Series AS-FS Specific Product Precautions 4

Be sure to read this before handling. Refer to the back cover for Safety Instructions. For Flow Control Equipment Precautions, refer to “Handling Precautions for SMC Products” and the Operation Manual on SMC website, <http://www.smcworld.com>


Mounting

⚠ Caution

1. This product has a stopper for fully close in rotating direction. Excess torque may break the stopper. Table below shows the maximum allowable torque of the handle.

| Body size | Maximum allowable torque (N·m) |
|-----------|--------------------------------|
| M5 | 0.05 |
| 1/8 | 0.07 |
| 1/4 | 0.16 |
| 3/8 | 0.2 |
| 1/2 | 0.4 |

When performing the piping work, turn the tightening tool in the horizontal direction to the hexagon across flats of the body B so that any moment is not applied to the body A. If the tool is in contact with the body A, this may cause the body B to come off.

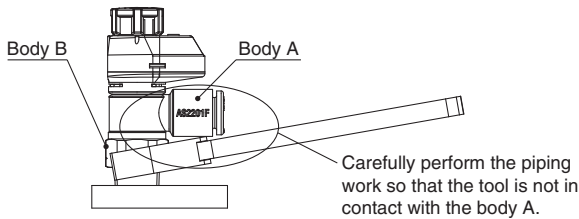

2. Actuator speed needs to be checked each time the setting is changed.

Individual product difference due to tolerance of the components, individual actuator difference, operating conditions and temperature, etc. may cause a large variation in the actuator speed, and for this reason, the final actuator speed needs to be checked every time the setting is changed.

3. Force for lifting the handle is specified as shown in the table below.

Larger lifting force than specified in the table below will cause removal of the handle, flow rate not according to the flow-rate characteristics curve, incorrect flow indication with the indicator or damage to the product.

| Port size | Handle lifting force |
|--------------------|----------------------|
| M5 10-32/UNF | 1 to 1.5 N |
| 1/8, 1/4, 3/8, 1/2 | 3.5 to 4 N |

4. Do not rotate the product by the indicator part.

Use a wrench for mounting the product. Otherwise, it may cause damage to the product.

Piping Threads with Sealant

⚠ Caution

1. If the fitting is tightened with excessive torque, a large amount of sealant will seep out. Remove the excess sealant.
2. Insufficient tightening may loosen the threads, or cause air leakage.
3. Reuse
 - 1) Normally, fittings with a sealant can be reused 2 to 3 times.
 - 2) To prevent air leakage through the sealant, remove any loose sealant stuck to the fitting by blowing air over the threaded portion.
 - 3) If the sealant no longer provides effective sealing, wrap sealing tape over the sealant before reusing. Do not use the sealant in any form other than a tape type.
4. Once the fitting has been tightened, backing it out to its original position often causes the sealant to become defective. Air leakage will occur.
5. Use R external threads with Rc internal threads and NPT external threads with NPT internal threads.


Piping

⚠ Caution

1. Refer to the Fittings & Tubing Precautions in the Best Pneumatics No. 6 catalog for handling One-touch fittings.
2. Preparation before piping




Before piping is connected, it should be thoroughly blown out with air (flushing) or washed to remove chips, cutting oil and other debris from inside the pipe.
3. Wrapping of sealant tape

When screwing together pipes and fittings, etc., be certain that chips from the pipe threads and sealing material do not get inside the pipe. Also, when the sealant tape is used, leave approx. 1 thread ridge exposed at the end of the threads.



Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “**Caution**,” “**Warning**” or “**Danger**.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)*1, and other safety regulations.

-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

- *1) ISO 4414: Pneumatic fluid power – General rules relating to systems.
ISO 4413: Hydraulic fluid power – General rules relating to systems.
IEC 60204-1: Safety of machinery – Electrical equipment of machines.
(Part 1: General requirements)
ISO 10218-1: Manipulating industrial robots – Safety.
etc.

Warning

- 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.**
Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalog information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.
- 2. Only personnel with appropriate training should operate machinery and equipment.**
The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.
- 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.**
 1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
 2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
 3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.
- 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.**
 1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
 2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalog.
 3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
 4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

Caution

- 1. The product is provided for use in manufacturing industries.**
The product herein described is basically provided for peaceful use in manufacturing industries.
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.
If anything is unclear, contact your nearest sales branch.

Limited warranty and Disclaimer/ Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”.

Read and accept them before using the product.

Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.*2)
Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided.
This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalog for the particular products.
***2) Vacuum pads are excluded from this 1 year warranty.**
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered.
Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

Revision history

- Edition B**
- * Stainless steel type added.
 - * G thread/Uni thread types added.
 - * Made to Order added.
 - * Variation/AS32□1FS□□02 added.
 - * Needle guide material changed.
 - * AS12□1FS-M5E, U10/32E added.
 - * Number of pages increased from 12 to 28.

SR

 **Safety Instructions** Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

SMC Corporation

Akihabara UDX 15F,
4-14-1, Sotokanda, Chiyoda-ku, Tokyo 101-0021, JAPAN
Phone: 03-5207-8249 Fax: 03-5298-5362
<http://www.smcworld.com>
© 2014 SMC Corporation All Rights Reserved

Specifications are subject to change without prior notice and any obligation on the part of the manufacturer.

D-G

1st printing RT printing SR 8930SZ Printed in Japan.