





Number of poles	Nr.	3
Operating voltage type		AC
Contact characteristics		
IEC Conventional free air thermal current I _{th}	A	63
UL technical data		
UL Standard		UL98
Dimensions		

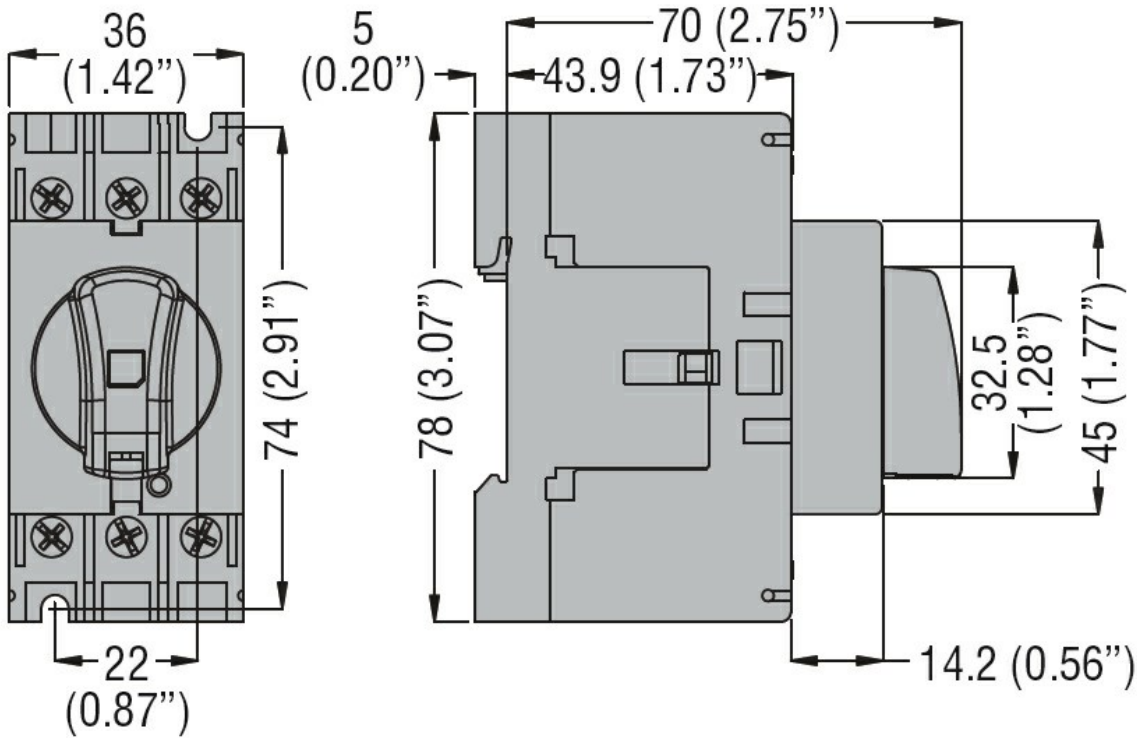

Wiring diagrams



Certifications and compliance

Compliance

- CSA C22.2 n°4
- IEC/EN 60947-1
- IEC/EN 60947-3

UL98

Certifications

CCC

CSA C22.2 n°4

cULus according to UL98

EAC

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnector