

Laser Module LC-LMD-635-05

Ø 10.5 mm 635 nm Laser Module


FEATURES

1. APC (auto power control) IC inside
2. Low current consumption of the APC circuit
3. Surge current protection
4. High quality glass lens for output beam
5. Adjustable focus



PART NO. INDICATIONS

LC-LMD - 635 - 05 - XX - A

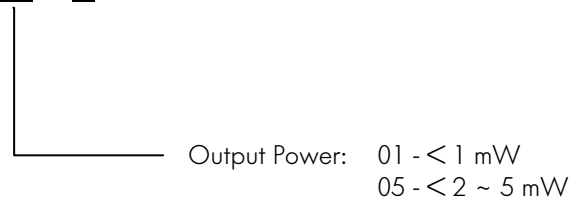

ABSOLUTE MAXIMUM RATINGS


Item	Symbol	Rating	Unit
Power supply voltage	V_{CC}	3.3	V
Laser Module optical output power	P_o	<4.5 mW	mW
Operation temperature	T_{opr}	-5 ~ 50	°C
Storage temperature	T_{stg}	-40 ~ 75	°C

ELECTRICAL AND OPTICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$)

Item	Symbol	Min.	Typ.	Max	Unit	Condition	
Wavelength	λ	630	634	640	nm	$P_o = 3 \text{ mW}$	
Output power	P_{out}	01	-	0.6	0.9	mW	$V_{cc} = 3 \text{ V}$
		05	2.2	-	3.0	mW	$V_{cc} = 3 \text{ V}$
Operation current	I_{op}	30	40	50	mA	$P_o = 3 \text{ mW}$ $V_{cc} = 3 \text{ V}$	
Operation voltage	V_{op}	2.5	-	3.3	Volt		
Laser Beam spot size at 10 m				<8 mm			
Divergence angle				0.9 mrad			
Mean time to failure (MTTF) 3 mW 25°C				>5000 hrs			



OUTLINE DIMENSIONS (UNITS: mm)

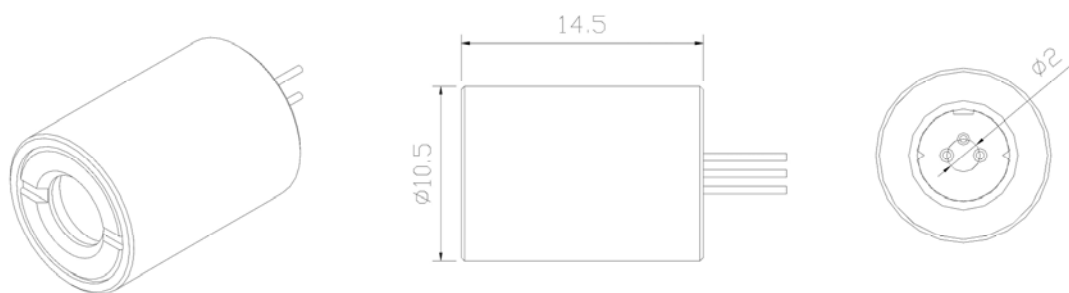

PIN ASSIGNMENT:



A type: Heat sink stand (-)

Pin 1: V_{cc}
Pin 2: GND
Pin 3: NC

07/09 / V4 / HW / divers-opto/module/ lc-lmd-635-05.doc

