



SIRIUS, EXPANSION MODULE 3RK33 FOR 3RK3
 MODULAR SAFETY SYSTEM 8 DI, 24V DC
 PARAMETERIZABLE VIA SW MSS ES 22.5MM WIDTH
 SCREW-TYPE TERMINAL WITHOUT CONNECTING
 CABLE

General technical data:

product brand name		SIRIUS
Product designation		Modular Safety System 3RK3
Design of the product		Expansion module 8 DI
Protection class IP		IP20
Shock resistance		15g / 11 ms
Degree of pollution		3
mounting position		vertical
Installation altitude at height above sea level maximum	m	2 000
Ambient temperature		
• during storage	°C	-40 ... +85
• during operation	°C	-20 ... +60
• during transport	°C	-40 ... +85
Relative humidity during operation	%	10 ... 95
Conducted interference due to burst acc. to IEC 61000-4-4		2 kV (power ports)
Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5		2 kV
Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5		1 kV
Electrostatic discharge acc. to IEC 61000-4-2		4 kV contact discharge / 8 kV air discharge
Field-bound parasitic coupling acc. to IEC 61000-4-3		10 V/m, 3 V/m, 1 V/m
Surge voltage resistance Rated value	V	500
Insulation voltage Rated value	V	50

Equipment marking acc. to DIN 40719 extended according to IEC 204-2 acc. to IEC 750		K
Equipment marking acc. to DIN EN 61346-2		K
Product function		
• EMERGENCY OFF function		No
• protective door monitoring		No
• evaluation: electro-sensitive protective equipment		No
• evaluation: selector switch		No
• Pressure-sensitive mat monitoring		No
• evaluation: two-hand operator panel		No
• evaluation: enabling switch		No
• monitored start-up		Yes

Control circuit/ Control:

Type of voltage		DC
Control supply voltage 1 for DC Rated value	V	24
Operating range factor control supply voltage rated value of the magnet coil		0.85 ... 1.15

Auxiliary circuit:

Product function		
• Parameterizable outputs		No
Number of inputs		
• safety-related		0
• non-safety-related		8
Number of outputs		
• as contact-affected switching element safety-related		
— 1-channel		0
— 2-channel		0
• as contact-less semiconductor switching element		
— safety-related 2-channel		0
— non-safety-related 2-channel		0
• for testing contact-based sensors		0

Installation/ mounting/ dimensions:

Mounting type		standard rail
Width	mm	22.5
Height	mm	102
Depth	mm	124

Connections/ Terminals:

Product function removable terminal for auxiliary and control circuit		Yes
Type of electrical connection for auxiliary and control current circuit		screw-type terminals
Connectable conductor cross-section for auxiliary contacts		
<ul style="list-style-type: none"> • single or multi-stranded 	mm ²	0.5 ... 4
<ul style="list-style-type: none"> • finely stranded — with core end processing 	mm ²	0.5 ... 2.5

Certificates/ approvals:

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



[other](#)

Declaration of Conformity	Test Certificates	other
---------------------------	-------------------	-------



[Special Test Certificate](#)

[Confirmation](#)

[Environmental Confirmations](#)

Safety related data:

Protection against electrical shock	finger-safe
-------------------------------------	-------------

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator




<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK33211AA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RK33211AA10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

<http://www.automation.siemens.com/bilddb/index.aspx?attID9=3RK33211AA10&lang=en>

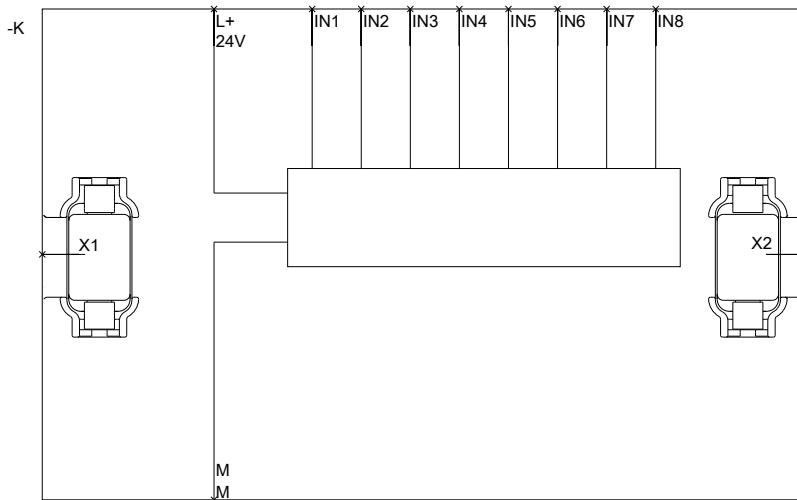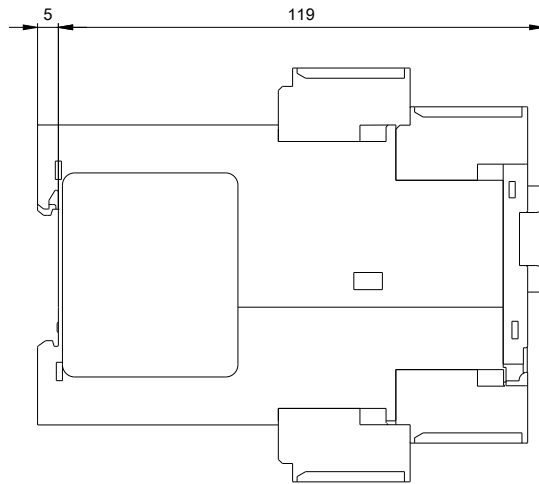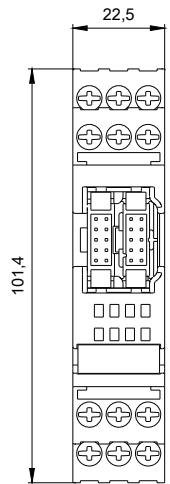

last modified:

15.01.2015