

**Adapter for MSC-R, 32 A**

**Part no.** MSFAR-32  
**Catalog No.** 191101  
**Eaton Catalog No.** MSFR-32




**Delivery program**

Product range			Accessories
Accessories			Busbar adapters
			Approved to UL 508
Rated operational voltage	U <sub>e</sub>	V	690
Rated operational current	I <sub>e</sub>	A	32
Terminal capacity			AWG 10 (6 mm <sup>2</sup> )
Adapter width		mm	90
Adapter length		mm	240
DIN rail		Quantity	1
For use with			MSC-R, 32 A

**Technical data ETIM 6.0**

Low-voltage industrial components (EG000017) / Busbar adapter (EC001531)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Busbar trunking system (LV circuitry) / Busbar adapter (low-voltage switching technology) (ecI@ss8.1-27-37-03-04 [ACN951008])			
Mounting rail armament			1 mounting rail
Type of electrical connection			Round conductor
Rated current I <sub>n</sub>		A	32
Min. busbar thickness		mm	2
Max. busbar thickness		mm	2
Width of the adapter		mm	90
Rail width		mm	24
Busbar distance		mm	60

## Dimensions

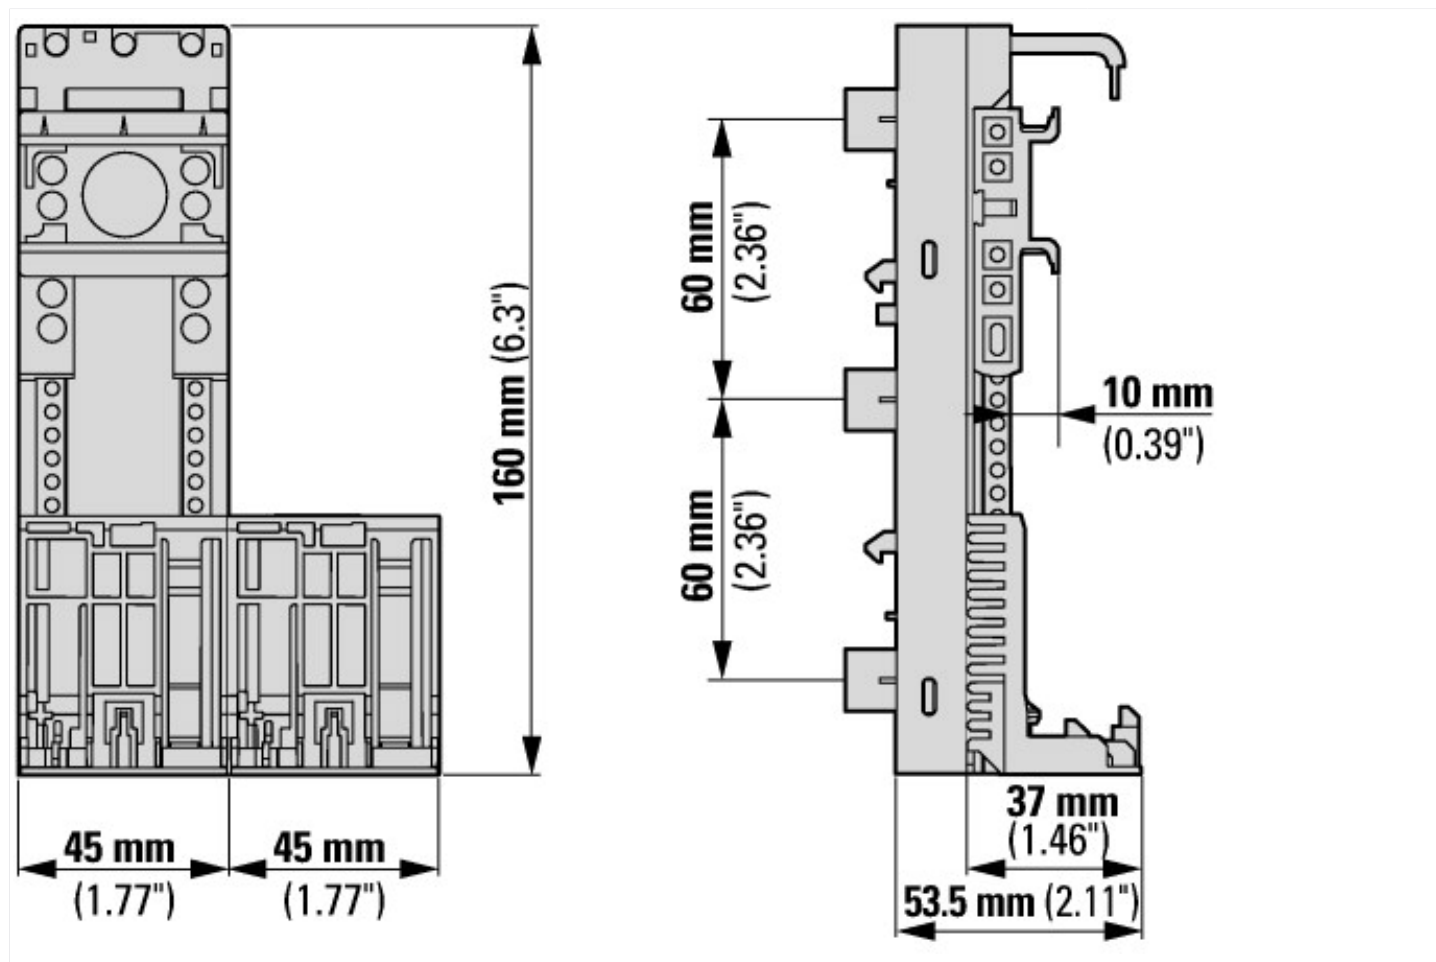

## Additional product information (links)

### IL015082ZU Adapter

IL015082ZU Adapter [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL015082ZU2017\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL015082ZU2017_05.pdf)

Motor starters and "Special Purpose Ratings" for the North American market [http://www.moeller.net/binary/ver\\_techpapers/ver953en.pdf](http://www.moeller.net/binary/ver_techpapers/ver953en.pdf)

Busbar Component Adapters for modern Industrial control panels [http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)