




COBAwash®

A real asset in floor protection for domestic and commercial use

- Easy to clean, practical and machine washable.
- Easy care, smaller sizes* can be washed in a domestic washing machine. (All sizes can be washed in an industrial washing machine.)
- Carpet pile can retain up to 3.5 litres/ m2 of moisture.
- Also traps up to 800g of debris/dry dust.
- Bleach and fade resistant – 11-year warranty against significant colour loss.



Styles Available

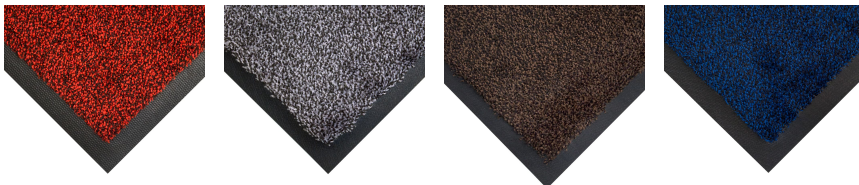

Red

Grey

Brown

Blue

Parts

Part Number	Size	Colour	Weight
LM010201	0.6 m x 0.85 m	Black/Blue	1.25 kg
LM010301	0.6 m x 0.85 m	Black/Red	1.25 kg
LM010501	0.6 m x 0.85 m	Black/Brown	1.25 kg
LM010601	0.6 m x 0.85 m	Black/Steel	1.25 kg
LM010204	0.85 m x 1.2 m	Black/Blue	2.40 kg
LM010304	0.85 m x 1.2 m	Black/Red	2.40 kg
LM010504	0.85 m x 1.2 m	Black/Brown	2.40 kg
LM010604	0.85 m x 1.2 m	Black/Steel	2.40 kg
LM010202	0.85 m x 1.5 m	Black/Blue	3.00 kg
LM010302	0.85 m x 1.5 m	Black/Red	3.00 kg
LM010502	0.85 m x 1.5 m	Black/Brown	3.00 kg

Technical Specification

Material	PA
Backing	NBR
Surface Finish	Straight set
Product Height	8 mm
Product Weight	2.3kg/ m2
Roll Length	N/A
Mat Edge	NBR 20 mm
Pile Weight	0.65Kg/ m2
Operating Temperature	0°C to +60°C

Parts

LM010602	0.85 m x 1.5 m	Black/Steel	3.00 kg
LM010203	1.15 m x 1.75 m	Black/Blue	4.75 kg
LM010303	1.15 m x 1.75 m	Black/Red	4.75 kg
LM010503	1.15 m x 1.75 m	Black/Brown	4.75 kg
LM010603	1.15 m x 1.75 m	Black/Steel	4.75 kg

Technical Specification

Resistance to Chemicals Rubber is resistant to many chemicals, alkalis, detergents and general industrial chemicals. Rubber may swell in polar solvents.

Environmental Resistance Suitable for indoor environments

UV Resistance No

Typical Applications Entrance areas

Installation Method Loose lay

Cleaning Method 0.6 m x 0.85 m and 0.85 m x 1.2 m can be washed in standard domestic washing machines. All other sizes can be laundered in commercial washing machines.

Country of Origin UK

Guarantee 2 years against manufacturing defects. 11 year against colour loss, subject to washing instructions being adhered too.

Colour fastness to light 5

Colour fastness to rubbing, wet and dry: 5

Colour fastness to water 5

Colour fastness to soiling 5

Electrostatic charging: ISO 6356 (2012) Determination of the static electrical propensity walking test - 0.3kVolts