


1N4001GP THRU 1N4007GP

GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 1000 Volts **Forward Current - 1.0 Ampere**

PATENTED*

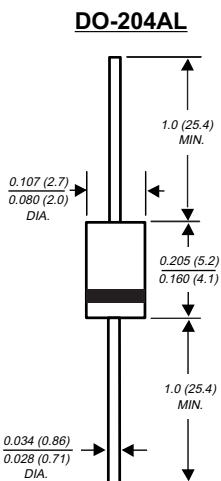

NOTE: Lead diameter is $\frac{0.026}{0.023}$ (0.66 / 0.58) mm for suffix "E" part numbers

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306



FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 1.0 Ampere operation at $T_A=75^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AL molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	1N 4001GP	1N 4002GP	1N 4003GP	1N 4004GP	1N 4005GP	1N 4006GP	1N 4007GP	UNITS
* Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
* Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
* Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$					1.0			Amp
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}					30.0			Amps
Maximum instantaneous forward voltage at 1.0A	V_F				1.1				Volts
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length $T_A=75^\circ\text{C}$	$I_{R(AV)}$				30.0				μA
* Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=125^\circ\text{C}$	I_R				5.0				μA
Typical reverse recovery time (NOTE 1)	t_{rr}				2.0				μs
Typical junction capacitance (NOTE 2)	C_J				8.0				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$				55.0				$^\circ\text{C/W}$
* Operating junction and storage temperature range	T_J , T_{STG}				-65 to +175				$^\circ\text{C}$

NOTES:

(1) Reverse recovery test conditions: $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

*JEDEC registered values

RATINGS AND CHARACTERISTIC CURVES 1N4001GP THRU 1N4007GP

FIG. 1 - FORWARD CURRENT DERATING CURVE

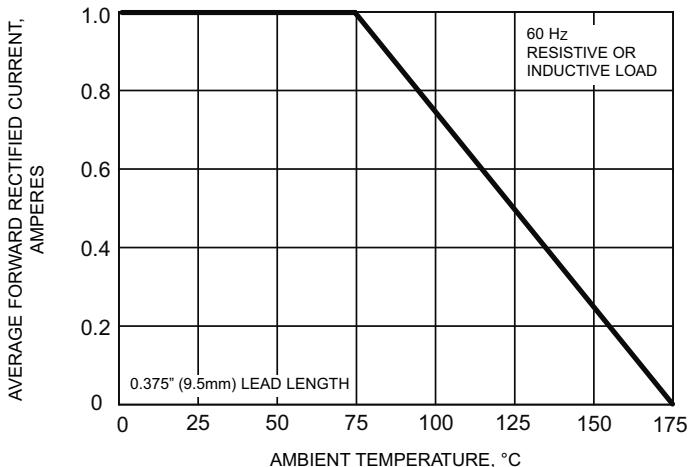


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

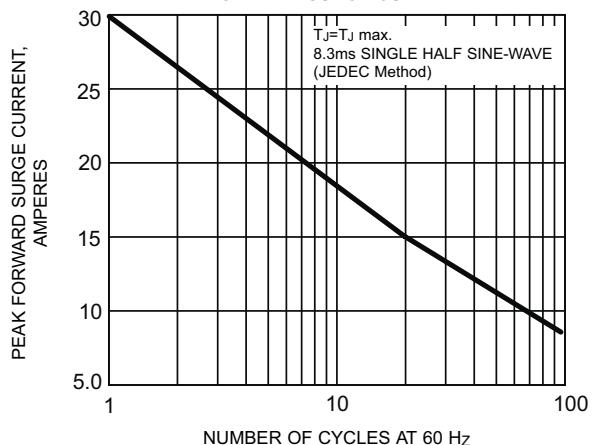


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

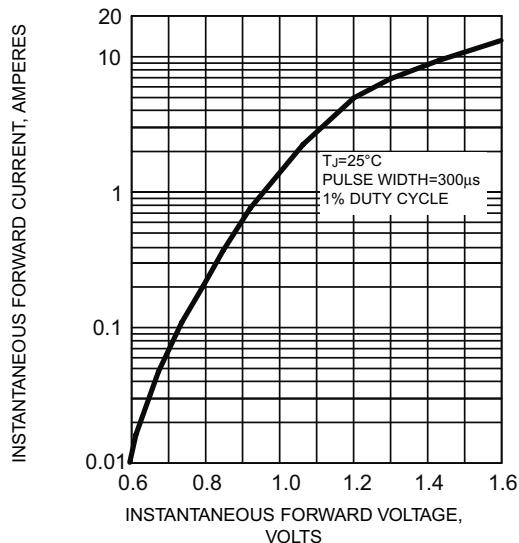


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

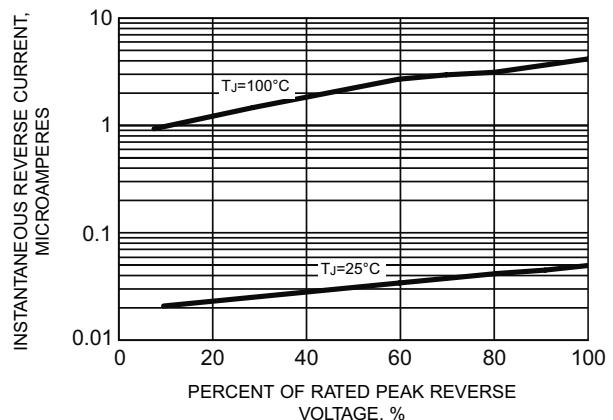


FIG. 5 - TYPICAL JUNCTION CAPACITANCE

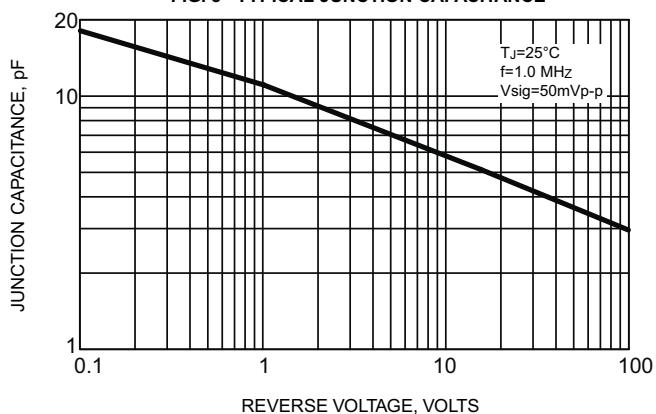


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

