


**RoHS
Compliant**





Features

- 6.6mm × 7.1mm foot Print, 3mm Max. height SMD Power Inductor for high frequency application.
- High saturation current characteristics by distributed gapped metal dust core.
- Ideal for computers servers, workstations, VGA card, Telecommunication Equipment, voltage-regulator modules & High Density DC to DC converter Board.
- Lower DC resistance for higher current application.
- Tape & Reel Quantity: 1,000 piece per 13 inches reel.
- Operating Temperature Range -55°C to + 125°C.

Dimensions : Millimetres

Mechanical Dimensions

Electrical Characteristics:

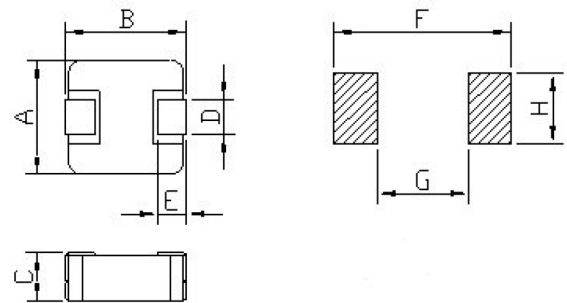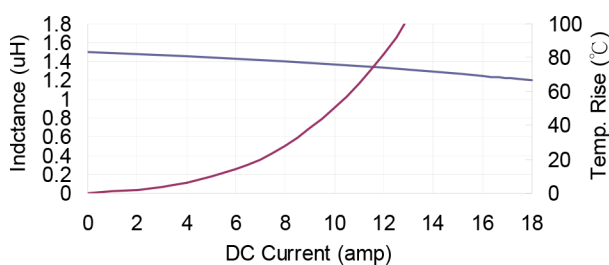

A ±	B ±	C	D ±	E ±	F	G	H
0.20	0.30	Max	0.30	0.50	Ref	Ref	Ref
6.60	7.10	3.00	3.00	1.60	7.40	3.70	3.50

Notes:

1. Open Circuit Inductance(OCL) and $L@I_{rms}$ and $L@I_{sat}$ are measured at: 100KHz, 1.0V ;($T_a=25^\circ C$).
2. I_{sat} : DC current that causes inductance to drop approximately by 30% from OCL ;($T_a=25^\circ C$).
3. I_{rms} : DC current for an approximate temperature rise of 40°C without core loss. Derating is necessary for AC currents, PCB pad layout, trace thickness and width, air-flow and proximity of other heat generating components will affect the temperature rise. It is recommended the part temperature not exceed 125°C under worst case operating conditions verified in the end application.
4. Inductance vs. DC Current vs. Temperature Curve, please see the next page to get more detail information.

Part Number	OCL Inductance (uH) ±20%	DCR (mΩ) Typ.	DCR (mΩ) Max.	I_{rms} (AMP)	I_{sat} (AMP)
MP006796	1.5	14	15	9	18

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro