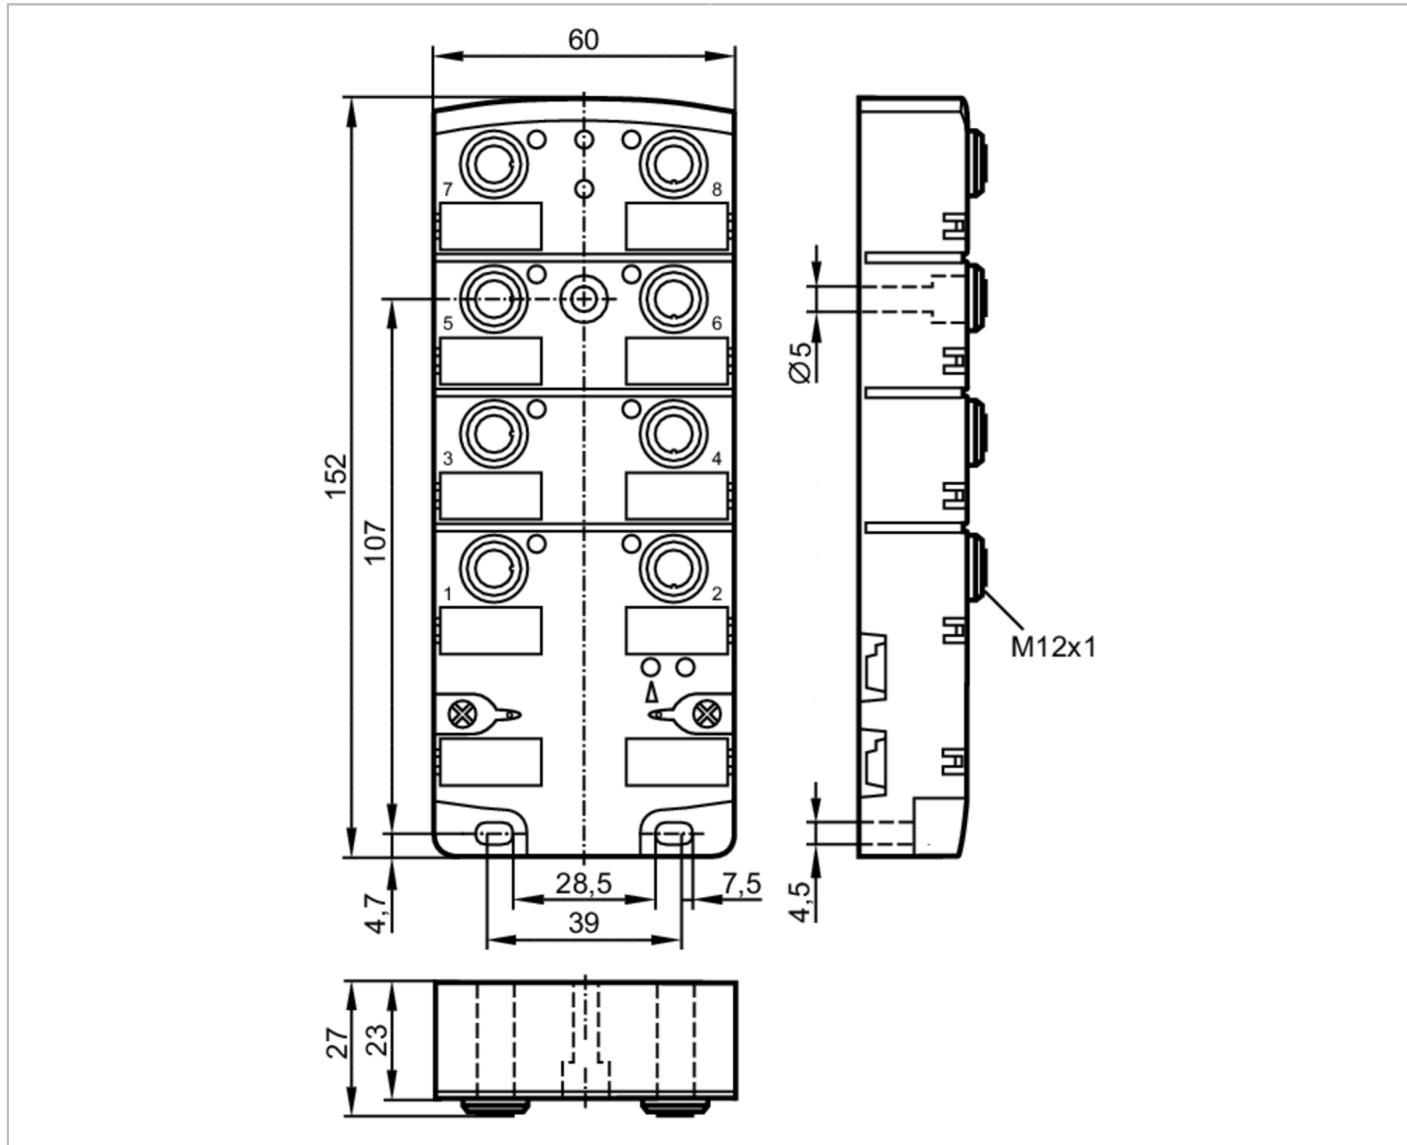


AS-Interface CompactLine module

CompactLM12 4DI-Y 4DO T



Electrical data

| | | |
|------------------------------------|------|---|
| Operating voltage | [V] | 26.5...31.6 DC; ("supply class 2" to cULus) |
| Max. current consumption from AS-i | [mA] | 250 |
| Max. current load total | [A] | 4 |
| Additional voltage supply | [V] | 10...30 DC; (AUX) |
| Integrated watchdog | | yes |

Inputs / outputs

| | |
|------------------------------|---|
| Number of inputs and outputs | Number of digital inputs: 4; Number of digital outputs: 4 |
|------------------------------|---|

AC2459



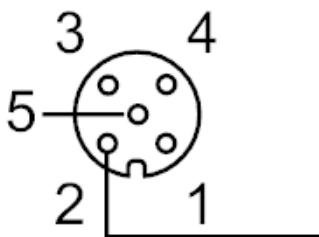

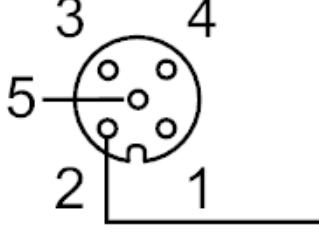

AS-Interface CompactLine module

CompactLM12 4DI-Y 4DO T

| Inputs | | | | | |
|---|----------|----------|---|-------|-------------|
| Number of digital inputs | | | 4 | | |
| Input circuit of digital inputs | | | PNP | | |
| Sensor supply of the inputs | | | AS-i | | |
| Voltage supply | [V] | | 20...30 | | |
| Max. total current rating of inputs | [mA] | | 200 | | |
| Input current limitation | [mA] | | 15 | | |
| Input current High | [mA] | | 6...10 | | |
| Input current Low | [mA] | | 0...2 | | |
| Min. switching level high signal | [V] | | 11 | | |
| Digital inputs protected against short circuits | | | yes | | |
| Outputs | | | | | |
| Number of digital outputs | | | 4 | | |
| Circuit | | | PNP | | |
| Voltage range DC | [V] | | 10...30; (to PELV) | | |
| Max. current load per output | [mA] | | 2000; (utilisation category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1)) | | |
| Short-circuit proof | | | yes | | |
| Electrically separated | | | yes | | |
| Operating conditions | | | | | |
| Ambient temperature | [°C] | | -25...80 | | |
| Protection | | | IP 67; ("enclosure type 1" according to cULUS; when flat cables are used E7400x / E7401x) | | |
| Tests / approvals | | | | | |
| EMC | | EN 50295 | | | |
| AS-i classification | | | | | |
| AS-i version | | | 2.11 + 3.0 | | |
| AS-i addressing | | | IR addressing possible | | |
| Extended addressing mode possible | | | no | | |
| AS-i profile | | | S-7.F.E | | |
| AS-i I/O configuration | [hex] | | 7 | | |
| AS-i ID code | [hex] | | F.E | | |
| AS-i certificate | | | 40401 | | |
| Assignment of the data bits | data bit | D0 | D1 | D2 | D3 |
| | input | 1 | 2 | 3 | 4 |
| | socket | I-1/2 | I-1/2 / I-2 | I-3/4 | I-3/4 / I-4 |
| | pin | 4 | 2 4 | 4 | 2 4 |
| | Output | 1 | 2 | 3 | 4 |
| | socket | O-1 | O-2 | O-3 | O-4 |
| | pin | 4 | 4 | 4 | 4 |

AS-Interface CompactLine module


CompactLM12 4DI-Y 4DO T

| Mechanical data | | | | |
|---|--|-------------|--|--|
| Weight | [g] | 374 | | |
| Type of mounting | AS-i flat cables directly connectable | | | |
| Materials | PA; socket: brass nickel-plated; threaded inserts in the lower part: brass nickel-plated; O-ring: FKM; piercing contacts: CuSn6 nickel-plated and tin-plated | | | |
| Displays / operating elements | | | | |
| Display | operation | LED, green | | |
| | errors | LED, red | | |
| | function | LED, yellow | | |
| Accessories | | | | |
| Accessories (optional) | Stainless steel sleeve, for installation in case of high mechanical stress , E70402 | | | |
| Remarks | | | | |
| Pack quantity | 1 pcs. | | | |
| Electrical connection - Inputs | | | | |
| Connection | | | | |
| I-1/2  I-2  | | | | |
| I-3/4  I-4  | | | | |
| Inputs 1 Sensor supply + 2 data input - 3 Sensor supply - 4 data input + 5 functional earth (FE) | | | | |

Connector: 4 x M12

AS-Interface CompactLine module

CompactLM12 4DI-Y 4DO T



Electrical connection - Outputs

Outputs

| | |
|------|------------------------|
| 3 | external voltage AUX - |
| 4 | switching output |
| 5 | functional earth (FE) |
| 1, 2 | not used |

Connector: 4 x M12

