

DIL48/SSOP56 ZIF Flash-2 (ord.no. 70-0099)

- special adapter, assigned for AMD AM29BL802/162 Flash EPROMs in SSOP56 package
- operation (mechanical) life of ZIF socket - 10.000 actuations
- made in Slovakia

Ord. no	70-0099
Socket	ZIF SSOP56, ClamShell or open top type
Bottom	2 rows, 2x 24 pins, square, 0.6x0.6mm, rows spacing 600mil
Class	Specialized for
Subclass	EPROM/Flash



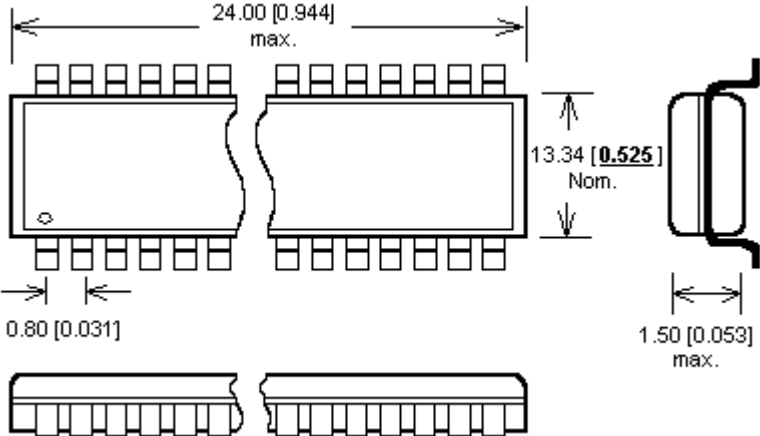
Adapter manual

- For ClamShell type of ZIF socket:
 - Insert adapter to the device programmer ZIF socket according to the picture placed near of it. If you have some doubts about orientation of this adapter in device programmer ZIF socket, it is valid general rule, the orientation of the text of title is the same as the text on the top of the device programmer.
 - Open the adapter ClamShell ZIF socket. Insert the device into it (place device on contacts). The right position of the programmed device in adapter ZIF socket is show at picture near (mainly left above) the adapter ZIF socket.
 - Visually check interconnection between device and adapter ClamShell ZIF socket. If everything looks OK, close it and now, device is ready for programming.
 - Be careful, because the incorrect insertion of adapter to the device programmer ZIF socket or device to the adapter ClamShell ZIF socket can damage the programmed device.
 - To take out the device, open adapter ClamShell ZIF socket and remove device from it.
 -
- For open top type of ZIF socket
 - Insert adapter to the device programmer ZIF socket according to the picture placed near of it. If you have some doubts about orientation of this adapter in device programmer ZIF socket, it is valid general rule, the orientation of the text of title is the same as the text on the top of the device programmer.
 - Push the top of adapter ZIF socket to open it. Insert the device into the adapter ZIF socket. The right position of the programmed device in adapter ZIF socket is show at picture near (mainly left above) the adapter ZIF socket. Then release adapter ZIF socket.
 - Visually check interconnection between device and adapter ZIF socket. If everything looks OK, the device is ready for programming.
 - Be careful, because the incorrect insertion of adapter to the device programmer ZIF socket or device to the adapter ZIF socket can damage the programmed device.
 - To take out the device push the top of adapter ZIF socket and remove device from it.
 -
 - When you finish work with adapter, remove it from the device programmer ZIF socket.
 - Do not directly touch the pins of the adapter and adapter ZIF socket, because dirt may cause errors during programming of device.
 - For handling with the device we recommended to use a vacuum pick up tool.

Software note

- If software version, you're using currently, doesn't contain support for this programming adapter, please download the latest version of software - Regular or OnDemand - from our web site.

Accepted package(s)

SSOP56	  Technical drawing of the SSOP56 package showing dimensions: - Top view: Overall width 24.00 [0.944] max. - Top view: Pin pitch 0.80 [0.031] - Top view: Pin width 1.50 [0.053] max. - Side view: Package height 13.34 [0.525] Nom.
-------------------	--