



PLUG-IN RELAY COMPACT UNIT 24V DC, 4 CO LED  
MODULE RED SOCKET W. LOGIC ISOLATION PLUG-  
IN TERMINAL (PUSH-IN)

Figure similar

General technical data:

<b>Type of voltage</b>		DC
<b>Control supply voltage</b>		
<ul style="list-style-type: none"> <li>• for DC Rated value</li> <li>— minimum</li> <li>— maximum</li> </ul>	V	24
	V	24
Number of NC contacts for auxiliary contacts		0
Number of NO contacts for auxiliary contacts		0
Number of CO contacts for auxiliary contacts		4
<b>Operating current of the auxiliary contacts</b>		
<ul style="list-style-type: none"> <li>• at DC-13</li> <li>— at 24 V</li> <li>• at AC-15</li> <li>— at 230 V</li> </ul>	A	6
	A	4
<b>Design of the switching function positively driven</b>		No
<b>Switching behavior</b>		monostable

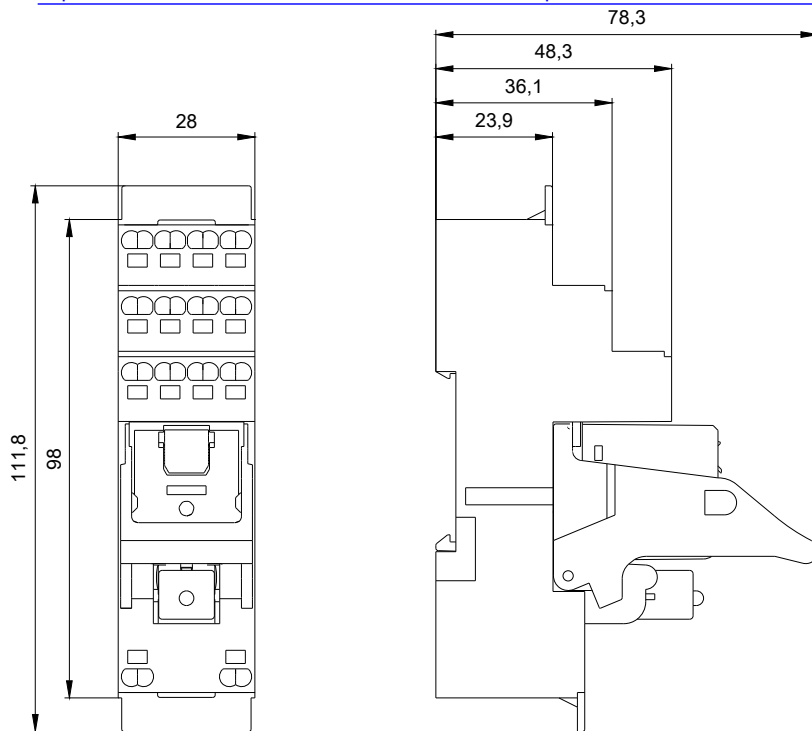
Mechanical data:

<b>Type of electrical connection</b>		spring-loaded terminals
<b>Design of the relay operating mechanism</b>		poled
<b>Product component Plug-in socket</b>		Yes
<b>Width</b>	mm	28
<b>Height</b>	mm	79
<b>Depth</b>	mm	98

Certificates/ approvals:



## Further information

**Industry Mall (Online ordering system)**<http://www.siemens.com/industrymall>**Cax online generator**<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=LZS:PT5D5L24>**Information- and Downloadcenter (Catalogs, Brochures,...)**<http://www.siemens.com/industrial-controls/catalogs>**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**<https://support.industry.siemens.com/cs/ww/en/ps/LZS:PT5D5L24>**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=LZS:PT5D5L24&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=LZS:PT5D5L24&lang=en)

last modified:

W9 4444: LZS:PT2D5L24\_ALL  
W9 3333: LZS:PT2D5L24\_ALL  
15.01.2015