
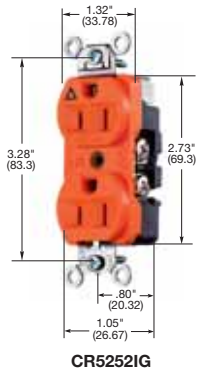
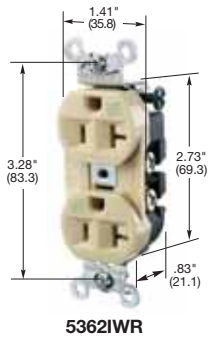
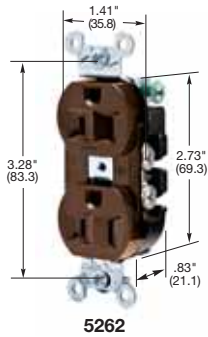



Straight Blade Devices
15 and 20 Ampere, 125 Volts
 2 Pole, 3 Wire Grounding
Hubbell-Pro Series Receptacles



Receptacles

Hubbell-Pro Heavy Duty, Specification Grade, Duplex, Back and Side Wired

Description	Color	Catalog Numbers	
Finder groove nylon face.	Almond	5262AL	5362AL
	Black	5262BLK	5362BLK
	Blue	-	5362BL
	Brown	5262B	5362B
	Gray	5262G	5362G
	Ivory	5262I	5362I
	Light Almond	5262LA	5362LA
	Office White	5262OW	5362OW
	Red	5262R	5362R
	White	5262W	5362W
	Weather resistant, finder groove nylon face.	Black	5262BKWR
Brown		5262WR	5362WR
Gray		5262GYWR	5362GYWR
Ivory		5262IWR	5362IWR
White		5262WWR	5362WWR
Smooth nylon face.		Almond	5252AAL
	Black	5252ABLK	5352ABLK
	Brown	5252AB	5352AB
	Gray	5252AG	5352AG
	Ivory	5252AI	5352AI
	Light Almond	5252ALA	5352ALA
	Office White	5252AOW	5352AOW
	Red	5252AR	5352AR
	White	5252AW	5352AW
	Isolated ground. ⁽¹⁾	Black	CR5252IGBK
Blue		-	CR5352IGBL
Gray		CR5252IGGY	CR5352IGGY
Ivory		CR5252IGI	CR5352IGI
Orange		CR5252IG	CR5352IG
Office White		CR5252IGOW	CR5352IGOW
White		CR5252IGW	CR5352IGW

Notes: (1) See Section J for complete line of isolated ground devices.
 See page A-44 for accessories.
 See Section K for wallplates.
 Horsepower ratings listed above are AC only.
 See pages A-54 and A-55 for technical information.