

Unidirectional and Bidirectional Surface Mount Transient Voltage Suppressor



Features:

- Rating to 400V V_{BR}
- For surface mounted applications
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has UL recognition 94V-0
- Typical IR less than 1 μ A above 10V
- Fast response time : typically less than 1ns for Uni-direction, less than 5ns of Bi-direction, from 0 Volts to BV min

Mechanical Data:

Case	: Molded Plastic
Polarity	: Cathode band denotes uni-directional device No cathode band denotes bi-directional device
Weight	: 0.002 ounces, 0.093 grams
Reverse Voltage	: 4 to 440 Volts
Power Dissipation	: 600 Watts

Maximum Ratings and Electrical Characteristics:

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Characteristics	Symbol	Values	Unit
Peak Power Dissipation at $T_A = 25^\circ\text{C}$ TP = 1ms (Note 1, 2)	P_{PK}	600	Watts
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Super Imposed on Rated Load (JEDEC Method)	I_{FSM}	100	Amps
Steady State Power Dissipation at $T_L = 75^\circ\text{C}$	$P_{M(AV)}$	5	Watts
Max. Instantaneous Forward Voltage at 50A for Uni-Directional Devices Only (Note 3)	V_F	3.5 / 5	Volts
Typical Thermal Resistance Junction to Lead	$R_{\theta JL}$	20	°C/W
Typical Thermal Resistance Junction to Ambient	$R_{\theta JA}$	100	
Typical Junction Capacitance (Note 4)	C_J	2000	pF
Operating Temperature Range	T_J	-55 to +150	°C
Storage Temperature Range	T_{STG}		

Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25^\circ\text{C}$ per Fig. 1.
2. Thermal Resistance junction to Lead
3. $V_F < 3.5\text{V}$ for $V_{BR} \leq 200\text{V}$ and $V_F < 6.5\text{V}$ for $V_{BR} \geq 201\text{V}$
4. Measured at 1MHz and applied reverse voltage of 4V DC
5. The typical data above is for reference only

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro



Unidirectional and Bidirectional Surface Mount Transient Voltage Suppressor



Part Number		Marking		Reverse Stand off Voltage	Breakdown Voltage V _{BR} Volts @ I _T		Test Current I _T	Max. Clamping Voltage V _C @I _{PP}	Max. Reak Pulse Current	Max. Reverse Leakage at V _R
Uni.	Bi.	Uni.	Bi.	V _R (V)	Min. (V)	Max. (V)	@ I _T (mA)	V _C (V)	I _{PP} (A)	I _R (μA)
-	SMBJ13CA+	-	BG	13	14.4	15.9	1	21.5	28	1
SMBJ58A+	-	NG	-	58	64.4	71.2	1	93.6	6.5	1
	SMBJ7.0CA+	-	AM	7	7.78	8.6	10	12	50	200

Note: For Bidirectional type having V_{RWM} of 10 volts and less, the I_R limit is double.

Ratings and Characteristic Curves

FIG.1-PULSE DERATING CURVE

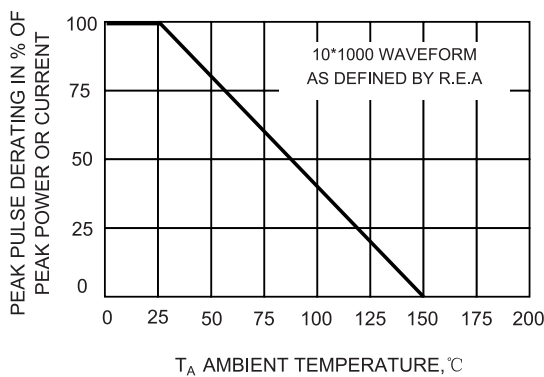


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

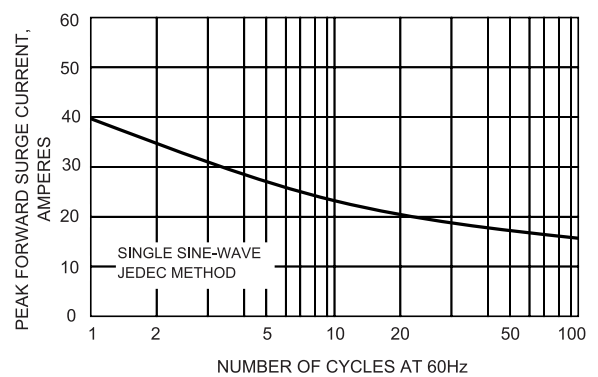


FIG.3-PULSE WAVEFORM


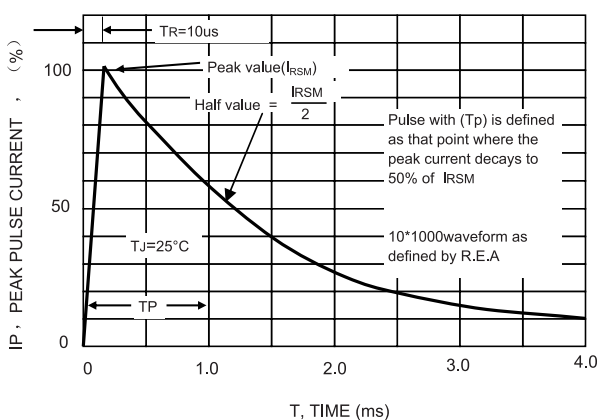


FIG.4-TYPICAL JUNCTION CAPACITANCE

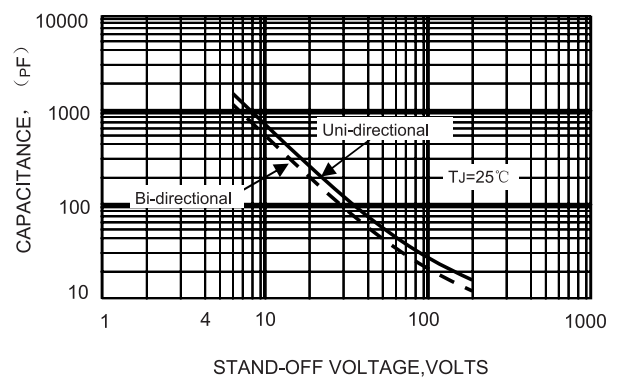

Unidirectional and Bidirectional Surface Mount Transient Voltage Suppressor



FIG.5-PULSE RATING CURVE




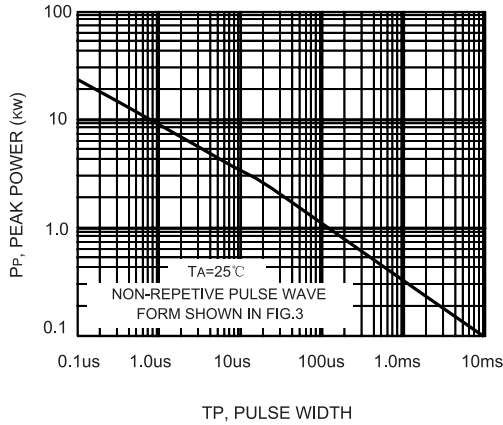


FIG.6-STEADY STATE POWER DERATING CURVE

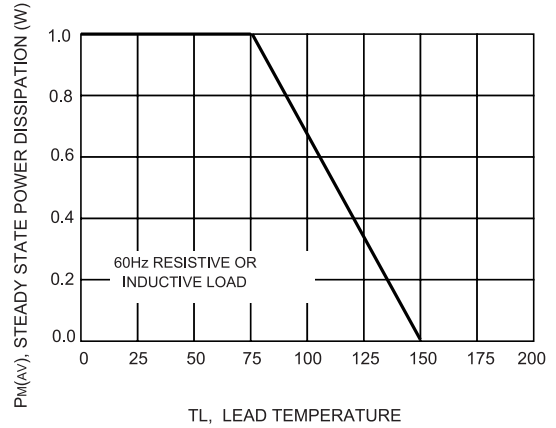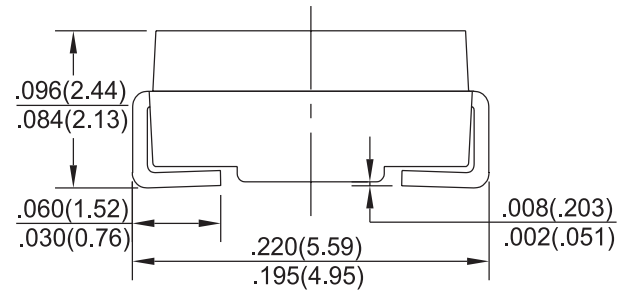

Dimensions:

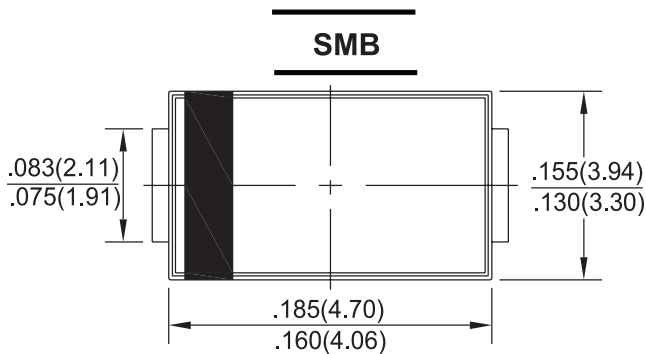

Dimensions : Inches (Millimetres)

Part Number Table

Description	Part Number
TVS - Diodes 600W 13V Bi-directional	SMBJ13CA+
Tvs - Diodes 600W 58V Unidirectional	SMBJ58A+
Tvs - Diodes 600W 7V Bi-Directional	SMBJ7.0CA+

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

