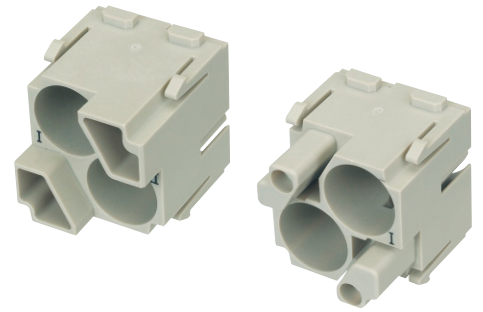





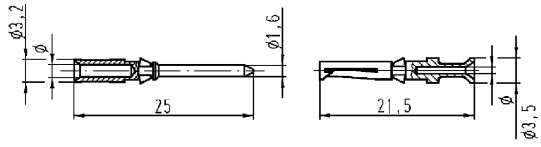

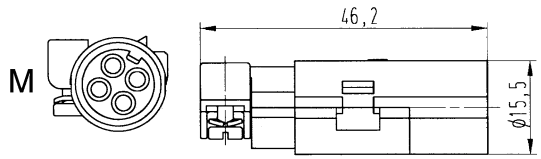
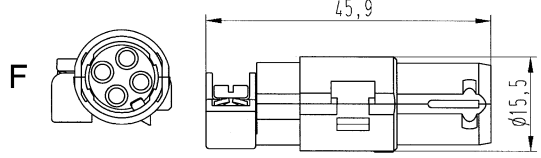

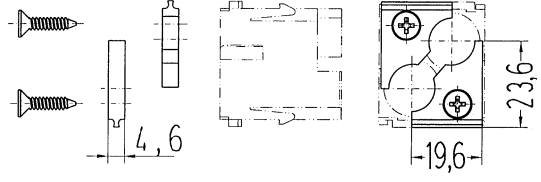


Number of contacts

# 2



| Identification  | Wire gauge (mm <sup>2</sup> )               | Part number  |  | Drawing   | Dimensions in mm |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
|---|---|--|--|---|------------------|---|------------------|---------------------------------------|--------|------|----------------------------|--------|------|-----------------------------|--------|------|--------------------------|---------|------|----------------------------|---------|------|----------------------------|---------|------|--|
|   |   | male   | female   |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| <p>Han-Modular®, Han-Quintax® module</p> <p>Crimp terminal</p>   |   | 09 14 002 3001   | 09 14 002 3101   | <p>M</p>  <p>F</p>  <p>Contact arrangement (view from termination side)</p>    |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| <p>Han D®</p> <p>Crimp contact, gold plated contacts, contact resistance ≤ 3 mOhm</p>                                      | 0.14-0.37<br>0.5<br>0.75<br>1<br>1.5<br>2.5 | 09 15 000 6124<br>09 15 000 6123<br>09 15 000 6125<br>09 15 000 6122<br>09 15 000 6121<br>09 15 000 6126 | 09 15 000 6224<br>09 15 000 6223<br>09 15 000 6225<br>09 15 000 6222<br>09 15 000 6221<br>09 15 000 6226 |  <table border="1"> <thead> <tr> <th>Wire gauge</th> <th>Ø</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>0.14 - 0.37 mm<sup>2</sup> AWG 26-22</td> <td>0.9 mm</td> <td>8 mm</td> </tr> <tr> <td>0.5 mm<sup>2</sup> AWG 20</td> <td>1.1 mm</td> <td>8 mm</td> </tr> <tr> <td>0.75 mm<sup>2</sup> AWG 18</td> <td>1.3 mm</td> <td>8 mm</td> </tr> <tr> <td>1 mm<sup>2</sup> AWG 18</td> <td>1.45 mm</td> <td>8 mm</td> </tr> <tr> <td>1.5 mm<sup>2</sup> AWG 16</td> <td>1.75 mm</td> <td>8 mm</td> </tr> <tr> <td>2.5 mm<sup>2</sup> AWG 14</td> <td>2.25 mm</td> <td>6 mm</td> </tr> </tbody> </table> | Wire gauge       | Ø | Stripping length | 0.14 - 0.37 mm <sup>2</sup> AWG 26-22 | 0.9 mm | 8 mm | 0.5 mm <sup>2</sup> AWG 20 | 1.1 mm | 8 mm | 0.75 mm <sup>2</sup> AWG 18 | 1.3 mm | 8 mm | 1 mm <sup>2</sup> AWG 18 | 1.45 mm | 8 mm | 1.5 mm <sup>2</sup> AWG 16 | 1.75 mm | 8 mm | 2.5 mm <sup>2</sup> AWG 14 | 2.25 mm | 6 mm |  |
| Wire gauge  | Ø   | Stripping length   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| 0.14 - 0.37 mm <sup>2</sup> AWG 26-22   | 0.9 mm                                      | 8 mm   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| 0.5 mm <sup>2</sup> AWG 20  | 1.1 mm                                      | 8 mm   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| 0.75 mm <sup>2</sup> AWG 18   | 1.3 mm                                      | 8 mm   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| 1 mm <sup>2</sup> AWG 18  | 1.45 mm                                     | 8 mm   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| 1.5 mm <sup>2</sup> AWG 16  | 1.75 mm                                     | 8 mm   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| 2.5 mm <sup>2</sup> AWG 14  | 2.25 mm                                     | 6 mm   |  |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| <p>Han-Quintax® contact</p> <p>4 + shielding, for Han D® crimp contacts</p>  <p>Please order crimp contacts separately</p> |   | 09 15 004 3013   | 09 15 004 3113   | <p>M</p>  <p>F</p>    |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |
| <p>Han-Quintax® Adapter</p>  <p>optional</p>   |   | 09 14 000 9915   | 09 14 000 9915   |   |                  |   |                  |                                       |        |      |                            |        |      |                             |        |      |                          |         |      |                            |         |      |                            |         |      |  |