


# IT5002



## Inductive sensor

ITB3001-APKG

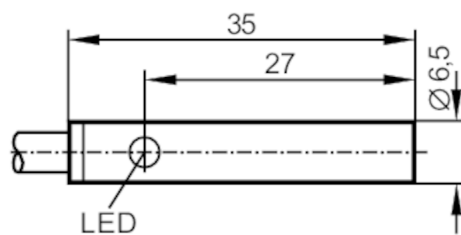

### Product characteristics

Electrical design	PNP
Output function	normally closed
Sensing range [mm]	1
Housing	cylindrical
Dimensions [mm]	Ø 6.5 / L = 35

### Electrical data

Operating voltage [V]	10...36 DC
Current consumption [mA]	15; (24 V)
Protection class	III
Reverse polarity protection	yes

### Outputs

Electrical design	PNP
Output function	normally closed
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	200
Switching frequency DC [Hz]	900
Short-circuit protection	yes
Overload protection	yes

### Detection zone

Sensing range [mm]	1
Real sensing range $S_r$ [mm]	$1 \pm 10\%$
Operating distance [mm]	0...0.8
Increased sensing range	no

### Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis [% of $S_r$ ]	1...15
Switch point drift [% of $S_r$ ]	-10...10

### Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

# IT5002



## Inductive sensor

ITB3001-APKG

### Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class B
MTTF	[years]	5623

### Mechanical data

Weight	[g]	51
Housing		cylindrical
Mounting		flush mountable
Dimensions	[mm]	Ø 6.5 / L = 35
Materials		brass white bronze coated; PBT

### Displays / operating elements

Display	operation	1 x LED, yellow
---------	-----------	-----------------

### Accessories

Accessories (supplied)	Mounting clamps: 1
------------------------	--------------------


### Remarks

Pack quantity	1 pcs.
---------------	--------

### Electrical connection

Cable: 2 m, PVC; 3 x 0.14 mm<sup>2</sup>

### Connection

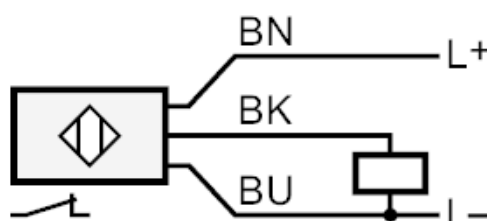

Core colours :

- BN = brown
- BU = blue
- BK = black