


Number of contacts

# 3

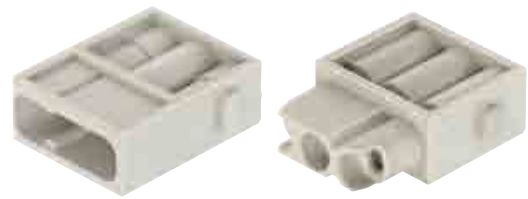

Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
<b>Crimp terminal</b> Order crimp contacts separately	<b>09 14 003 3001</b>	<b>09 14 003 3101</b>	<p>M</p> <p>F</p> <p>Contact arrangement view from termination side</p>	

Han Modular

Identification	Wire gauge (mm <sup>2</sup> )	Part number		Drawing	Dimensions in mm																								
		Male contact	Female contact																										
<b>Crimp contacts</b> Power contacts silver plated																													
	1.5 2.5 4 6 10	<b>09 32 000 6104</b> <b>09 32 000 6105</b> <b>09 32 000 6107</b> <b>09 32 000 6108</b> <b>09 32 000 6109</b>	<b>09 32 000 6204</b> <b>09 32 000 6205</b> <b>09 32 000 6207</b> <b>09 32 000 6208</b> <b>09 32 000 6209</b>	<table border="1"> <thead> <tr> <th colspan="2">Wire gauge</th> <th>∅</th> <th>Stripping length</th> </tr> </thead> <tbody> <tr> <td>1.5 mm<sup>2</sup></td> <td>AWG 16</td> <td>1.75</td> <td>9.5 mm</td> </tr> <tr> <td>2.5 mm<sup>2</sup></td> <td>AWG 14</td> <td>2.25</td> <td>9.5 mm</td> </tr> <tr> <td>4 mm<sup>2</sup></td> <td>AWG 12</td> <td>2.85</td> <td>9.5 mm</td> </tr> <tr> <td>6 mm<sup>2</sup></td> <td>AWG 10</td> <td>3.5</td> <td>9.5 mm</td> </tr> <tr> <td>10 mm<sup>2</sup></td> <td>AWG 8</td> <td>4.3</td> <td>12 mm</td> </tr> </tbody> </table>	Wire gauge		∅	Stripping length	1.5 mm <sup>2</sup>	AWG 16	1.75	9.5 mm	2.5 mm <sup>2</sup>	AWG 14	2.25	9.5 mm	4 mm <sup>2</sup>	AWG 12	2.85	9.5 mm	6 mm <sup>2</sup>	AWG 10	3.5	9.5 mm	10 mm <sup>2</sup>	AWG 8	4.3	12 mm	
Wire gauge		∅	Stripping length																										
1.5 mm <sup>2</sup>	AWG 16	1.75	9.5 mm																										
2.5 mm <sup>2</sup>	AWG 14	2.25	9.5 mm																										
4 mm <sup>2</sup>	AWG 12	2.85	9.5 mm																										
6 mm <sup>2</sup>	AWG 10	3.5	9.5 mm																										
10 mm <sup>2</sup>	AWG 8	4.3	12 mm																										

Stock items in bold type