






**RoHS
Compliant**



Specifications

Current Rating	: 15 Amp AC300V
Insulation withstands Volt	: AC2000V min.
Insulation Resistance	: >2000MΩ DC500V
Operation Temperature	: -40°C to +120°C
Wire Range	: 14AWG to 22AWG
Screw Torque	: 12lb-inch

Diagram

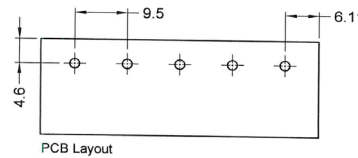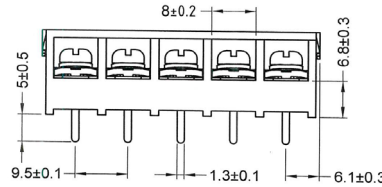

Dimensions : Millimetres

Pitch: 9.5mm			
Poles	A	B	C
2	21.7mm	20.2mm	9.5mm
3	31.2mm	29.7mm	19mm
5	50.2mm	48.7mm	38mm
7	69.2mm	67.7mm	57mm
9	88.2mm	86.7mm	76mm

SL	Material		Plating/Finish	Remark
1	Insulating Body	PBT(UL94V-0)	-	Black
2	Terminal	Brass	Tin Plated	-
3	Screw	Steel	Ni Plated	-
4	Cover	PC	-	-

Part Number Table

Description	Part Number
Barrier Terminal Block, 9.5mm, 15A 300V, with cover, 2 Poles	MC002092
Barrier Terminal Block, 9.5mm, 15A 300V, with cover, 3 Poles	MC002093
Barrier Terminal Block, 9.5mm, 15A 300V, with cover, 5 Poles	MC002094
Barrier Terminal Block, 9.5mm, 15A 300V, with cover, 7 Poles	MC002095
Barrier Terminal Block, 9.5mm, 15A 300V, with cover, 9 Poles	MC002096

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro