


# VNA001



## Vibration sensor

VIBRATION SENSOR

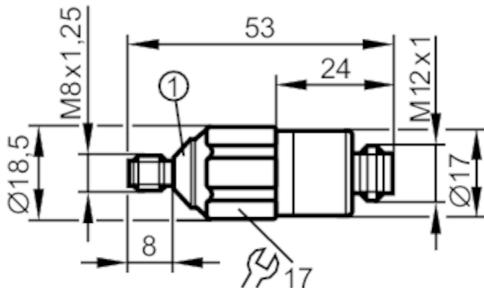

1 conical angle = 90°



### Product characteristics

Measuring range of vibration [g]	-25...25
Frequency range [Hz]	0...6000
Measuring principle	capacitive

### Application

Design	for connection to vibration sensor VNB211
Application	vibration detection

### Electrical data

Operating voltage [V]	7.2...30 DC
Current consumption [mA]	< 15
Min. insulation resistance [ $M\Omega$ ]	100; (500V DC)
Protection class	III
Reverse polarity protection	yes
Sensor type	microelectromechanical system (MEMS)

### Outputs

Analogue current output [mA]	0...10
Max. load [ $\Omega$ ]	300

### Measuring/setting range

Measuring range of vibration [g]	-25...25
Frequency range [Hz]	0...6000
Measuring principle	capacitive
Sensitivity [ $\mu\text{A/g}$ ]	142
Number of measurement axes	1

### Accuracy / deviations

Linearity deviation	0,2 %
---------------------	-------

### Operating conditions

Ambient temperature [ $^{\circ}\text{C}$ ]	-30...125
Note on ambient temperature	cULus: < 70 °C
Storage temperature [ $^{\circ}\text{C}$ ]	-30...125
Protection	IP 67; IP 68; IP 69K

# VNA001



## Vibration sensor

VIBRATION SENSOR

Tests / approvals		
EMC		EN 61000-6-2 EN 61000-6-3 EN 50178
Shock resistance		DIN EN 60068-2-27
Vibration resistance		DIN EN 60068-2-20
MTTF	[years]	1818
Mechanical data		
Weight	[g]	49
Type of mounting		M8 x 1,25
Materials		housing: stainless steel (1.4404 / 316L)
Tightening torque	[Nm]	8
Mechanische Überlastfestigkeit	[g]	500
Accessories		
Accessories (optional)		washers: 5, conical, E30115
Remarks		
Pack quantity		1 pcs.
Electrical connection		
1		L+ (7.2...30 V DC)
2		I out
3		GND
4		Test
Connector: 1 x M12; Maximum cable length: 250 m		
		