# Locating / Seating Pins • DIN 6321 22630.0053



# **Product Description**

Cylindric locating pins for locating workpieces in toleranced holes and also to be used as stops and feet.


Flattened locating pin used to overcome differences in tolerances, between holes or to position an element in one direction only.

The bearing surface of the seating pin has no centre (picture 1).

#### **Material**

Tool steel, hardened, ground


# Drawing

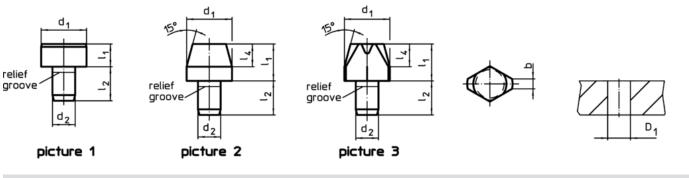

# **Order information**

Dimensions						Location hole	<b>I</b>	Art. No.
d₁ g6	l <sub>1</sub>	b	<b>d₂</b> n6	l <sub>2</sub>	I <sub>4</sub>	<b>D</b> <sub>1</sub> H7	-	
[mm]						[mm]	[9]	
locating pin, flat	tened, DIN 6321,	form C – pict	ure 3					
	25		12	18			72	22630.0053

# **Application example**

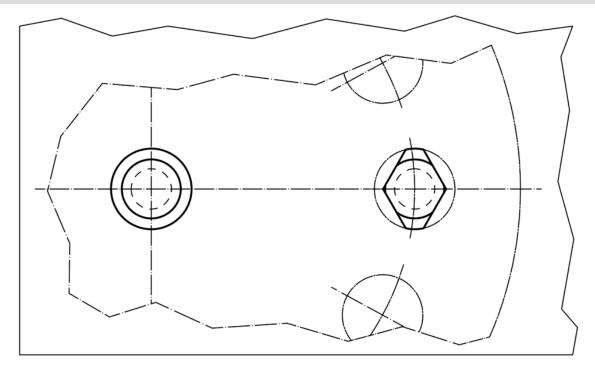

#### Compliance

#### **RoHS compliant**

Compliant according to Directive 2011/65/EU and Directive 2015/863

#### Does not contain SVHC substances

No SVHC substances with more than 0.1% w/w contained - SVHC list [REACH] as of 10.06.2022

#### Does not contain Proposition 65 substances No Proposition 65 substances included

https://www.P65Warnings.ca.gov/

### Free from Conflict Minerals

This product does not contain any substances designated as "conflict minerals" such as tantalum, tin, gold or tungsten from the Democratic Republic of Congo or adjacent countries.