




TECHNISCHE EIGENSCHAFTEN



EN388

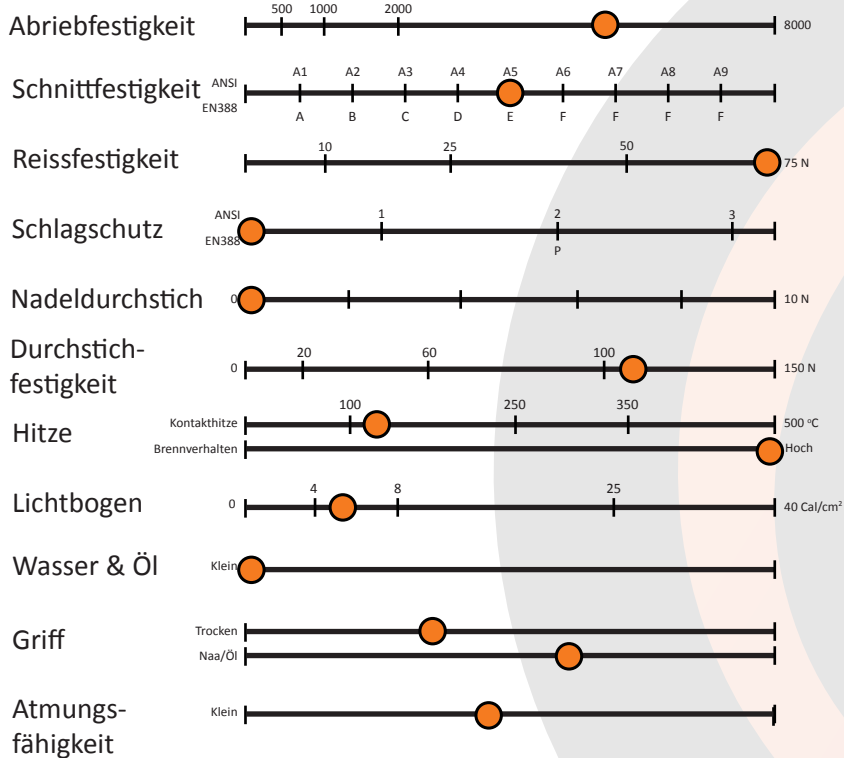

3X43E


EN407



41324X

ARC FLASH

ASTM F2675, ATPV=
5,9 Cal/cm² (handrücken)
30 Cal/cm² (handfläche)
NFPA 70E=
Level 2



ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | ≥ 22 N
F | > 30 N



Art.nr: 13-4HFR
60 paar (5 dutzend)/Karton