PHILIPS Lighting



MSD Platinum (Touring/Stage)

MSD Platinum 14 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Correlated Color Temperature (Nom)	7800 K
Cap-Base	-[-]		
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Main Application	Stage/Touring	Power (Nom)	280 W
Life to 50% Failures (Nom)	2000 h		
System Description	Reflector-E20.6	Controls and Dimming	
		Dimmable	Yes
ight Technical			
Color Code	2	Mechanical and Housing	
Luminous Flux (Nom)	12350 lm	Cap-Base Information	-
Chromaticity Coordinate X (Nom)	0.300		
Chromaticity Coordinate Y (Nom)	0.315		
		—	

MSD Platinum (Touring/Stage)

Luminaire Design Requirements					
Pinch Temperature (Max)	350 ℃				
Product Data					
Full product code	871869644061200				
Order product name	MSD Platinum 14 R 1CT/8				
EAN/UPC - Product	8718696440612				


Order code	928196105314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928196105314
Net Weight (Piece)	80.000 g


Dimensional drawing

Produ	Product	D (max)	T (max)	0	C (max)
MSD F	ISD Platinum 14 R 1CT/8	51.5 mm	6.8 mm	0.95 mm	57.1 mm

MSD Platinum 14 R

Photometric data

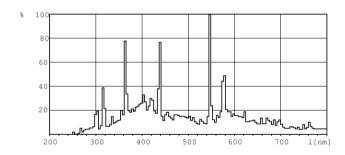

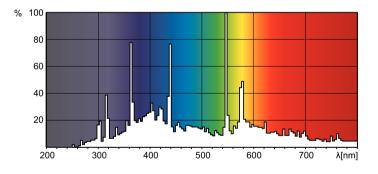



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2020, May 6 - data subject to change