

Rotary Wafer Switches




MA & MK Standard Contact Arrangements

ENGINEERING BULLETIN NO. 25a/29a

The diagrams on this Bulletin show the standard contact arrangements possible for the Models MA & MK with 30° and 45° indexing.



When specifying, please refer to these layouts, all of which (both front and rear) are viewed from the knob end with the switch in the fully anti-clockwise position; the rear being viewed through the front.

30° Indexing

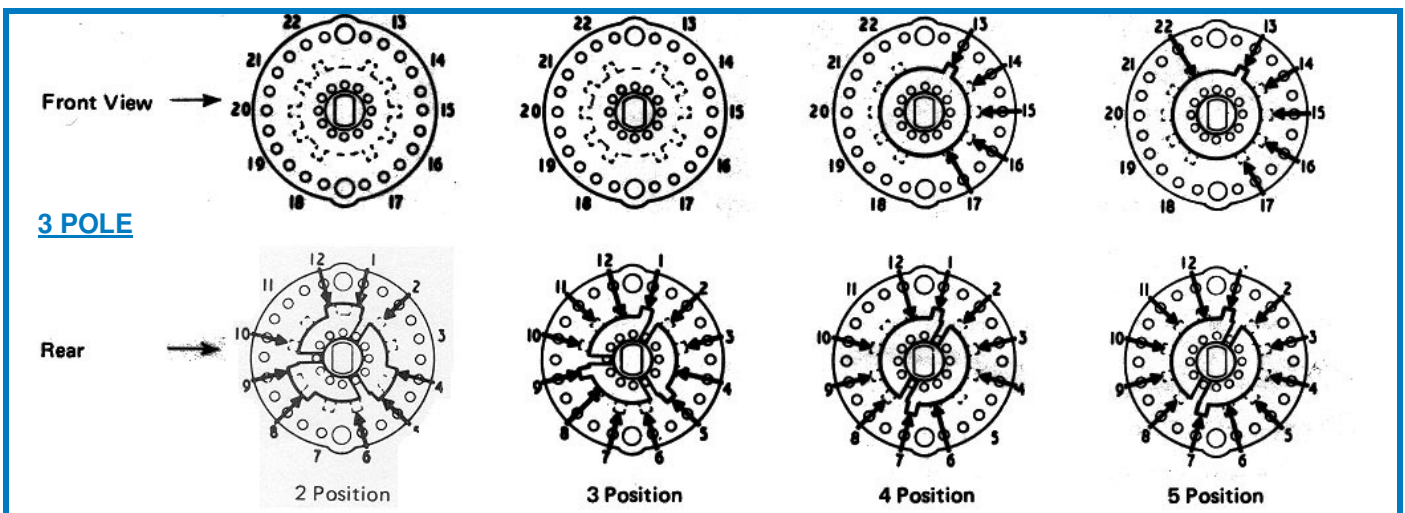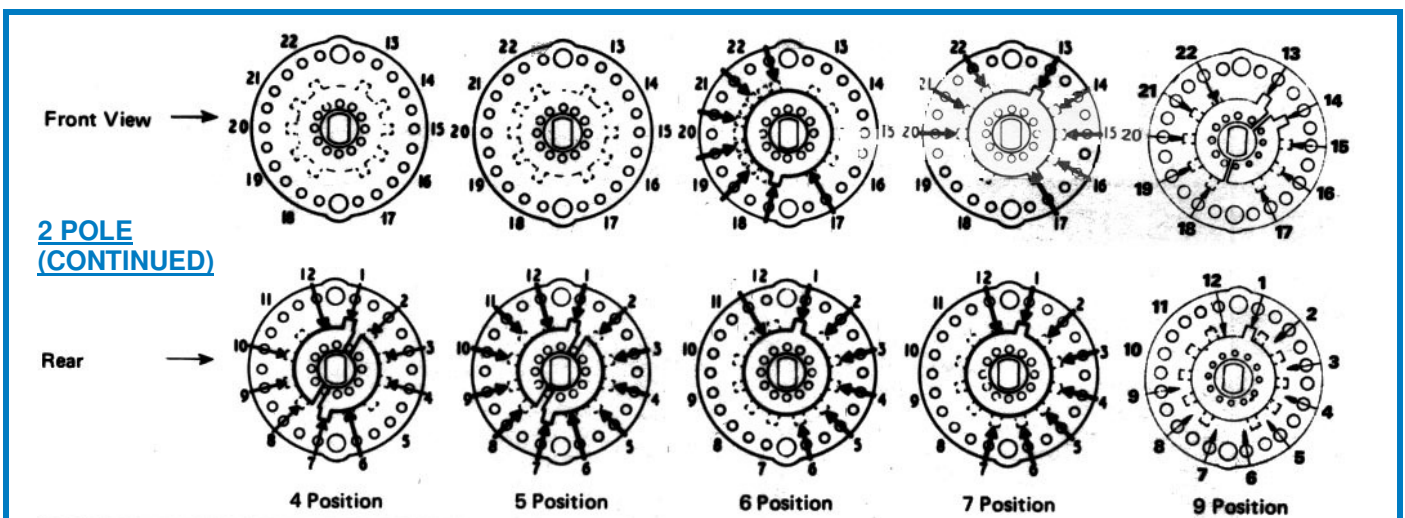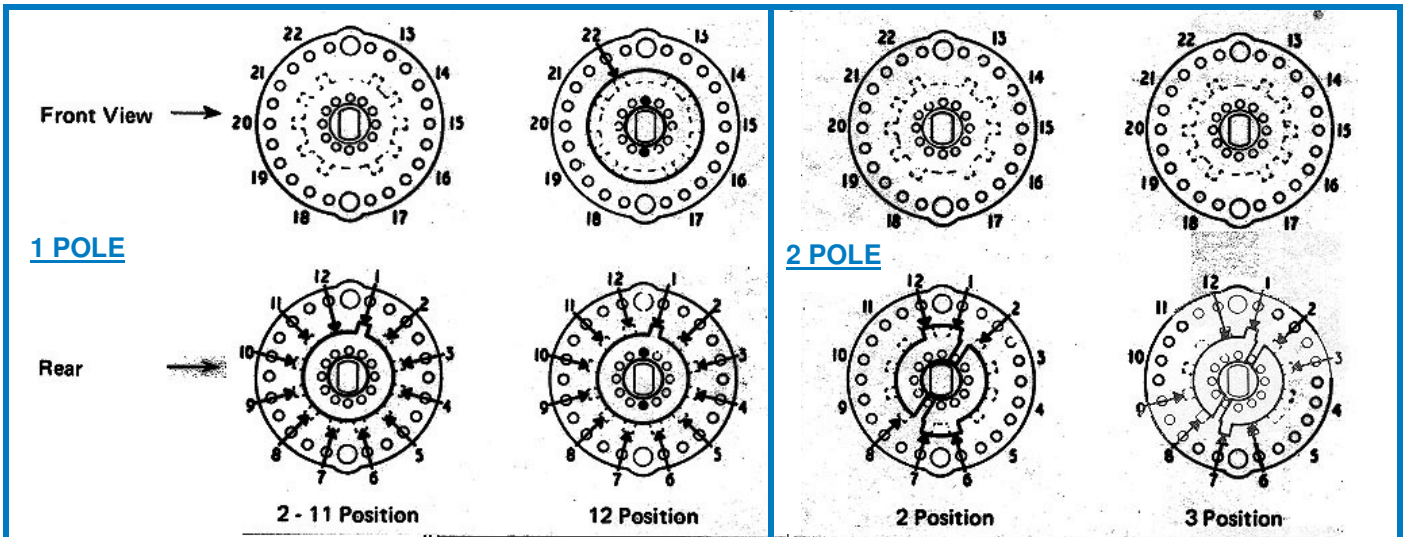


Rotary Wafer Switches

MA & MK Standard Contact Arrangements

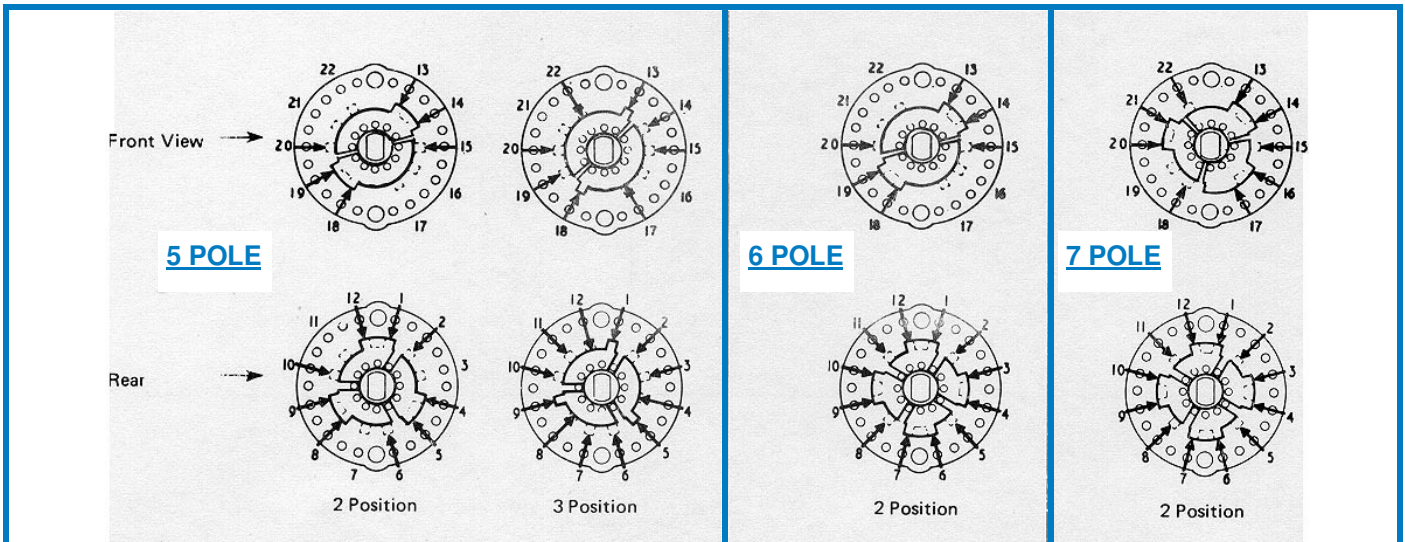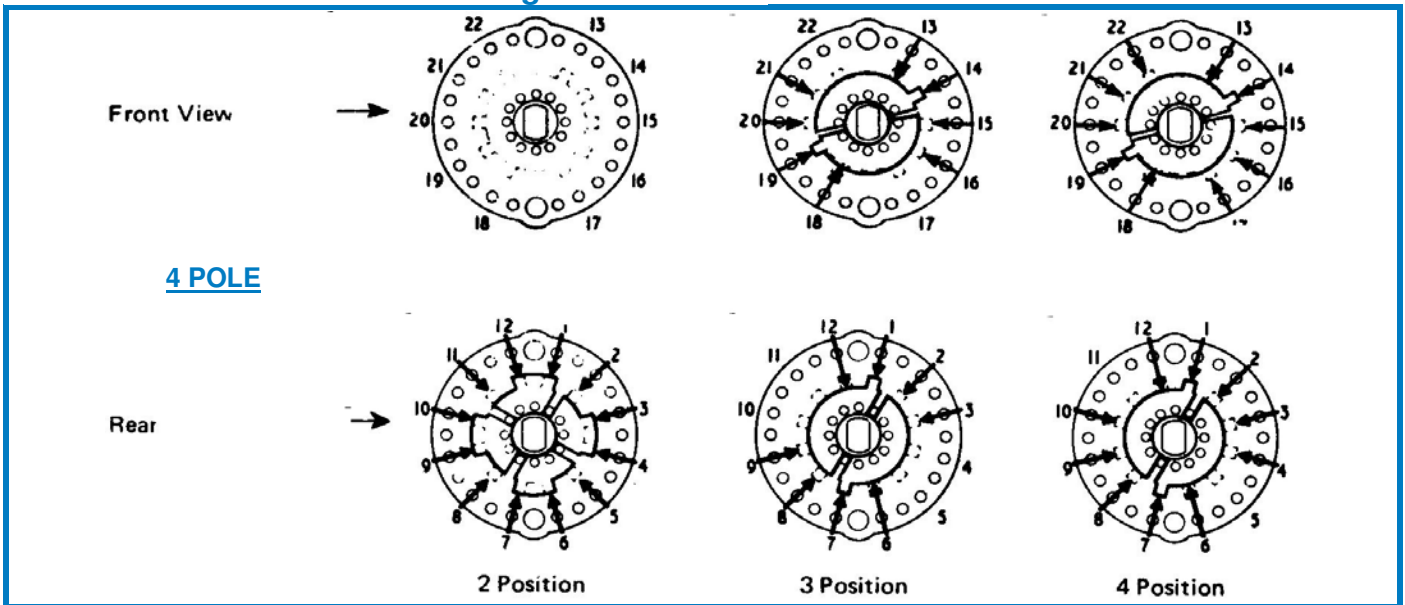

45° Indexing

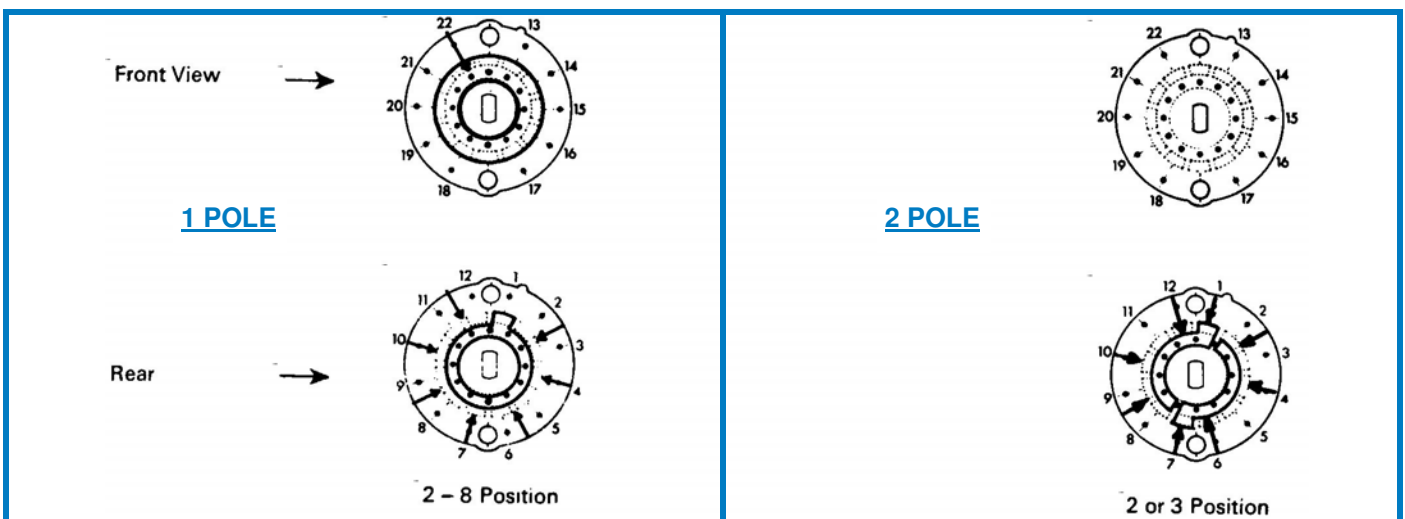

Notes

Only available for 45° indexing with non-shorting rotor blades.
Stops can only be fitted for 45° indexing at positions 3, 5 and 7.

Please Note: In line with continued development we reserve the right to amend specification without prior notice (Rev 01/12)

NSF Controls Ltd | Ingrow Bridge Works | Keighley | West Yorkshire | BD21 5EF | UK | Registered in England No. 3378269

T: +44 (0) 1535 661 144 | F: +44 (0) 1535 661 474 | E: info@nsfcontrols.co.uk | www.nsfcontrols.co.uk