



DIGITAL MONITORING RELAY FOR 3-PHASE VOLT. WITH N-COND FOR IO-LINK AC 50 TO 60 HZ 3X 160 TO 690V PHASE SEQUENCE, PHASE FAILURE PHASE ASYMMETRY UNDERVOLTAGE AND OVERVOLTAGE HYSTERESIS 1-20V NETWORK STABILIZATION TIME TRIPPING DELAY TIME 1 CO CONTACT, SPRING-LOADED CONNECTION

<b>Product function</b>		Phase monitoring relay
<b>Measuring circuit:</b>		
<b>Type of voltage for monitoring</b>		AC
<b>Number of poles for main current circuit</b>		3
Measurable voltage with AC	V	90 ... 400
<b>Adjustable voltage range</b>	V	90 ... 400
<b>Adjustable response delay time</b>		
• when starting	s	0 ... 999.9
• with lower or upper limit violation	s	0 ... 999.9
<b>Relative setting accuracy</b>	%	0.2
<b>Relative metering precision</b>	%	5
<b>Accuracy of digital display</b>		+/-1 digit
<b>Relative repeat accuracy</b>	%	1
<b>General technical data:</b>		
<b>Design of the display</b>		LCD
<b>Display version LED</b>		No
<b>Product function</b>		
• undervoltage detection		Yes
• Overvoltage detection		Yes
• phase sequence recognition		Yes
• Phase failure detection		Yes
• Asymmetry recognition		Yes
• Overvoltage detection 3 phase		Yes
• undervoltage detection 3 phases		Yes

<ul style="list-style-type: none"> <li>• Voltage window recognition 3 phase</li> <li>• External reset</li> <li>• Auto-reset</li> <li>• Adjustable open/closed-circuit current principle</li> </ul>		Yes
		Yes
		Yes
		Yes
<b>Startup time after the control supply voltage has been applied</b>	ms	1 000
<b>Response time maximum</b>	ms	450
<b>Type of voltage of the control supply voltage</b>		DC
<b>Control supply voltage</b>		
<ul style="list-style-type: none"> <li>• with AC <ul style="list-style-type: none"> <li>— at 50 Hz Rated value</li> <li>— at 60 Hz Rated value</li> </ul> </li> <li>• for DC Rated value</li> </ul>	V	0 ... 0
	V	0 ... 0
	V	24 ... 24
<b>Operating range factor control supply voltage rated value</b>		
<ul style="list-style-type: none"> <li>• for DC</li> </ul>		1 ... 1
<b>Surge voltage resistance Rated value</b>	kV	6
<b>Active power consumption</b>	W	2
<b>Protection class IP</b>		IP20
<b>Electromagnetic compatibility</b>		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
<b>Vibration resistance acc. to IEC 60068-2-6</b>		1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>Shock resistance acc. to IEC 60068-2-27</b>		sinusoidal half-wave 15g / 11 ms
<b>Installation altitude at height above sea level maximum</b>	m	2 000
<b>Conducted interference due to burst acc. to IEC 61000-4-4</b>		2 kV
<b>Conducted interference due to conductor-earth surge acc. to IEC 61000-4-5</b>		2 kV
<b>Conducted interference due to conductor-conductor surge acc. to IEC 61000-4-5</b>		1 kV
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>		6 kV contact discharge / 8 kV air discharge
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>		10 V/m
<b>Degree of pollution</b>		2
<b>Ambient temperature</b>		
<ul style="list-style-type: none"> <li>• during operation</li> <li>• during storage</li> <li>• during transport</li> </ul>	°C	-25 ... +60
	°C	-40 ... +85
	°C	-40 ... +85
<b>Galvanic isolation</b>		
<ul style="list-style-type: none"> <li>• between entrance and outlet</li> <li>• between the voltage supply and other circuits</li> </ul>		Yes
		Yes
<b>Communication/ Protocol:</b>		
<b>Type of voltage supply via input/output link master</b>		Yes
<b>IO-Link transfer rate</b>		COM2 (38,4 kBaud)

<b>Protocol is supported IO-Link protocol</b>		Yes
<b>Amount of data</b>		
<ul style="list-style-type: none"> <li>• of the address area of the outputs with cyclical transfer total</li> </ul>	byte	2
<ul style="list-style-type: none"> <li>• of the address area of the inputs with cyclical transfer total</li> </ul>	byte	4
<b>Point-to-point cycle time between master and IO-Link device minimum</b>	ms	10

### Mechanical data:

<b>Width</b>	mm	22.5
<b>Height</b>	mm	103
<b>Depth</b>	mm	91
<b>mounting position</b>		any
<b>Required spacing for grounded parts</b>		
<ul style="list-style-type: none"> <li>• forwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• Backwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• at the side</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• upwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• downwards</li> </ul>	mm	0
<b>Required spacing with side-by-side mounting</b>		
<ul style="list-style-type: none"> <li>• forwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• Backwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• at the side</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• upwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• downwards</li> </ul>	mm	0
<b>Required spacing for live parts</b>		
<ul style="list-style-type: none"> <li>• forwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• Backwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• at the side</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• upwards</li> </ul>	mm	0
<ul style="list-style-type: none"> <li>• downwards</li> </ul>	mm	0
<b>Mounting type</b>		snap-on mounting
<b>Product function removable terminal for auxiliary and control circuit</b>		Yes
<b>Type of electrical connection</b>		spring-loaded terminals
<b>Type of connectable conductor cross-section</b>		
<ul style="list-style-type: none"> <li>• solid</li> </ul>		2x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded</li> </ul>		
<ul style="list-style-type: none"> <li>— with core end processing</li> </ul>		2 x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>— without core end processing</li> </ul>		2x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• for AWG conductors</li> </ul>		
<ul style="list-style-type: none"> <li>— solid</li> </ul>		2x (24 ... 16)

— stranded

2x (24 ... 16)

#### Outputs:

Number of NO contacts delayed switching		0
Number of NC contacts delayed switching		0
Number of CO contacts delayed switching		1
Ampacity of the output relay		
• at AC-15		
— at 250 V at 50/60 Hz	A	3
— at 400 V at 50/60 Hz	A	3
• at DC-13		
— at 24 V	A	1
— at 125 V	A	0.2
— at 250 V	A	0.1
Thermal current of the switching element with contacts maximum	A	5
Operating current at 17 V minimum	mA	20
Continuous current of the DIAZED fuse link of the output relay	A	4
Mechanical service life (switching cycles) typical		10 000 000
Electrical endurance (switching cycles) at AC-15 at 230 V typical		100 000
Operating frequency with 3RT2 contactor maximum	1/h	5 000

#### Certificates/ approvals:

##### General Product Approval



CCC

[Manufacturer declaration](#)



UL

##### Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

##### other

[other](#)

[Declaration of Conformity](#)

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)



<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrymall>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG48162AA40>

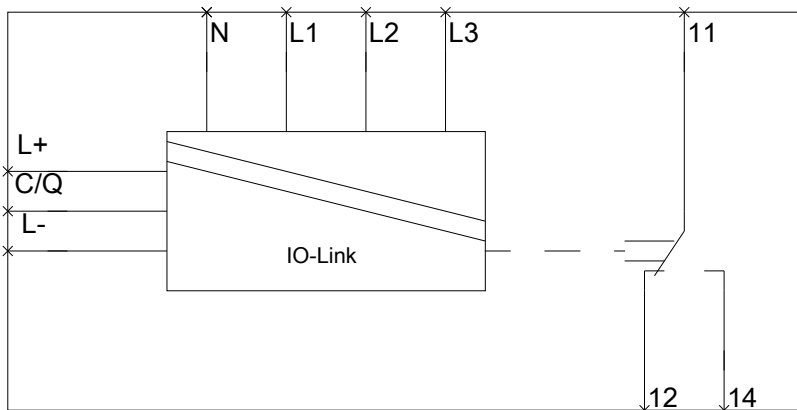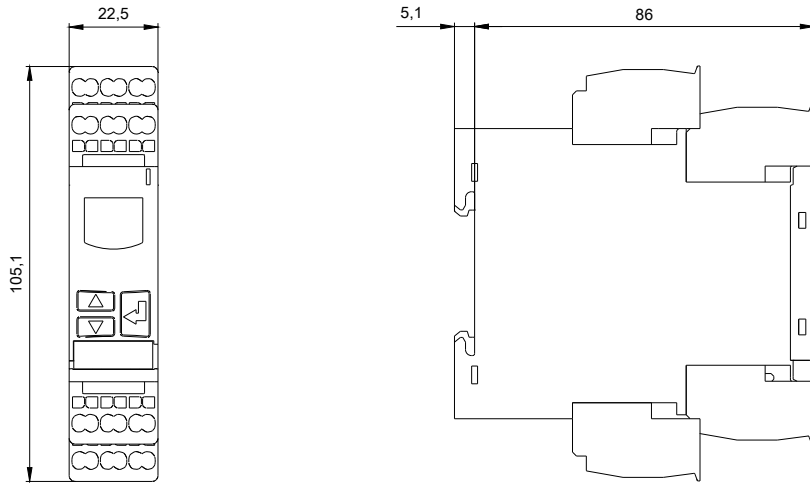

last modified:

15.01.2015