


E80377



RFID tag

ID-TAG/R20X2,5/06-896 Bit

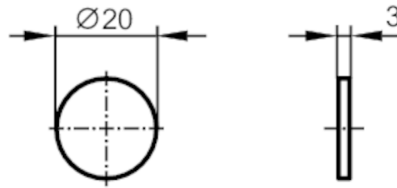

Application

Peak temperature (passive) [°C] 140; (duration of test: 1 x 100 h)

Electrical data

Operating frequency [MHz]	13,56
Memory size [bit]	896
Memory type	EEPROM
Chip type	ICODE SLIX
Number of blocks	28
Block size [Byte]	4
Unique Identification Number (UID) [Byte]	8
RFID standard	ISO 15693
Max. read cycles	unlimited
Max. write cycles	100000

Operating conditions

Ambient temperature [°C]	-40...85
Storage temperature [°C]	-40...90
Protection	IP 68

Tests / approvals

Radio approval	ISO 15693
----------------	-----------

Mechanical data

Weight [g]	2.3
Type of mounting	installation on non-metal materials; (sticking to a surface)
Dimensions [mm]	Ø 20 / L = 3
Materials	PPA

Remarks

Pack quantity	1 pcs.
---------------	--------

E80377



RFID tag

ID-TAG/R20X2,5/06-896 Bit

Other data

read distance (mm)

ANT410	14
ANT411	20
ANT420 / DTM424 / DTM426	12
ANT421 / DTM425 / DTM427	30
ANT430 / DTM434 / DTM436	25
ANT431 / DTM435 / DTM437	40
ANT513 / DTC510	50
ANT515 / ANT516	25
ANT600	110