



# **WEIGHT**

.17g/cm (.015 oz/in)

# MATERIALS AND FINISH HOUSING


#### HOUSING


## Material:

.005-in. (.13-mm) thick Beryllium Copper per ASTM B-194 or Stainless Steel per MIL-S-5059

#### Finish:

See finish table on opposite page

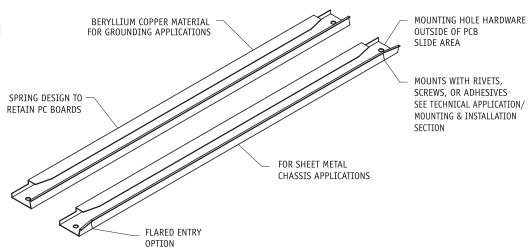

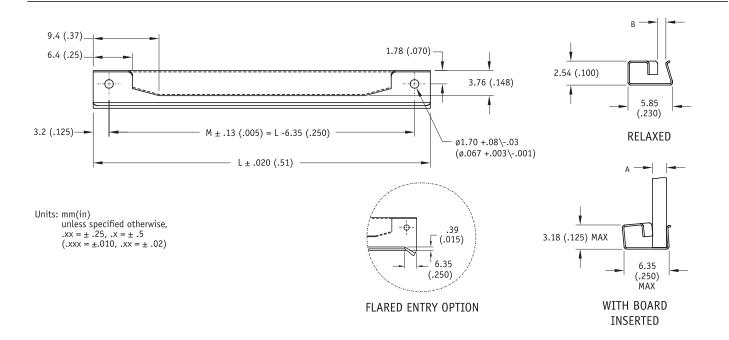

#### **MATERIALS TABLE**


CODE	MATERIAL
LETTER	
В	BERYLLIUM COPPER, 1/4H PER ASTM-B-194
BH	BERYLLIUM COPPER, 1/4HT PER QQ-C-533, HEAT TREATED
CR	STAINLESS STEEL, TYPE 301 COND 1/4 H PER AMS 5517

## **BOARD THICKNESS TABLE**

	BOARD	RELAXED
	THICKNESS	+.00/38 (+.000/015)
DASH#	Α	В
-1	0.79 (.031)	0.64 (.025)
-2	1.60 (.063)	1.40 (.055)
-3	2.36 (.093)	2.16 (.085)

### **FINISH TABLE**

DASH#	
[blank]	SILVER PLATE PER QQ-S-365, TYPE III, GRADE A
-1	NONE
-2	EBANOL PER MIL-F-495 FOR BERYLLIUM COPPER PER MIL-C-13924 FOR STEEL
-3	CADMIUM PER QQ-P-416, TYPE 2, CLASS 2
-4	COPPER PLATE PER MIL-C-14550, CLASS 2
-5	GOLD PLATE PER MIL-G-45204, TYPE 1, GLASS 1
-6	NICKEL PLATE PER QQ-N-290, CLASS 1, GRADE G, BRIGHT
-7	ZINC PLATE CLEAR CHROMATE, PER ASTM-B-633, Fe/Zn 8
-8	ZINC PLATE YELLOW CHROMATE, PER ASTM-B-633, Fe/Zn 8

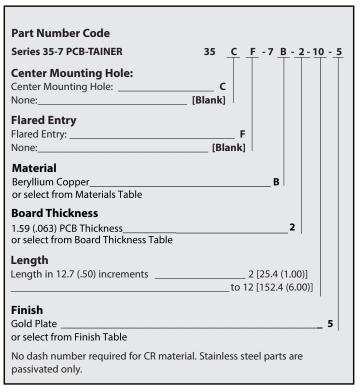

## Part Number Code example: 35-7B-3-12-6

35 Series PCB-TAINER, Beryllium Copper, 2.38-mm (.093-in.) thick board, 152.4-mm (6.00-in.) long, Nickel Plate finish.

