



Advantages

- Fastenings at angles up to 30° per side
 - Quick feeding of the key into the screw thanks to feeding from various angles
 - The key does not slip out of the screw, which reduces the risk of accidents
 - No deformation of the screw head thanks to precision fitting of the ball end
- Fastenings at angles up to 25° per side
 - Higher torque transmission due to maximum core diameter
 - Elongated profile positioning for further use of the L-key
- Thanks to the combination of MagicRing® with the Wiha ball end, inserting and removing screws is possible, even in hard-to-reach locations
 - Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - Can be used for all standard screws
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
 - Fastenings at angles up to 25° per side
- Securely holds screws made of steel and non-magnetic materials such as stainless steel, titanium, aluminium and plastics in any position
 - TORX® and TORX PLUS® screws manufactured according to Camcar Textron specifications
 - Use for applications in which magnetised fastening tools cannot and may not be used (magnetic environment)!
- Reduction of the short L-key arm, especially for hard-to-reach screws and confined spaces
 - Increase in the hand working space of over 30% and thus a reduction of the risk of injury to the knuckles and fingertips thanks to a 95° bend of the L-key
 - Improved access through a reduction of the L-key head height of up to 15%
 - Ball end geometry enables fastening at an angle of up to 25°
- Handles and holders in the same colour depending on the output size
 - This provides an overview of the tool assortment

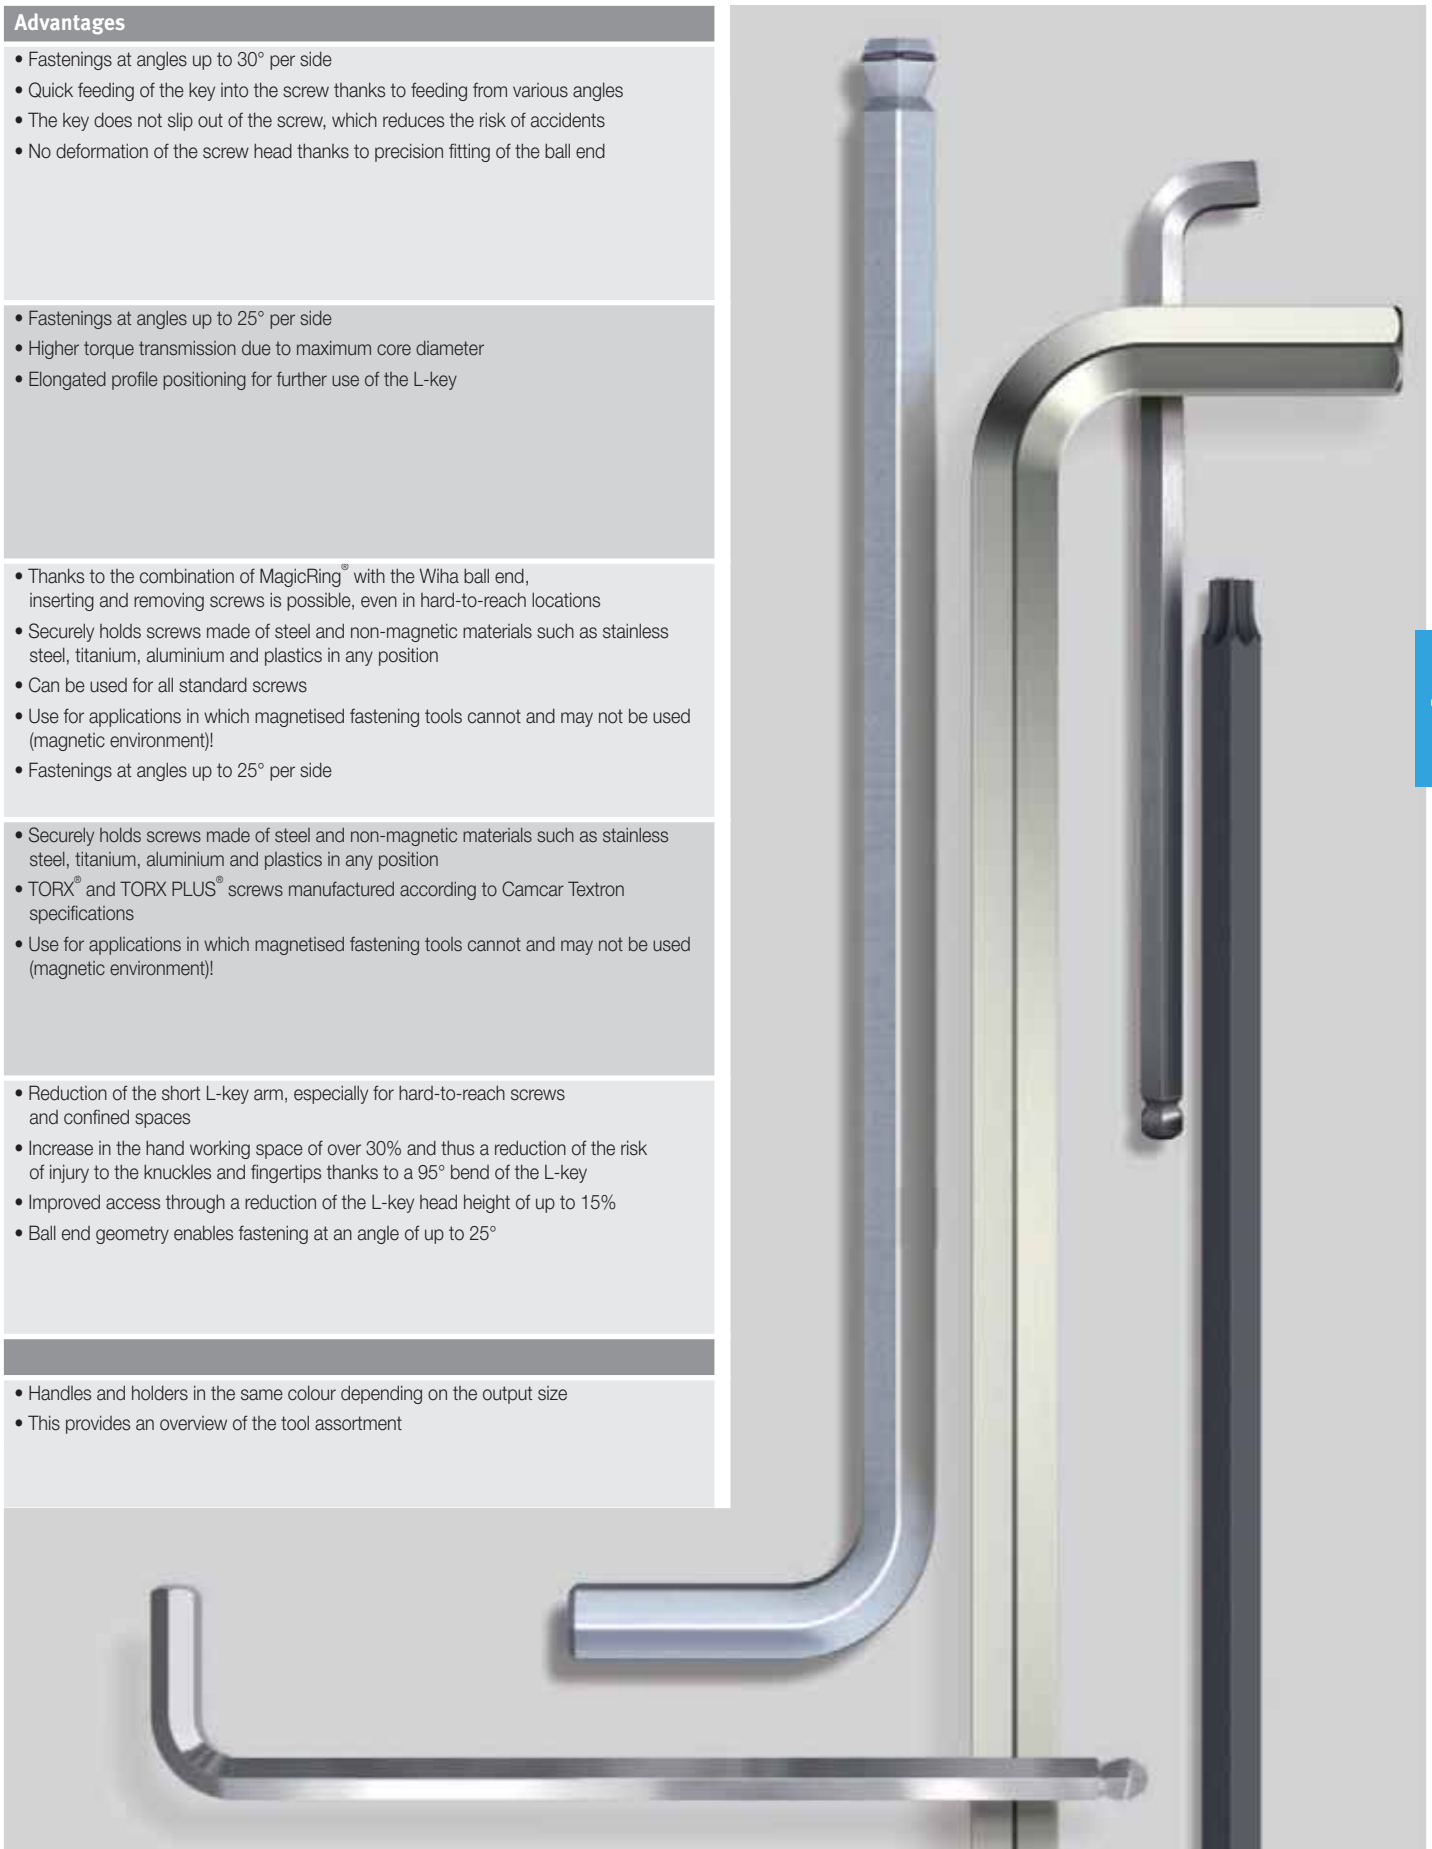

Wiha hexagon L-key (inch).

For Allen screws (inch).

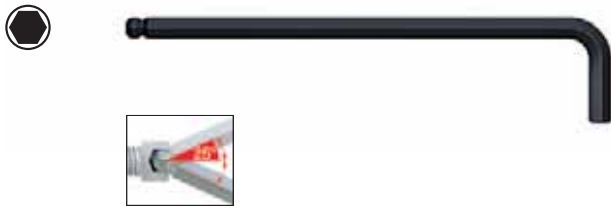

369 Zoll Ball end hex L-key, long.
Inch sizes.

Blade: Chrome-vanadium steel, through-hardened, black finish.
Standards: Based on ASME B18.3.
Application: Especially for inch-sized screws that are difficult to access.
Extra: The ball end enables the user to work at angles up to 25°.

Order-No.	●	↔	↓	mm	↔
01422	0.05	72	13	1.27	10
01423	1/16	80	15	1.59	10
01431	5/64	88	18	1.98	10
01427	3/32	101	20	2.38	10
01433	7/64	111	21	2.78	10
01425	1/8	121	23	3.18	10
01434	9/64	136	27	3.57	10
01430	5/32	148	29	3.97	10
01426	3/16	163	33	4.76	10
01432	7/32	176	36	5.56	10
01424	1/4	191	38	6.35	10
01429	5/16	210	43	7.94	10
01428	3/8	232	49	9.53	5

For Allen screws (inch).



369 SZ13B Ball end hex L-key set in ProStar.
Black finish, 13 pcs. inch design.

Blade: Chrome-vanadium steel, through-hardened, black finish.
Standards: Based on ASME B18.3.
Application: Especially for inch-sized screws that are difficult to access.
Extra: Space saving ProStar allows the easy removal of each key without moving any others.

Order-No.	Series	↔
24189	369 SZ13B	5
● 369 Zoll	0.05 1/16 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4 5/16 3/8	

SB 369 SZ13B Hexagon ball end L-key set in Classic holder.
Black finish, 13 pcs. inch design.
Blister packed.

Order-No.	Series	↔
24851	SB 369 SZ13B	5
● 369 Zoll	0.05 1/16 5/64 3/32 7/64 1/8 9/64 5/32 3/16 7/32 1/4 5/16 3/8	



369 HZ8 Hexagon ball end L-key set in Classic holder.
Black finish, 8 pcs. inch design.

Blade: Chrome-vanadium steel, through-hardened, black finish.
Standards: Based on ASME B18.3.
Application: Especially for inch-sized screws that are difficult to access.
Extra: Popular key sizes kept in a well-organised holder.
Simple, rapid operation with solid stopping point for L-keys.

Order-No.	Series	↔
01420	369 HZ8	5
● 369 Zoll	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16	

SB 369 HZ8 Hexagon ball end L-key set in Classic holder.
Black finish, 8 pcs. inch design.
Blister packed.

Order-No.	Series	↔
02939	SB 369 HZ8	10
● 369 Zoll	5/64 3/32 1/8 5/32 3/16 7/32 1/4 5/16	